

Tel:
Fax:

Report No.:

Test Time: 2022-10-07 13:50

Luminaire Property

Luminaire Manufacturer:
Lamp Catalog: L 1010-50w
Luminous Width (mm): 70
Voltage: 225.9 V
Power: 48.23 W


Luminous Length (mm): 1010
Luminous Height (mm): 40
Current: 0.234 A
Power Factor: 0.910

Photometric Results


CIE Class: Direct
Measurement Flux: 6922.1 lm
Downward Ratio: 99%
Field Angle: H172.7 V158.3
Luminaire Efficacy Rating (LER): 144
Max. Intensity: 1758.62 cd

Total Rated Lamp Lumens: 6922.1 lm
Efficiency: 100%
Upward Ratio: 1%
Beam Angle: H167.6 V110.1
Central Intensity: 1551.2 cd
Pos of Max. Intensity: H180 V51

Picture Of Luminaire



Luminous Intensity Distribution Curve

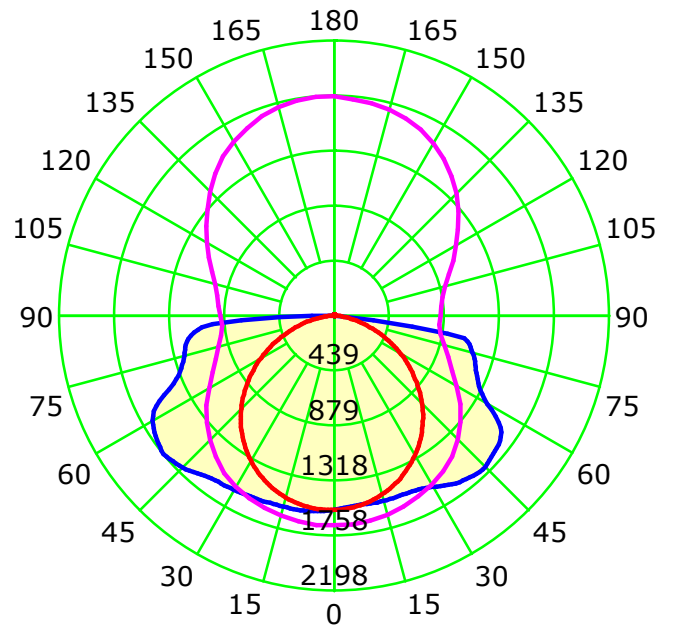



Unit: cd

— C0-C180 — C90-C270 — G51

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.140 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve

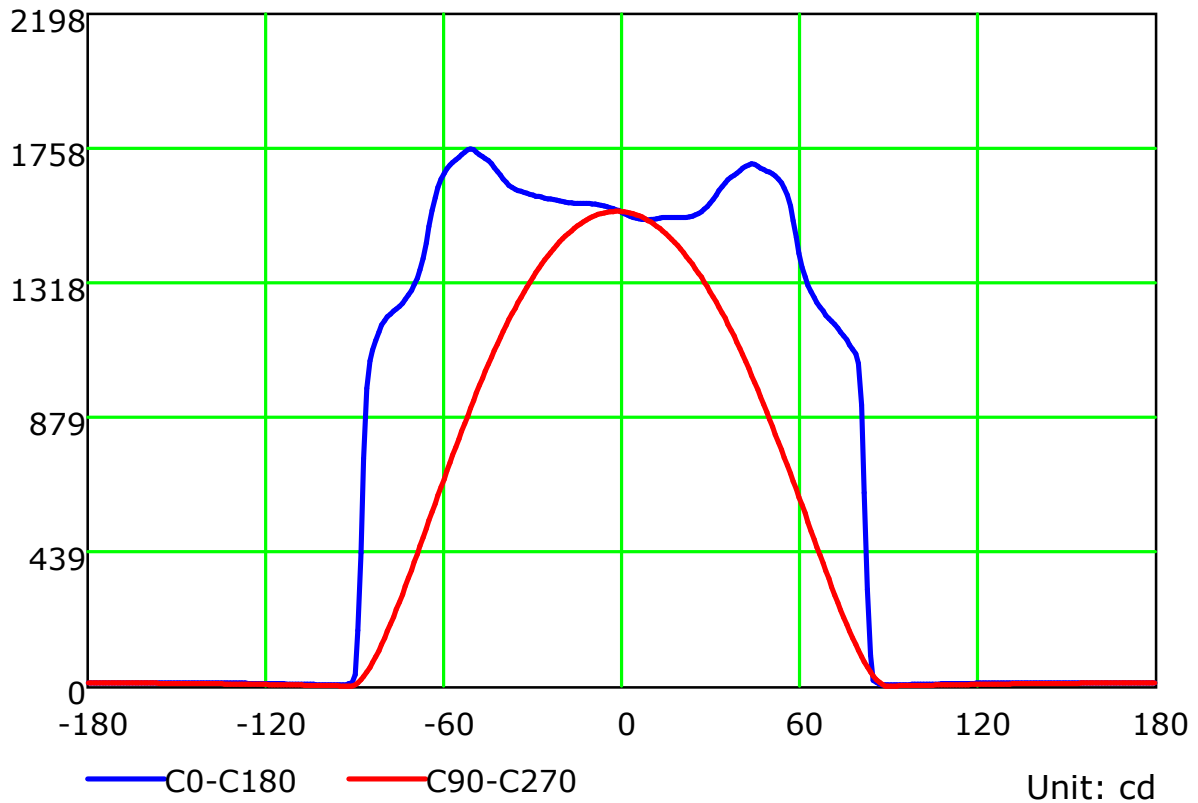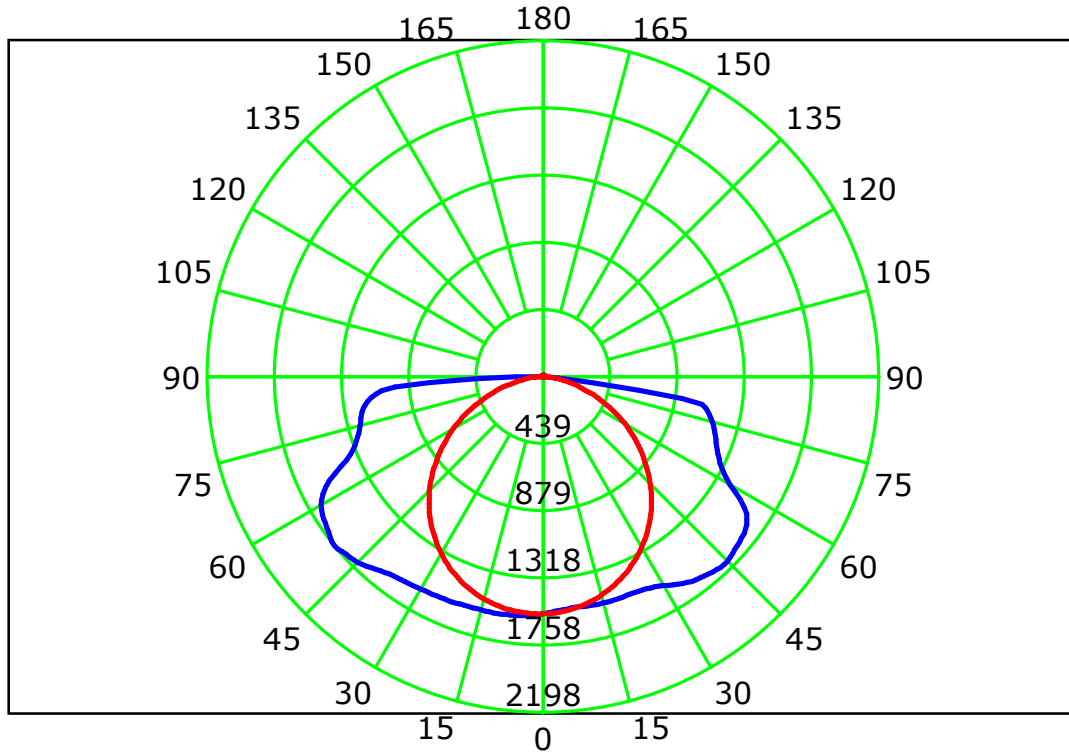

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.140 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

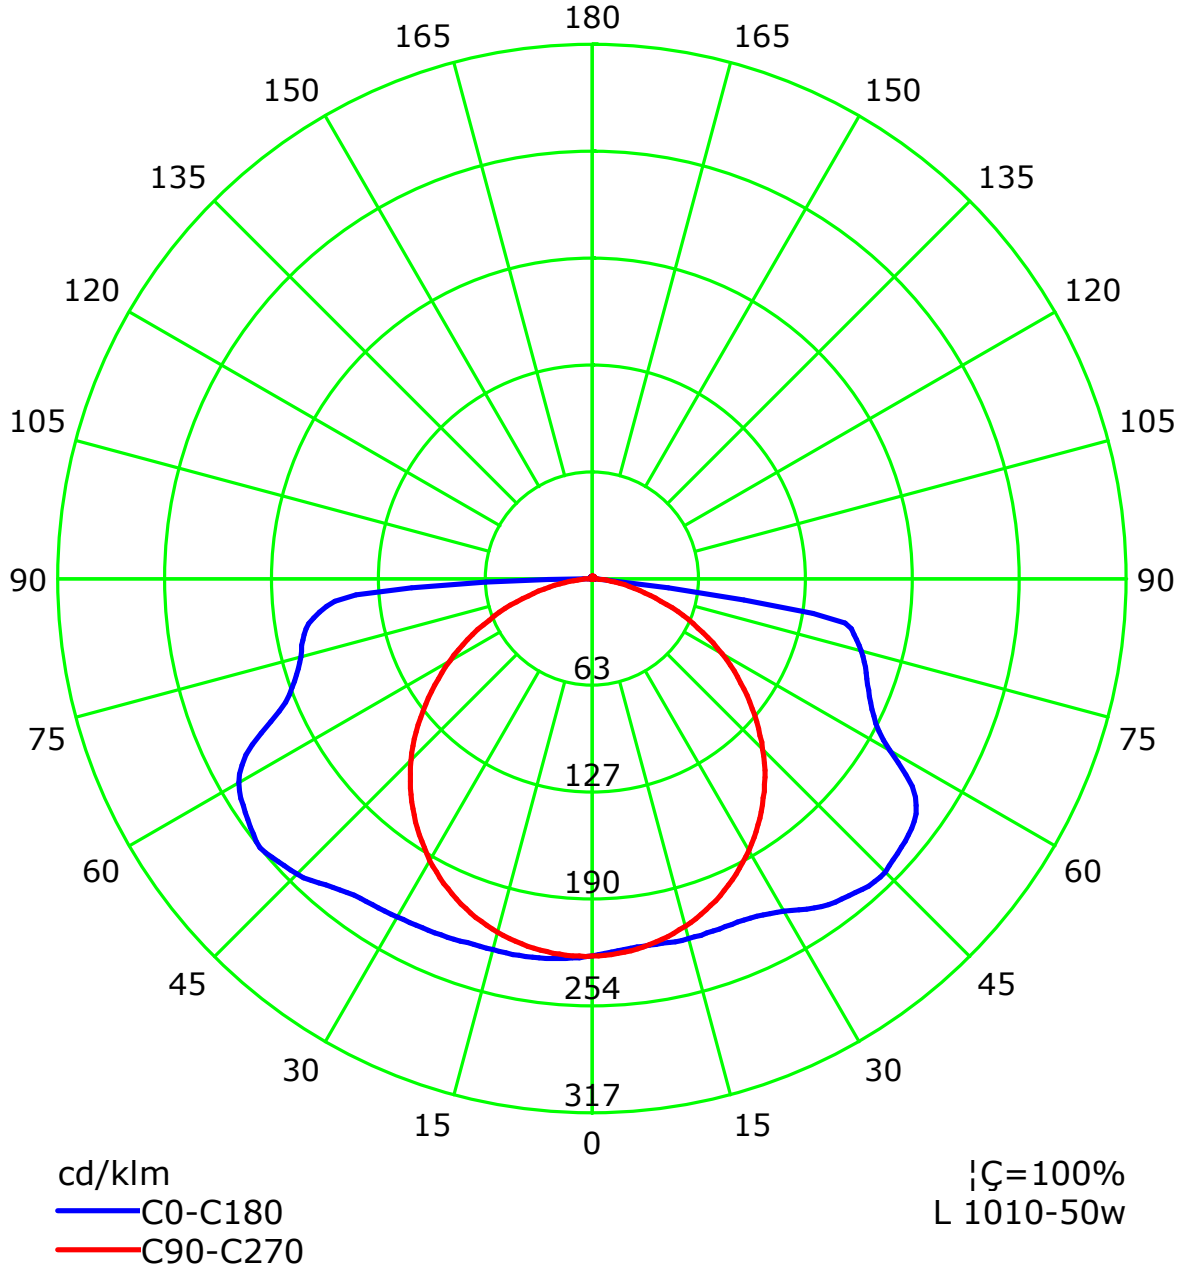

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	105	99	93	88	102	96	91	86	92	87	83	88	84	81	84	81	78	76
2	94	83	75	68	91	81	74	67	78	71	65	74	68	64	71	66	62	59
3	84	72	62	54	81	70	61	54	67	59	53	64	57	51	61	55	50	48
4	76	62	52	45	74	61	51	44	58	50	43	56	48	43	53	47	42	39
5	70	55	45	37	67	54	44	37	52	43	37	49	42	36	47	41	36	33
6	64	49	39	32	62	48	39	32	46	38	31	44	37	31	42	36	31	28
7	59	44	35	28	57	43	34	28	42	33	27	40	33	27	39	32	27	25
8	55	40	31	24	53	39	30	24	38	30	24	36	29	24	35	29	24	22
9	51	37	28	22	50	36	27	22	35	27	21	34	26	21	32	26	21	19
10	48	34	25	19	46	33	25	19	32	24	19	31	24	19	30	24	19	17


Spacing Criteria (0-180): 1.63
 Spacing Criteria (90-270): 1.26
 Spacing Criteria (Diagonal): 1.64

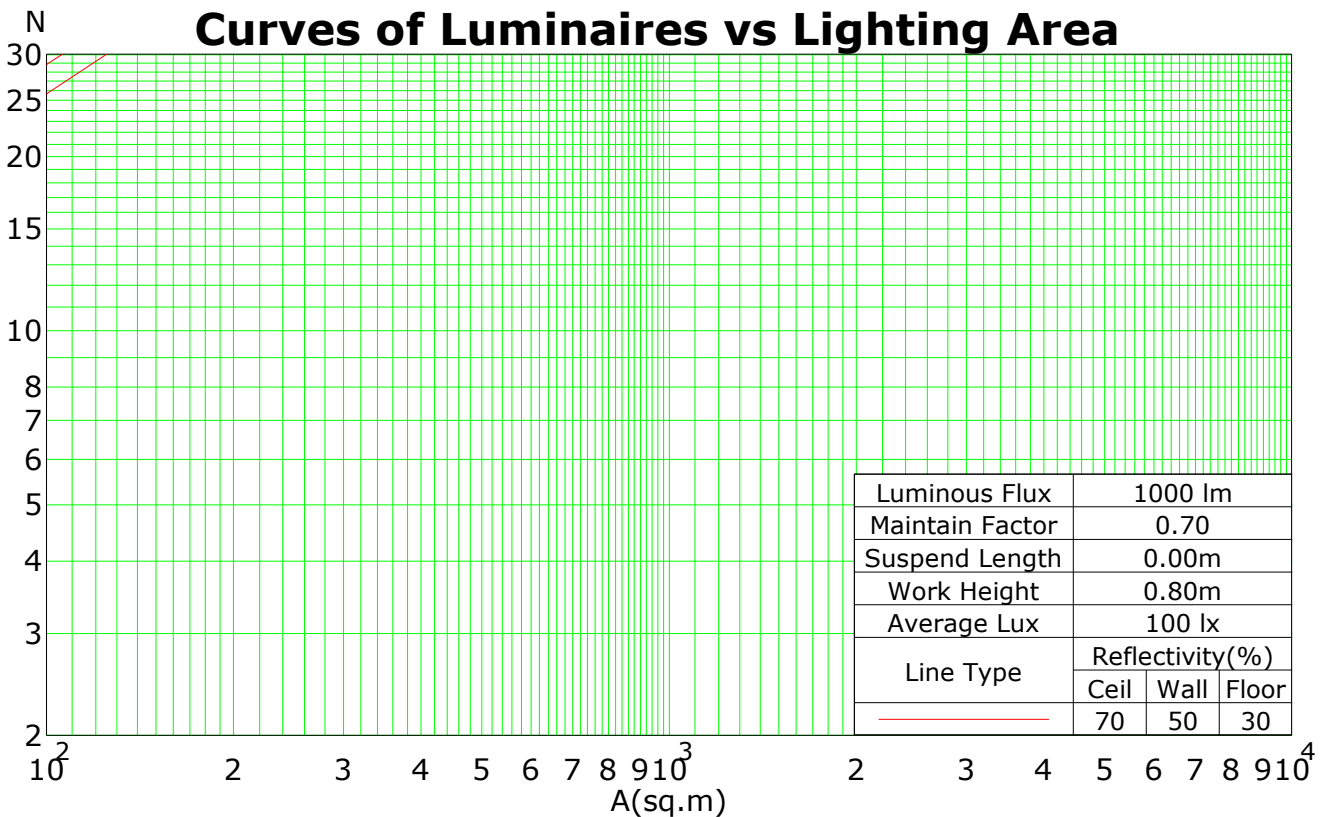

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:


Isocandela (rectangle)

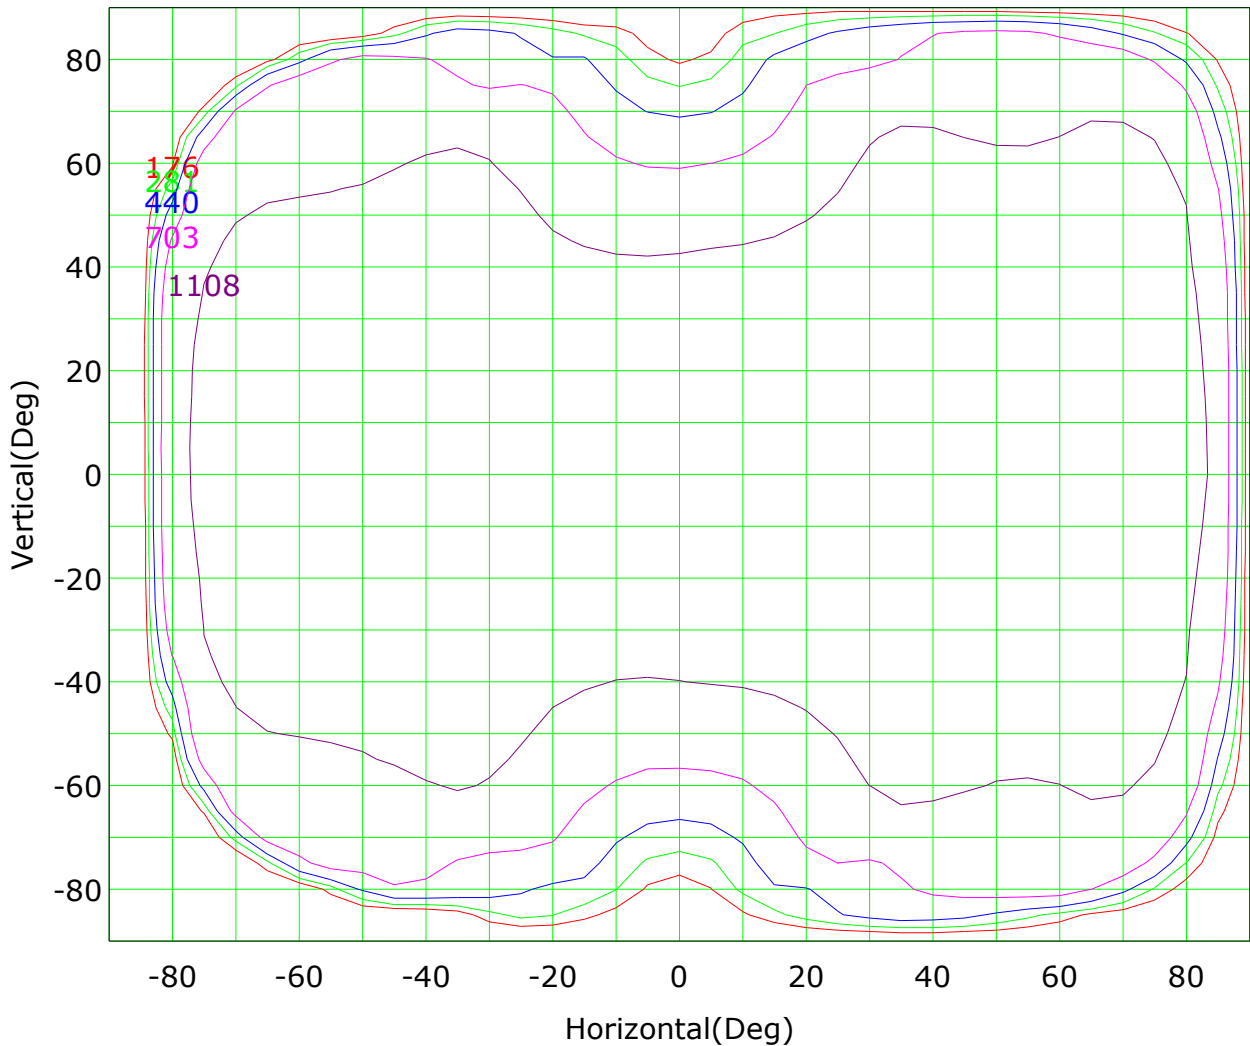

Imax (100%): 1759 cd

- | | |
|-----------------|-----------------|
| (10%): 176 cd | (16%): 281 cd |
| (25%): 440 cd | (40%): 703 cd |
| (63%): 1108 cd | (100%): 1759 cd |

Isocandela (sphere)

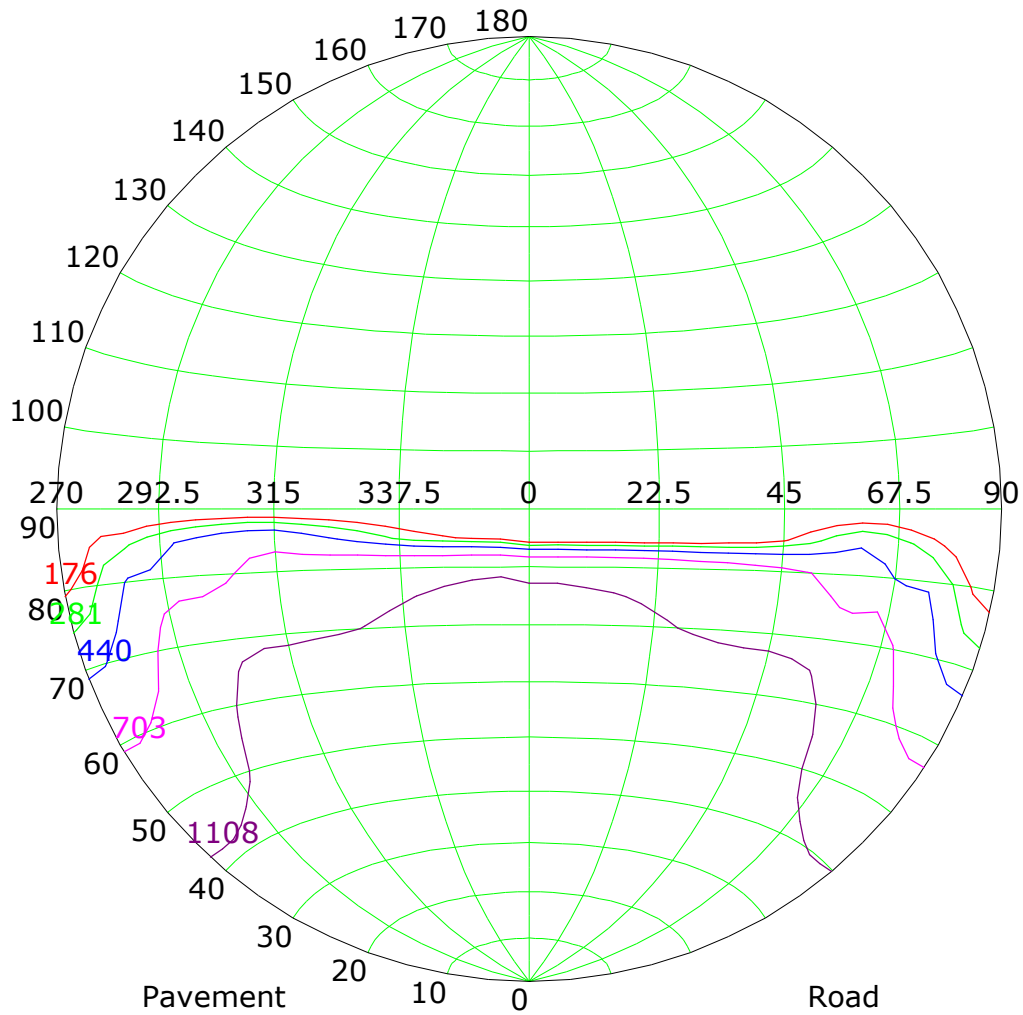


Imax (100%): 1759 cd

(10%): 176 cd	(16%): 281 cd
(25%): 440 cd	(40%): 703 cd
(63%): 1108 cd	(100%): 1759 cd

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.140 m
Humidity:
Inspector:

IsoLux Plot

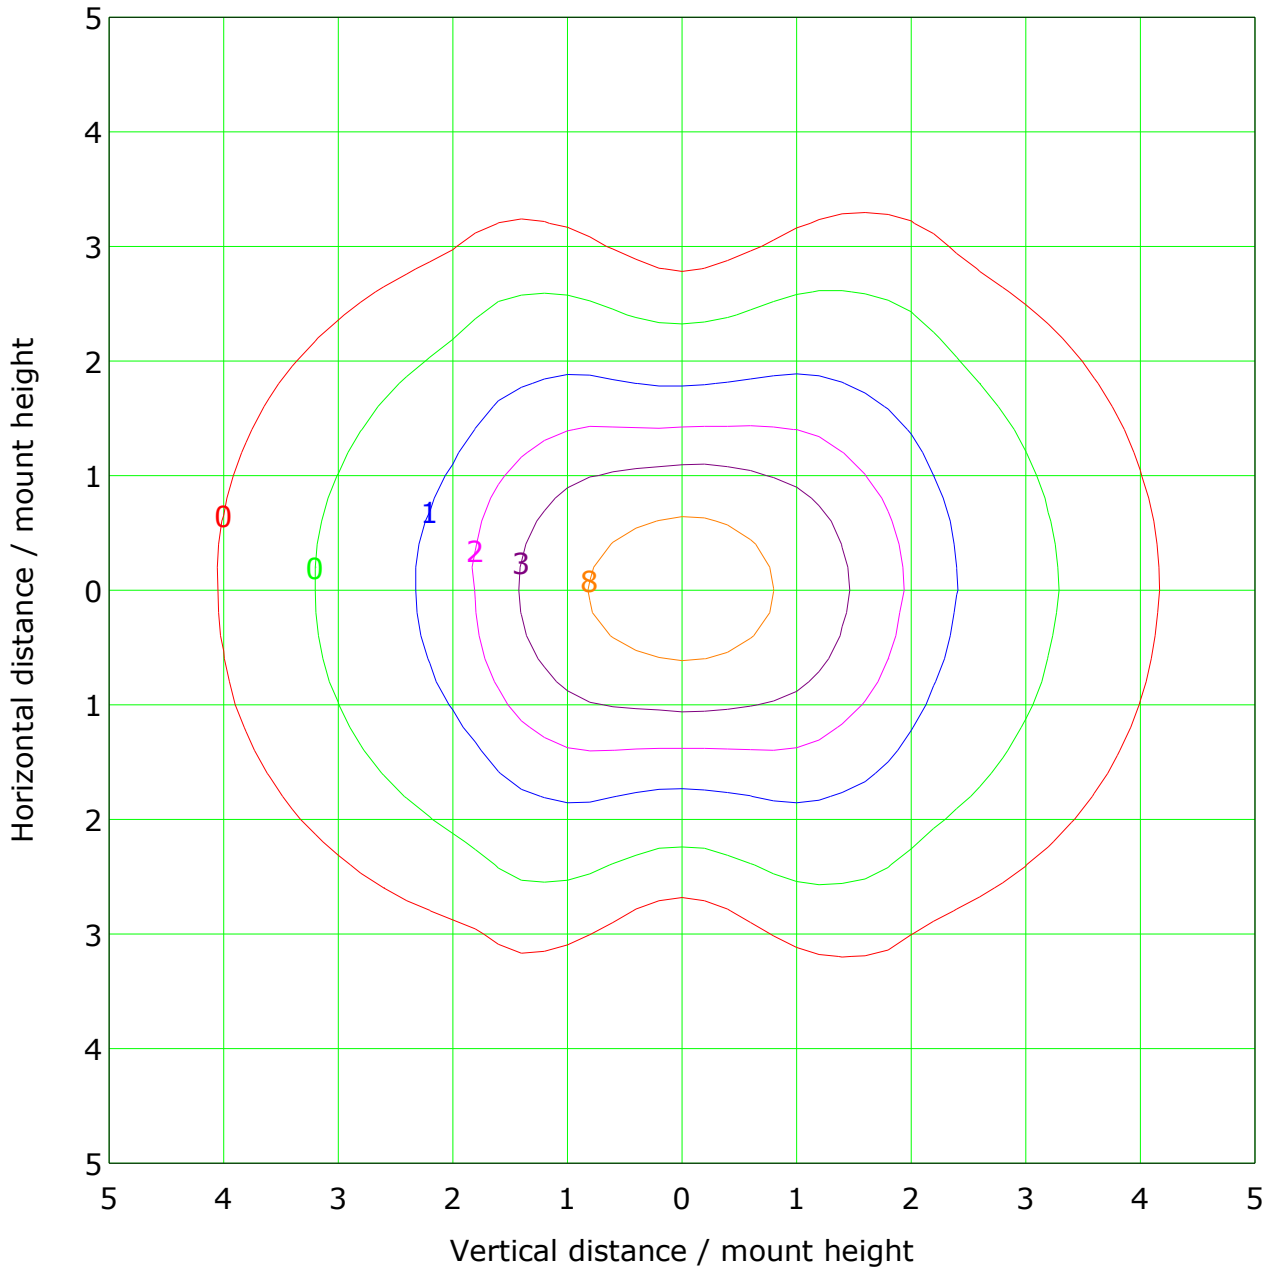

Mounting Height: 10.0m Max Lux(100%): 15.6 lx


(1%): 0.2 lx	(2%): 0.3 lx
(5%): 0.8 lx	(10%): 1.6 lx
(20%): 3.1 lx	(50%): 7.8 lx
(100%): 15.6 lx	

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.140 m
Humidity:
Inspector:

Roadway CU Curve

Efficiency(%)


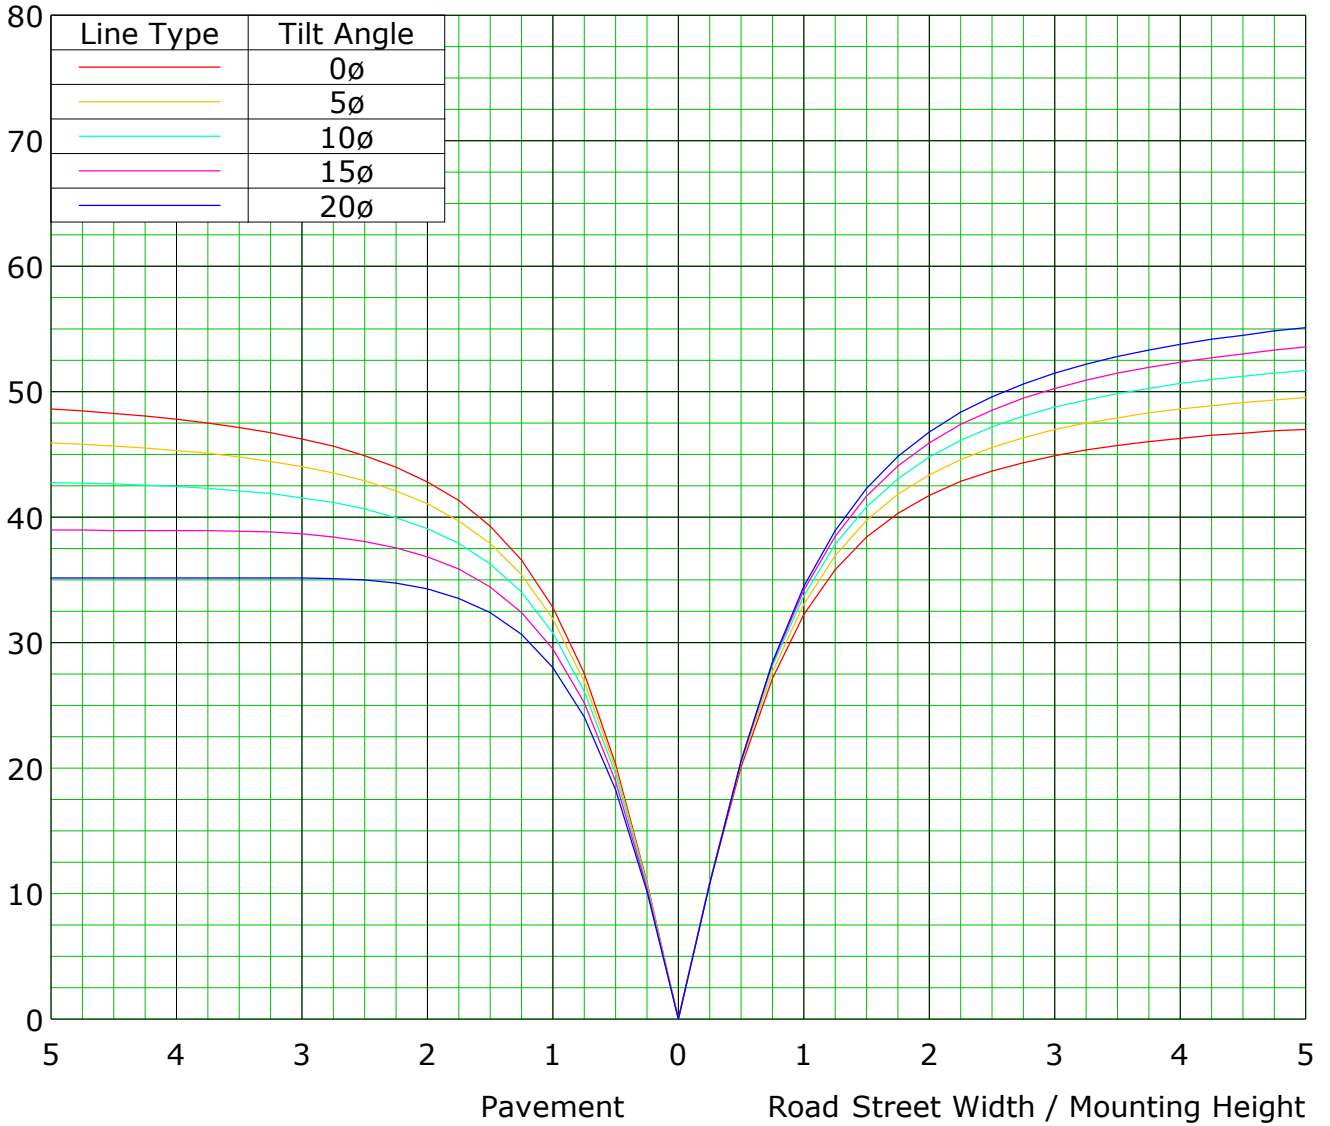


C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

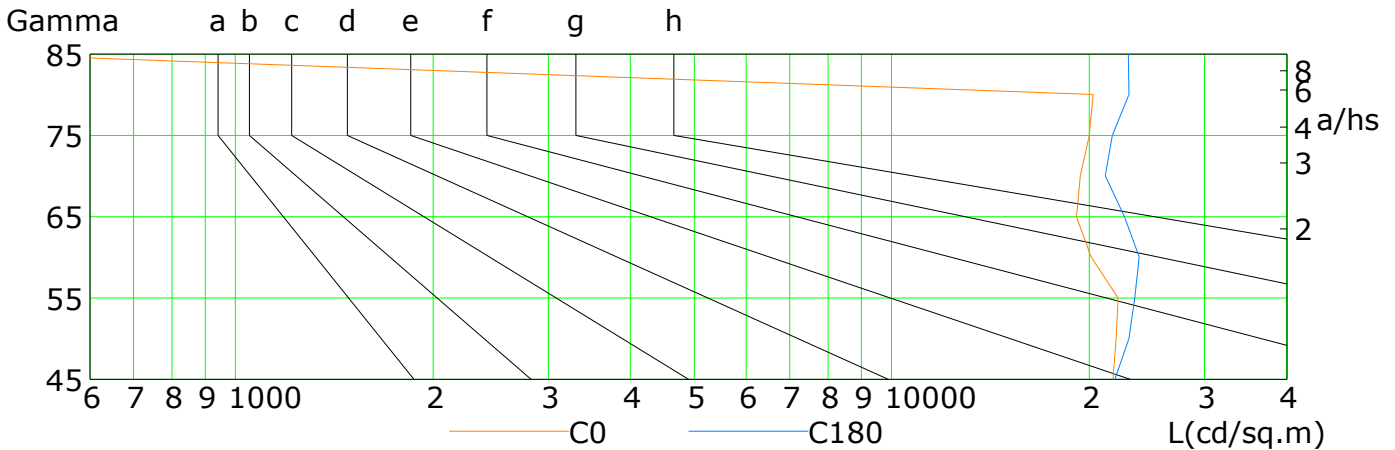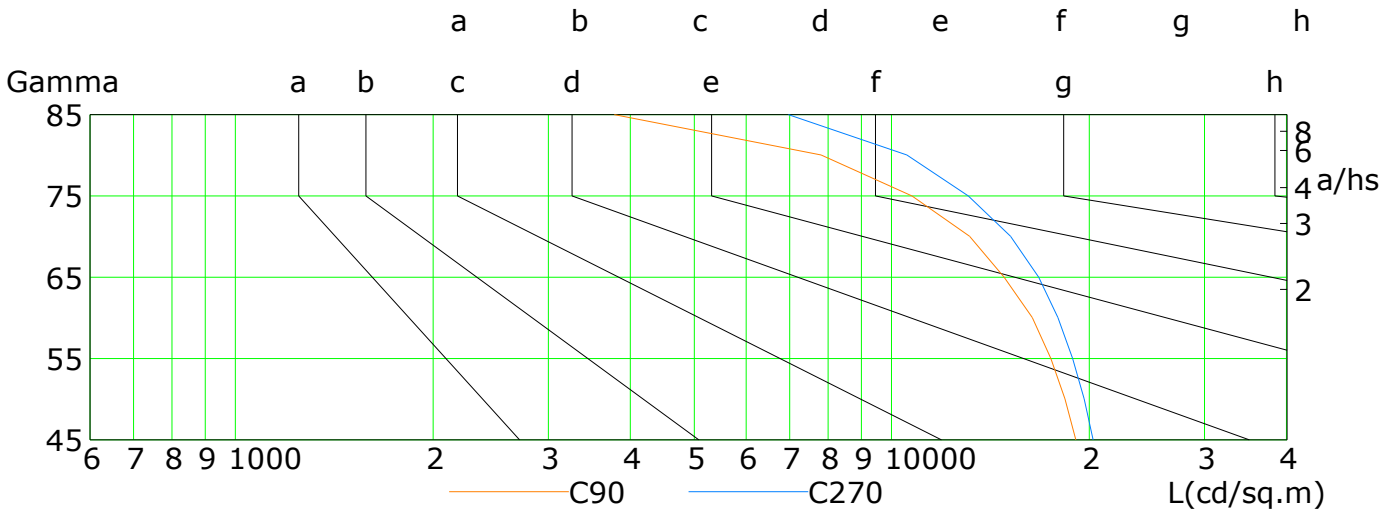


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	21736	22008	22124	20124	19124	19366	19997	20292	417
C90	19105	18353	17468	16385	14848	13138	10733	7811	3780
C180	21891	22970	23486	23861	22626	21144	21678	22998	22925
C270	20299	19652	18872	17936	16760	15165	13082	10553	6967


C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Illuminance at a Distance

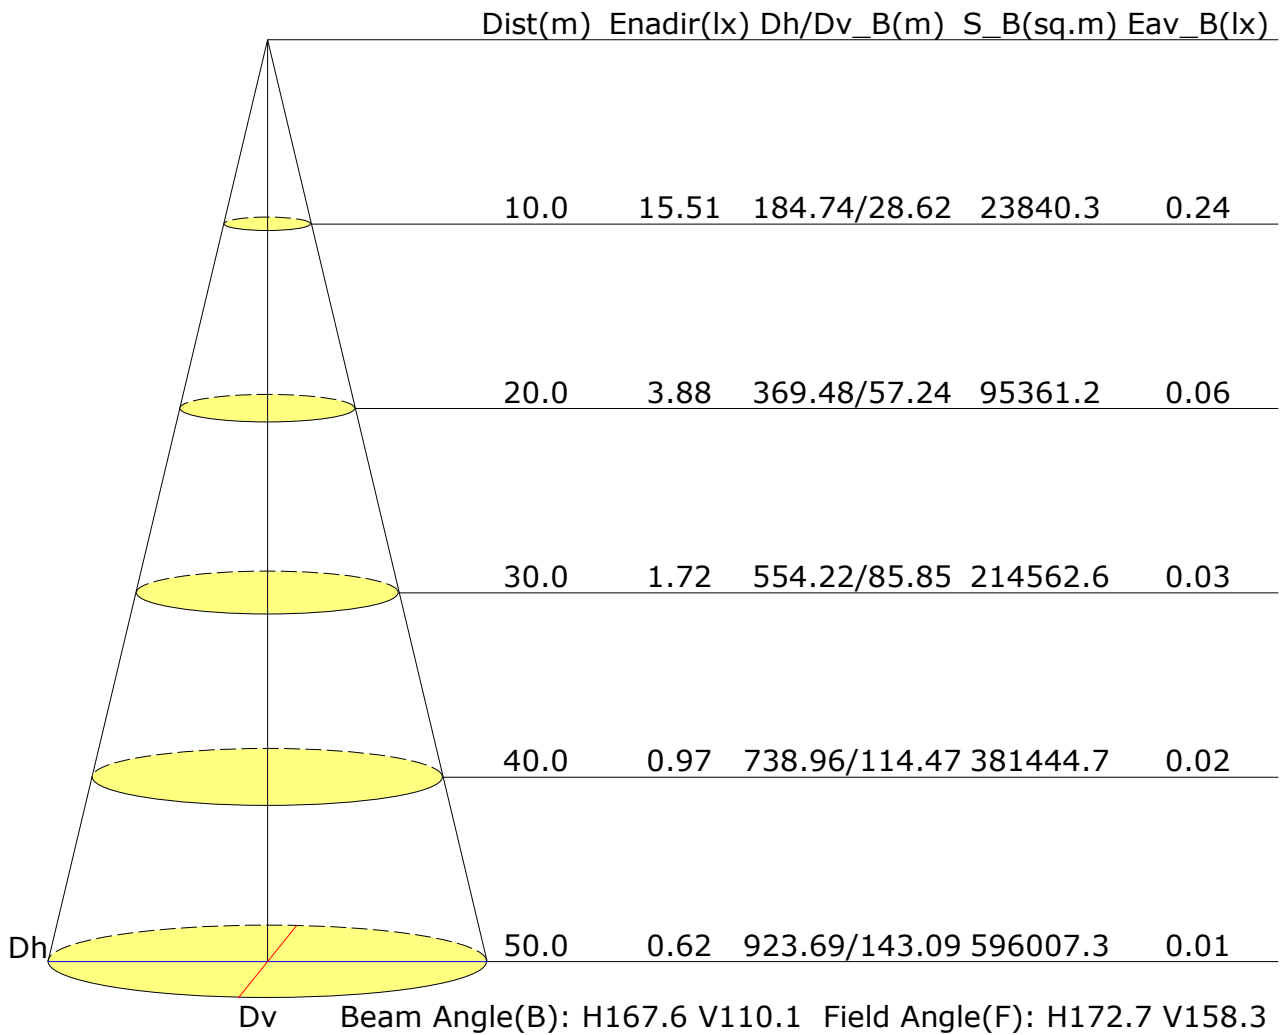

Vertical IsoLux Plot

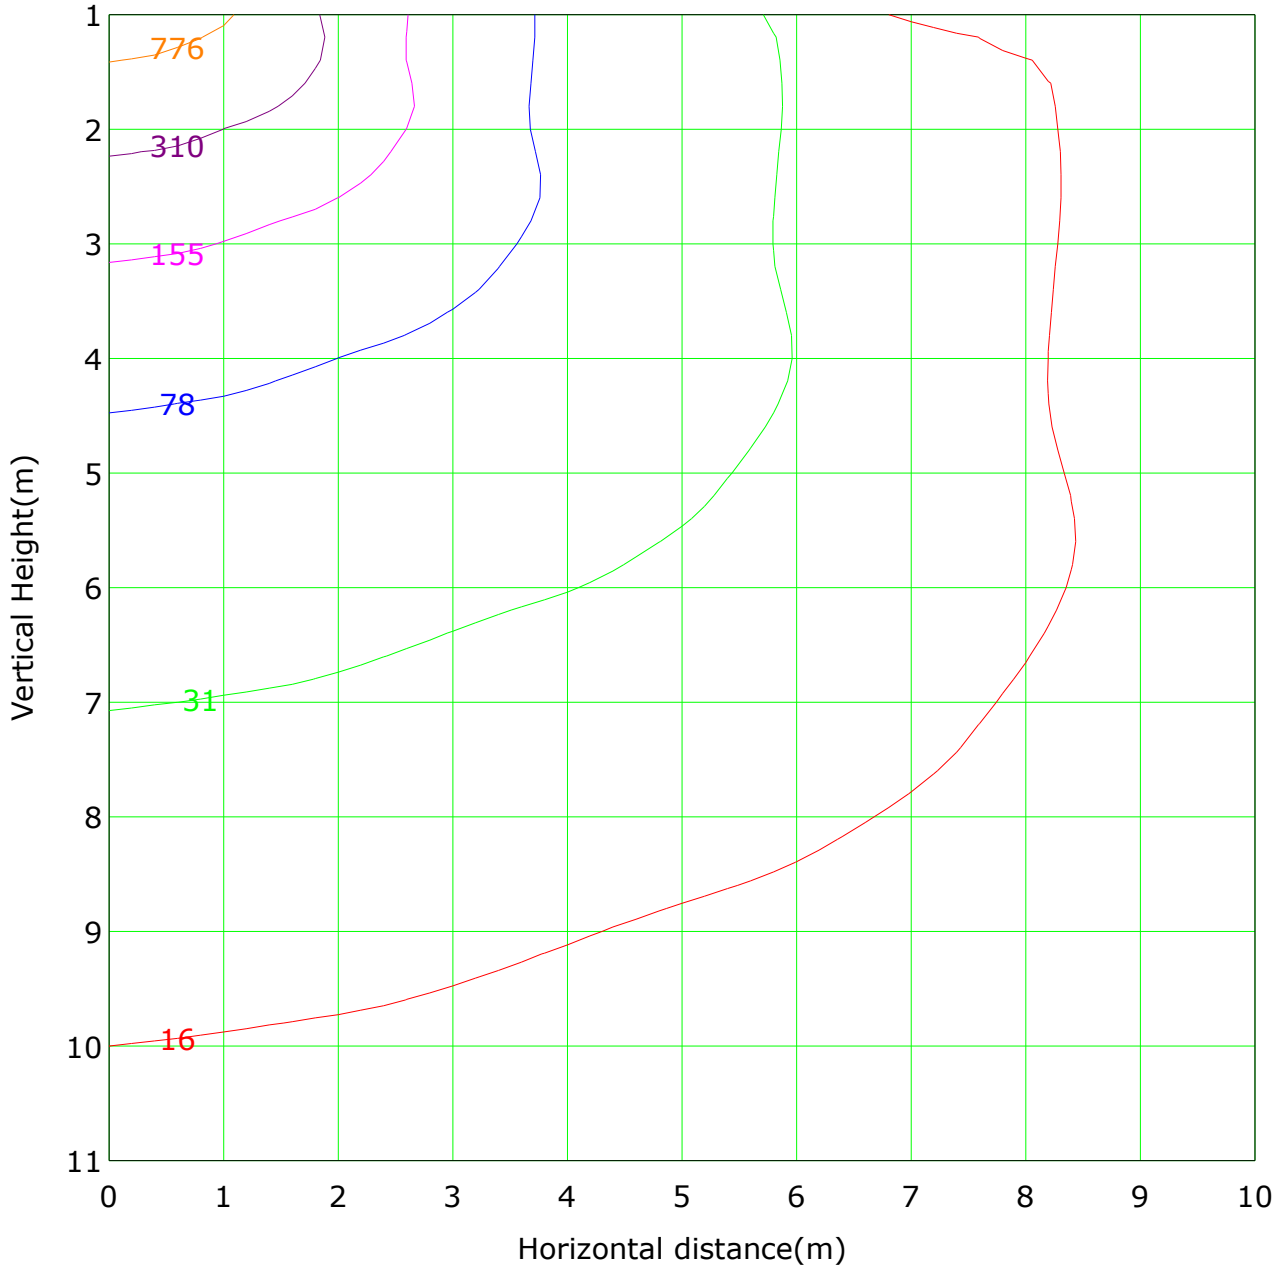

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 1551.2 lx
— (1%): 15.5 lx — (2%): 31.0 lx
— (5%): 77.6 lx — (10%): 155.1 lx
— (20%): 310.2 lx — (50%): 775.6 lx
— (100%):1551.2 lx

Tel:
Fax:

Area Flux Table

Unit: lm


		Vertical plane																			
		-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	
Flux(E)	Flux(T)	0.4	2.6	6.8	10.9	13.6	14.0	12.2	9.0	4.0	4.1	7.8	9.5	9.4	6.8	2.7	0.4	0.1	0.0	114.3105.2	
		1.1	7.2	13.3	17.3	19.4	20.9	21.4	16.2	9.9	10.1	16.1	19.0	18.4	17.8	15.2	8.0	0.9	0.0	232.1231.5	
		1.8	8.6	14.4	19.0	24.1	28.5	26.7	21.2	17.4	17.2	21.2	26.1	25.6	20.9	17.5	13.1	4.6	0.1	308.1307.9	
		2.2	9.1	15.1	21.7	29.8	32.5	30.3	27.0	25.2	24.6	26.5	30.2	31.2	26.3	19.3	14.0	7.3	0.3	372.7372.6	
		2.5	9.3	16.0	25.3	32.7	34.9	34.1	33.1	32.5	31.7	32.0	33.7	34.4	30.8	21.8	14.7	8.3	0.6	428.5428.4	
		2.6	9.5	17.1	27.7	34.6	36.9	37.8	38.5	38.6	37.7	37.0	36.8	36.8	33.3	24.6	15.4	8.8	1.0	474.6474.6	
		2.7	9.7	18.2	29.0	35.8	38.6	40.9	42.5	43.1	42.1	40.9	39.4	38.5	34.9	26.7	16.1	9.0	1.2	509.5509.5	
		2.8	9.8	19.0	29.8	36.5	39.9	43.0	45.1	46.0	45.1	43.5	41.3	39.6	35.9	27.9	16.6	9.1	1.2	532.0532.0	
		2.8	9.9	19.4	30.1	36.8	40.4	43.9	46.3	47.3	46.4	44.8	42.3	40.3	36.4	28.2	16.7	9.1	1.2	542.2542.2	
		2.8	9.8	19.0	29.9	36.9	40.4	43.7	46.1	47.1	46.1	44.7	42.4	40.7	36.4	27.9	16.5	9.0	1.1	540.8540.7	
		2.7	9.7	18.2	29.2	36.4	39.6	42.4	44.4	45.2	44.4	43.2	41.3	40.0	35.9	27.3	16.3	9.0	1.0	526.0526.0	
		2.6	9.5	17.3	28.2	35.3	38.2	40.0	41.2	41.7	41.0	40.2	39.2	38.7	34.7	25.9	15.8	8.8	0.8	499.2499.2	
		2.4	9.3	16.3	26.4	33.8	36.4	36.6	36.8	36.8	36.1	35.9	36.4	36.7	32.8	23.6	15.2	8.5	0.5	460.8460.7	
		2.2	9.1	15.5	23.6	31.6	34.2	32.8	31.2	30.5	29.9	30.8	33.2	34.0	30.0	20.9	14.5	7.7	0.2	411.9411.8	
		1.7	8.7	14.7	20.3	27.8	31.2	29.1	25.2	23.1	22.9	25.3	29.4	30.4	24.9	18.8	13.8	6.0	0.1	353.6353.5	
		1.1	7.9	14.0	18.3	21.8	26.2	25.5	19.9	15.5	15.5	20.0	25.1	23.9	20.1	17.1	12.2	2.5	0.0	286.7286.4	
		0.4	4.9	12.1	16.6	18.6	18.8	18.7	15.1	8.6	8.5	14.5	17.0	17.3	16.9	12.6	4.2	0.2	0.0	205.1203.4	
		0.1	0.7	3.1	6.5	9.2	10.2	9.1	6.6	3.0	2.6	5.3	6.6	5.9	3.2	0.6	0.1	0.0	0.0	73.0	63.4
Flux(E)	Flux(T)	34.0	144.9269.0	409.3514.0	561.4567.9	544.1511.1	501.3528.0	548.1541.3	477.0357.9	222.9107.8	8.6										6849

Horizontal plane

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

The Average Illuminance Effective Figure

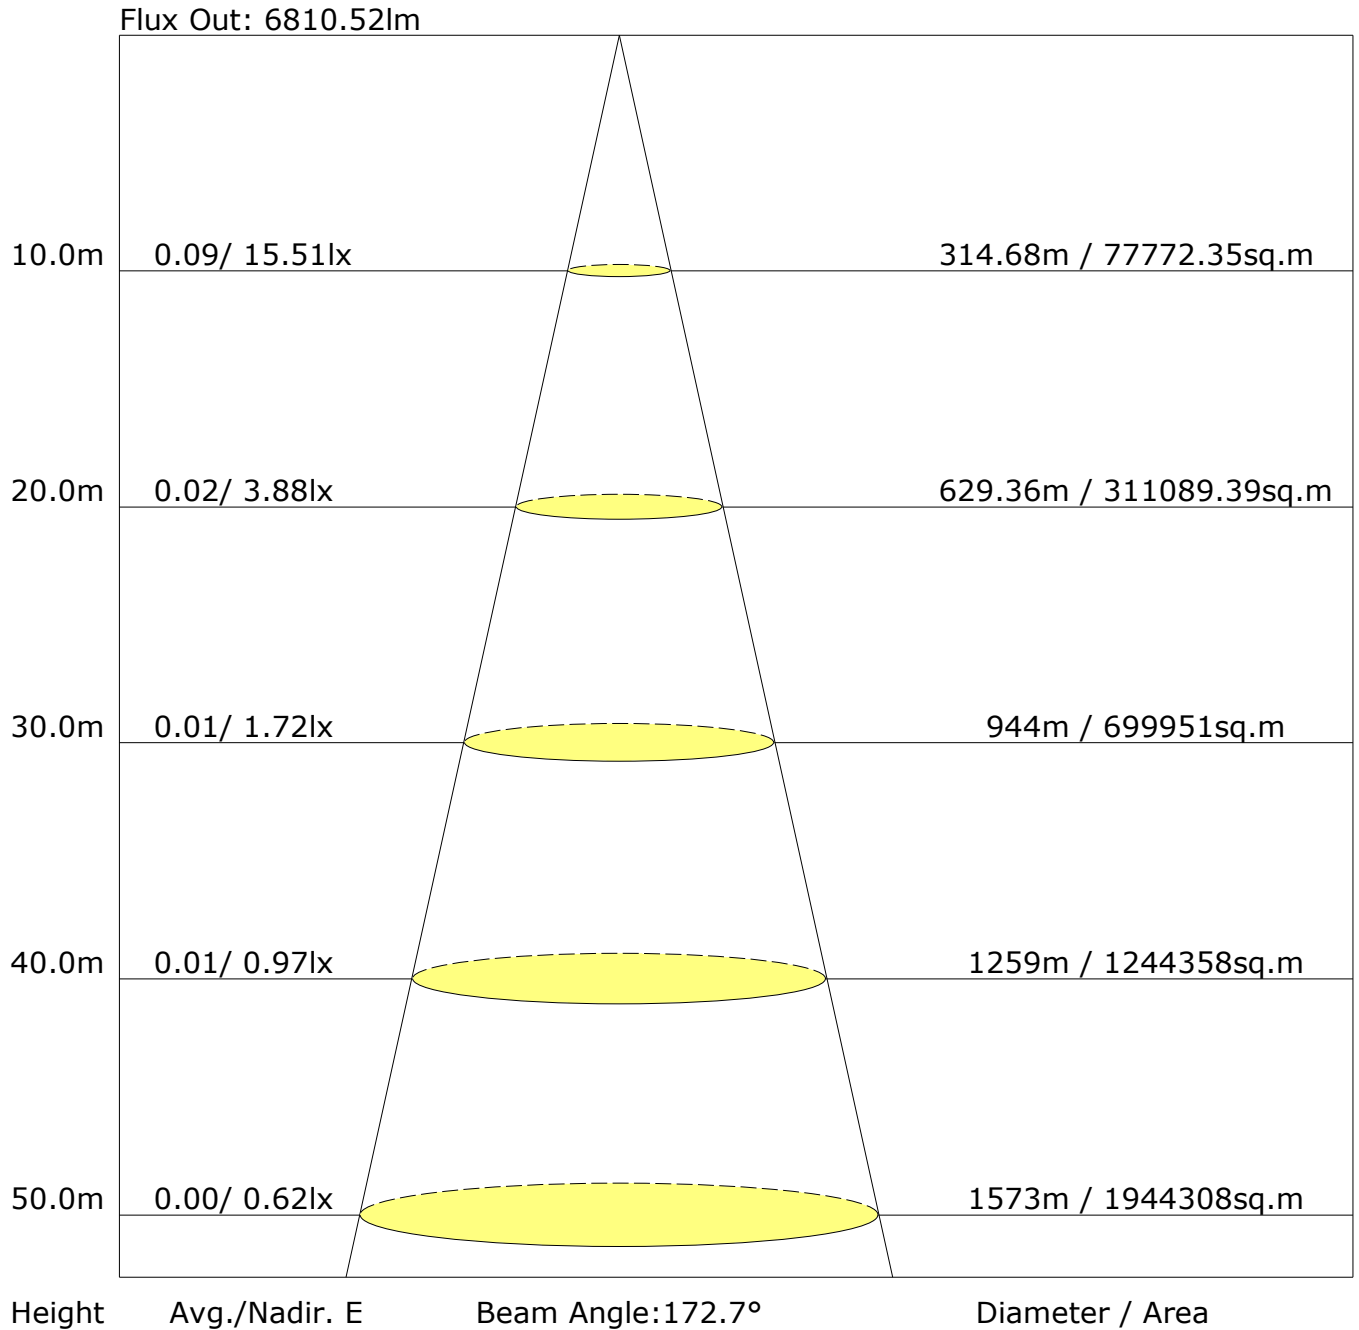

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	18.2	20.0	18.5	20.3	20.6	12.7	14.5	13.1	14.8	15.2
3H	20.6	22.3	21.0	22.7	23.0	14.1	15.7	14.4	16.1	16.4
4H	22.1	23.7	22.5	24.0	24.4	14.5	16.1	14.9	16.4	16.8
6H	23.7	25.2	24.1	25.6	26.0	14.7	16.2	15.1	16.6	17.0
8H	24.3	25.7	24.7	26.1	26.5	14.7	16.2	15.2	16.6	17.0
12H	24.3	25.7	24.7	26.1	26.5	14.7	16.1	15.2	16.5	17.0
X=4H Y=2H	18.6	20.2	19.0	20.6	21.0	15.0	16.6	15.4	16.9	17.3
3H	21.3	22.7	21.7	23.1	23.5	16.9	18.3	17.3	18.7	19.1
4H	22.9	24.2	23.4	24.6	25.1	17.6	18.9	18.0	19.3	19.7
6H	24.8	25.9	25.2	26.3	26.8	18.1	19.2	18.5	19.6	20.1
8H	25.4	26.5	25.9	26.9	27.4	18.2	19.2	18.6	19.7	20.1
12H	25.5	26.5	26.0	26.9	27.4	18.2	19.2	18.7	19.7	20.1
X=8H Y=4H	23.2	24.2	23.6	24.7	25.2	18.8	19.9	19.3	20.3	20.8
6H	25.2	26.1	25.7	26.6	27.1	19.5	20.5	20.1	21.0	21.5
8H	25.9	26.7	26.4	27.2	27.7	19.8	20.6	20.3	21.1	21.6
12H	26.0	26.8	26.6	27.3	27.8	19.9	20.7	20.5	21.2	21.7
X=12H Y=4H	23.2	24.2	23.7	24.7	25.1	19.2	20.2	19.7	20.7	21.2
6H	25.3	26.1	25.8	26.5	27.1	20.2	21.0	20.7	21.5	22.0
8H	26.0	26.8	26.5	27.3	27.8	20.5	21.3	21.0	21.8	22.3

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

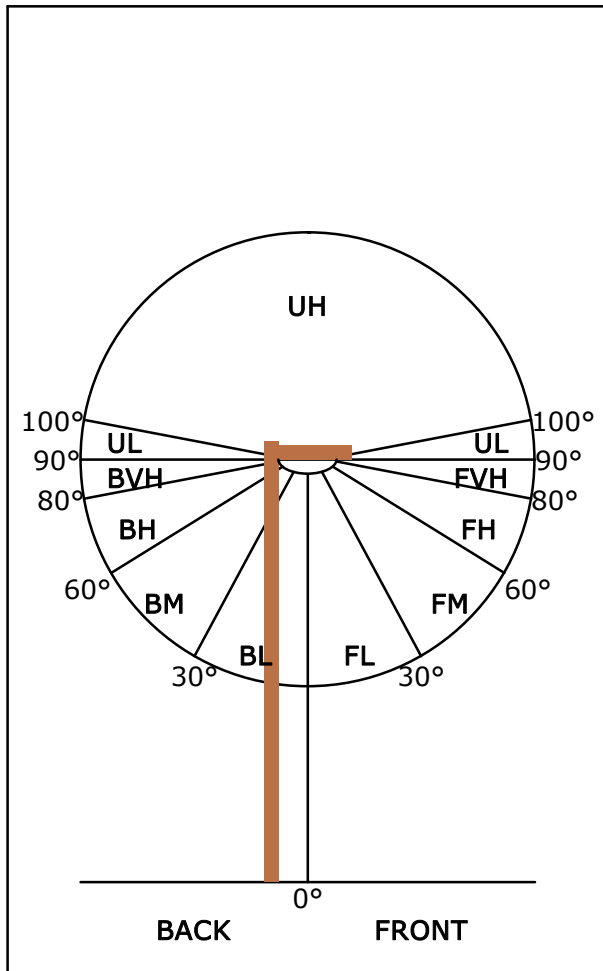


ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	3357	48.5
FL (0°-30°)	627	9.1
FM (30°-60°)	1548	22.4
FH (60°-80°)	980	14.2
FVH (80°-90°)	202	2.9
BACK LIGHT	3514	50.8
BL (0°-30°)	634	9.2
BM (30°-60°)	1581	22.8
BH (60°-80°)	1032	14.9
BVH (80°-90°)	267	3.9
UP LIGHT	50	0.7
UL (90°-100°)	6	0.1
UH (100°-180°)	45	0.6
TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B3 U5 G3
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B3 U5 G2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

LCS Graph

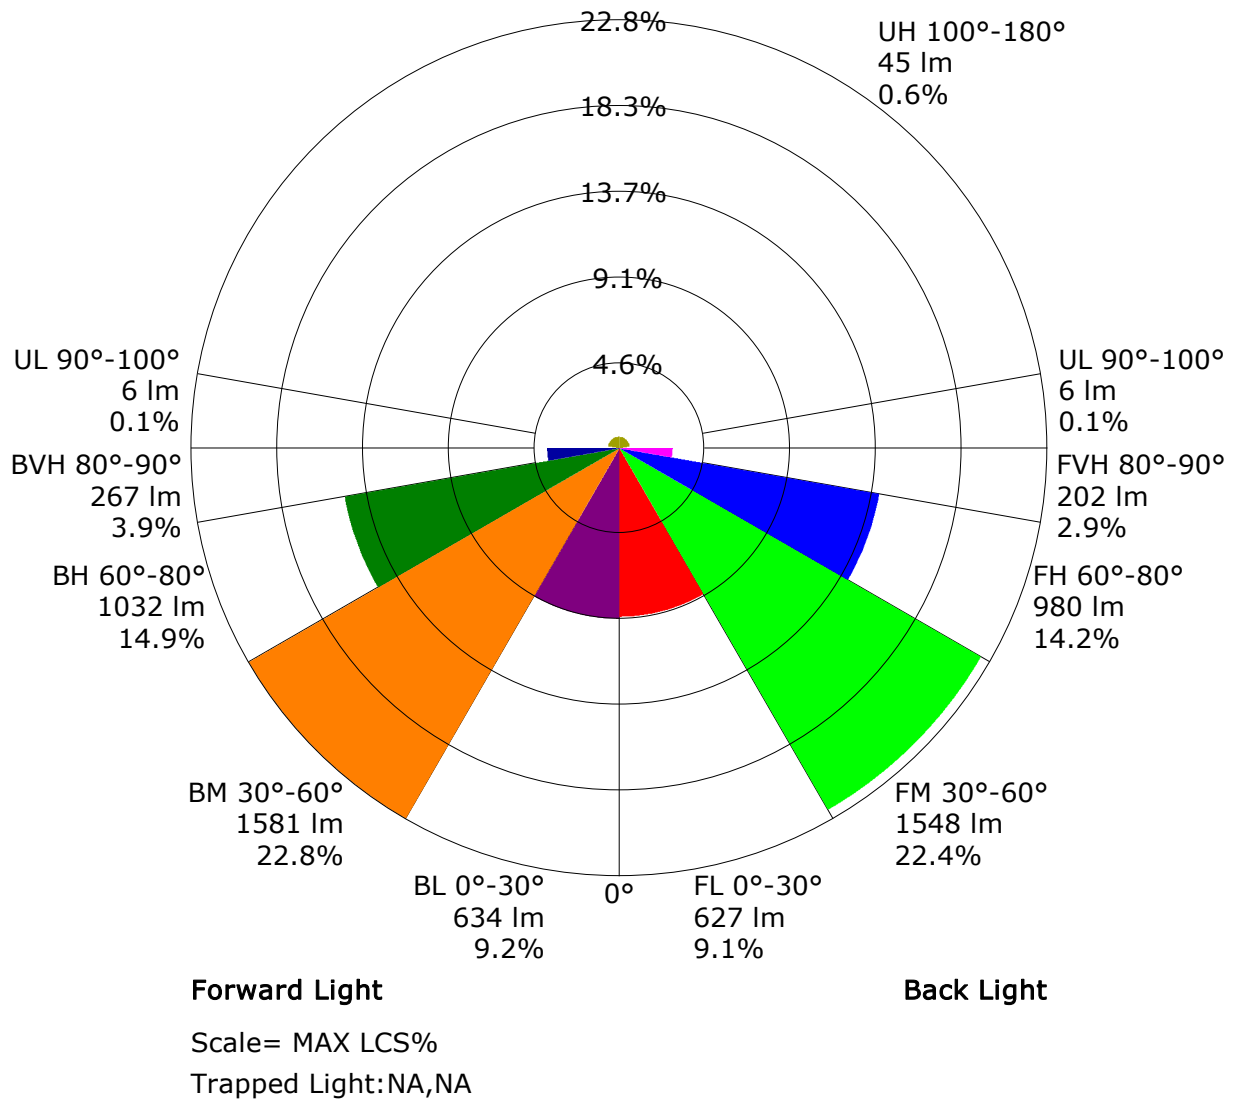

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 1.50								
Room Reflectance			Room Index(RI)								
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.49	0.58	0.66	0.71	0.79	0.85	0.89	0.94	0.98
	0.30		0.41	0.49	0.57	0.63	0.71	0.78	0.82	0.89	0.93
	0.20		0.34	0.42	0.50	0.56	0.65	0.72	0.77	0.84	0.89
0.50	0.50	0.20	0.48	0.55	0.63	0.68	0.76	0.81	0.85	0.90	0.94
	0.30		0.40	0.47	0.55	0.61	0.69	0.75	0.79	0.85	0.90
	0.20		0.34	0.41	0.49	0.55	0.63	0.70	0.75	0.81	0.86
0.30	0.50	0.20	0.46	0.53	0.60	0.65	0.73	0.78	0.81	0.86	0.90
	0.30		0.39	0.46	0.54	0.59	0.67	0.72	0.77	0.82	0.86
	0.20		0.34	0.41	0.48	0.54	0.62	0.68	0.72	0.79	0.83
0.00	0.00	0.00	0.31	0.38	0.45	0.50	0.58	0.64	0.68	0.74	0.78
<p>Rating:48W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980</p>											

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 1.50									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	1.11	0.97	0.84	0.74	0.61	0.52	0.45	0.36	0.30	
	0.30		0.93	0.83	0.73	0.66	0.55	0.48	0.42	0.34	0.29	
	0.20		0.80	0.72	0.65	0.59	0.50	0.44	0.39	0.32	0.27	
0.50	0.50	0.20	1.07	0.93	0.81	0.72	0.59	0.53	0.43	0.35	0.29	
	0.30		0.91	0.81	0.71	0.64	0.54	0.46	0.41	0.33	0.28	
	0.20		0.79	0.72	0.64	0.58	0.50	0.43	0.38	0.31	0.26	
0.30	0.50	0.20	1.04	0.90	0.78	0.69	0.57	0.48	0.42	0.33	0.28	
	0.30		0.89	0.79	0.70	0.63	0.52	0.45	0.39	0.32	0.27	
	0.20		0.78	0.71	0.63	0.57	0.49	0.42	0.37	0.31	0.26	
0.00	0.00	0.00	0.69	0.62	0.55	0.49	0.42	0.36	0.32	0.26	0.22	
<p>Rating:48W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980</p>												

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 1.50								
Room Reflectance			Room Index(RI)								
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.18	0.20	0.21	0.21	0.22	0.22	0.23	0.23	0.23
	0.30		0.10	0.12	0.13	0.14	0.16	0.17	0.18	0.19	0.20
	0.20		0.05	0.06	0.08	0.09	0.11	0.12	0.14	0.15	0.17
0.50	0.50	0.20	0.17	0.19	0.20	0.20	0.21	0.22	0.22	0.22	0.22
	0.30		0.10	0.12	0.13	0.14	0.15	0.16	0.17	0.18	0.19
	0.20		0.05	0.06	0.08	0.09	0.11	0.12	0.13	0.15	0.16
0.30	0.50	0.20	0.17	0.18	0.19	0.20	0.20	0.21	0.21	0.21	0.21
	0.30		0.10	0.11	0.13	0.14	0.15	0.16	0.17	0.18	0.18
	0.20		0.05	0.06	0.07	0.09	0.10	0.12	0.13	0.14	0.16
0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
<p>Rating:48W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980</p>											

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	1553.1	1.5	1.5	0.02	0.02
1.0-2.0	1552.7	4.5	5.9	0.06	0.09
2.0-3.0	1551.9	7.4	13.4	0.11	0.19
3.0-4.0	1550.8	10.4	23.7	0.15	0.34
4.0-5.0	1549.4	13.3	37.1	0.19	0.54
5.0-6.0	1547.8	16.3	53.3	0.24	0.77
6.0-7.0	1545.9	19.2	72.5	0.28	1.05
7.0-8.0	1543.9	22.1	94.6	0.32	1.37
8.0-9.0	1541.7	25.0	119.6	0.36	1.73
9.0-10.0	1539.2	27.9	147.5	0.40	2.13
10.0-11.0	1536.7	30.7	178.2	0.44	2.57
11.0-12.0	1534.0	33.5	211.7	0.48	3.06
12.0-13.0	1531.1	36.3	248.1	0.53	3.58
13.0-14.0	1528.0	39.1	287.2	0.57	4.15
14.0-15.0	1524.8	41.9	329.1	0.60	4.75
15.0-16.0	1521.3	44.6	373.6	0.64	5.40
16.0-17.0	1517.5	47.3	420.9	0.68	6.08
17.0-18.0	1513.5	49.9	470.8	0.72	6.80
18.0-19.0	1509.3	52.5	523.3	0.76	7.56
19.0-20.0	1504.9	55.1	578.4	0.80	8.36
20.0-21.0	1500.3	57.6	636.0	0.83	9.19
21.0-22.0	1495.5	60.1	696.1	0.87	10.06
22.0-23.0	1490.5	62.6	758.7	0.90	10.96
23.0-24.0	1485.4	65.0	823.6	0.94	11.90
24.0-25.0	1480.1	67.3	891.0	0.97	12.87
25.0-26.0	1474.7	69.6	960.6	1.01	13.88
26.0-27.0	1469.3	71.9	1032.5	1.04	14.92
27.0-28.0	1463.9	74.1	1106.6	1.07	15.99
28.0-29.0	1458.6	76.3	1182.9	1.10	17.09
29.0-30.0	1453.4	78.5	1261.4	1.13	18.22
30.0-31.0	1448.3	80.6	1342.0	1.16	19.39
31.0-32.0	1443.4	82.7	1424.7	1.19	20.58
32.0-33.0	1438.6	84.8	1509.5	1.22	21.81
33.0-34.0	1433.9	86.8	1596.3	1.25	23.06
34.0-35.0	1429.3	88.8	1685.0	1.28	24.34
35.0-36.0	1424.7	90.7	1775.8	1.31	25.65

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	1420.2	92.6	1868.4	1.34	26.99
37.0-38.0	1415.8	94.5	1962.9	1.37	28.36
38.0-39.0	1411.3	96.3	2059.3	1.39	29.75
39.0-40.0	1406.9	98.1	2157.4	1.42	31.17
40.0-41.0	1402.6	99.9	2257.3	1.44	32.61
41.0-42.0	1398.4	101.6	2358.9	1.47	34.08
42.0-43.0	1394.2	103.3	2462.2	1.49	35.57
43.0-44.0	1389.9	104.9	2567.1	1.52	37.09
44.0-45.0	1385.2	106.5	2673.6	1.54	38.62
45.0-46.0	1380.1	107.9	2781.5	1.56	40.18
46.0-47.0	1374.3	109.3	2890.9	1.58	41.76
47.0-48.0	1368.0	110.6	3001.5	1.60	43.36
48.0-49.0	1361.4	111.8	3113.3	1.62	44.98
49.0-50.0	1354.5	113.0	3226.2	1.63	46.61
50.0-51.0	1347.1	114.0	3340.2	1.65	48.25
51.0-52.0	1338.9	114.9	3455.1	1.66	49.91
52.0-53.0	1329.8	115.7	3570.8	1.67	51.59
53.0-54.0	1319.9	116.4	3687.2	1.68	53.27
54.0-55.0	1309.3	116.9	3804.1	1.69	54.96
55.0-56.0	1297.7	117.3	3921.3	1.69	56.65
56.0-57.0	1285.1	117.5	4038.9	1.70	58.35
57.0-58.0	1271.0	117.5	4156.4	1.70	60.05
58.0-59.0	1254.9	117.3	4273.7	1.70	61.74
59.0-60.0	1236.6	116.8	4390.6	1.69	63.43
60.0-61.0	1216.4	116.1	4506.7	1.68	65.11
61.0-62.0	1194.4	115.1	4621.8	1.66	66.77
62.0-63.0	1170.9	113.9	4735.7	1.65	68.41
63.0-64.0	1146.3	112.5	4848.2	1.63	70.04
64.0-65.0	1120.4	110.9	4959.1	1.60	71.64
65.0-66.0	1093.6	109.1	5068.2	1.58	73.22
66.0-67.0	1066.3	107.2	5175.4	1.55	74.77
67.0-68.0	1039.3	105.3	5280.7	1.52	76.29
68.0-69.0	1013.1	103.4	5384.1	1.49	77.78
69.0-70.0	987.9	101.5	5485.6	1.47	79.25
70.0-71.0	963.7	99.6	5585.2	1.44	80.69
71.0-72.0	940.4	97.8	5683.0	1.41	82.10

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	917.9	96.0	5779.0	1.39	83.49
73.0-74.0	896.0	94.2	5873.2	1.36	84.85
74.0-75.0	874.9	92.4	5965.7	1.34	86.18
75.0-76.0	854.6	90.7	6056.4	1.31	87.49
76.0-77.0	835.0	89.0	6145.4	1.29	88.78
77.0-78.0	815.4	87.3	6232.7	1.26	90.04
78.0-79.0	795.9	85.5	6318.3	1.24	91.28
79.0-80.0	776.3	83.7	6402.0	1.21	92.49
80.0-81.0	753.0	81.4	6483.4	1.18	93.66
81.0-82.0	717.2	77.8	6561.2	1.12	94.79
82.0-83.0	660.5	71.8	6633.0	1.04	95.82
83.0-84.0	585.5	63.8	6696.8	0.92	96.75
84.0-85.0	501.4	54.7	6751.5	0.79	97.54
85.0-86.0	413.3	45.2	6796.7	0.65	98.19
86.0-87.0	316.1	34.6	6831.3	0.50	98.69
87.0-88.0	209.2	22.9	6854.2	0.33	99.02
88.0-89.0	112.6	12.3	6866.6	0.18	99.20
89.0-90.0	46.2	5.1	6871.6	0.07	99.27
90.0-91.0	13.4	1.5	6873.1	0.02	99.29
91.0-92.0	4.7	0.5	6873.6	0.01	99.30
92.0-93.0	4.0	0.4	6874.1	0.01	99.31
93.0-94.0	3.8	0.4	6874.5	0.01	99.31
94.0-95.0	3.8	0.4	6874.9	0.01	99.32
95.0-96.0	4.0	0.4	6875.3	0.01	99.32
96.0-97.0	4.2	0.5	6875.8	0.01	99.33
97.0-98.0	4.4	0.5	6876.3	0.01	99.34
98.0-99.0	4.6	0.5	6876.8	0.01	99.35
99.0-100.0	4.8	0.5	6877.3	0.01	99.35
100.0-101.0	4.9	0.5	6877.8	0.01	99.36
101.0-102.0	5.1	0.6	6878.4	0.01	99.37
102.0-103.0	5.3	0.6	6878.9	0.01	99.38
103.0-104.0	5.5	0.6	6879.5	0.01	99.39
104.0-105.0	5.7	0.6	6880.1	0.01	99.39
105.0-106.0	5.9	0.6	6880.7	0.01	99.40
106.0-107.0	6.0	0.6	6881.4	0.01	99.41
107.0-108.0	6.2	0.7	6882.0	0.01	99.42

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	6.4	0.7	6882.7	0.01	99.43
109.0-110.0	6.6	0.7	6883.4	0.01	99.44
110.0-111.0	6.8	0.7	6884.1	0.01	99.45
111.0-112.0	7.0	0.7	6884.8	0.01	99.46
112.0-113.0	7.1	0.7	6885.5	0.01	99.47
113.0-114.0	7.3	0.7	6886.2	0.01	99.48
114.0-115.0	7.4	0.7	6887.0	0.01	99.49
115.0-116.0	7.6	0.8	6887.7	0.01	99.50
116.0-117.0	7.8	0.8	6888.5	0.01	99.51
117.0-118.0	7.9	0.8	6889.3	0.01	99.53
118.0-119.0	8.1	0.8	6890.0	0.01	99.54
119.0-120.0	8.2	0.8	6890.8	0.01	99.55
120.0-121.0	8.4	0.8	6891.6	0.01	99.56
121.0-122.0	8.5	0.8	6892.4	0.01	99.57
122.0-123.0	8.7	0.8	6893.2	0.01	99.58
123.0-124.0	8.8	0.8	6894.0	0.01	99.59
124.0-125.0	8.9	0.8	6894.8	0.01	99.61
125.0-126.0	9.0	0.8	6895.6	0.01	99.62
126.0-127.0	9.1	0.8	6896.4	0.01	99.63
127.0-128.0	9.2	0.8	6897.2	0.01	99.64
128.0-129.0	9.3	0.8	6898.0	0.01	99.65
129.0-130.0	9.4	0.8	6898.8	0.01	99.66
130.0-131.0	9.4	0.8	6899.6	0.01	99.68
131.0-132.0	9.5	0.8	6900.4	0.01	99.69
132.0-133.0	9.6	0.8	6901.2	0.01	99.70
133.0-134.0	9.7	0.8	6901.9	0.01	99.71
134.0-135.0	9.7	0.8	6902.7	0.01	99.72
135.0-136.0	9.8	0.8	6903.4	0.01	99.73
136.0-137.0	9.9	0.7	6904.2	0.01	99.74
137.0-138.0	9.9	0.7	6904.9	0.01	99.75
138.0-139.0	10.0	0.7	6905.6	0.01	99.76
139.0-140.0	10.1	0.7	6906.4	0.01	99.77
140.0-141.0	10.1	0.7	6907.1	0.01	99.78
141.0-142.0	10.2	0.7	6907.8	0.01	99.79
142.0-143.0	10.2	0.7	6908.4	0.01	99.80
143.0-144.0	10.3	0.7	6909.1	0.01	99.81

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	10.3	0.7	6909.8	0.01	99.82
145.0-146.0	10.4	0.6	6910.4	0.01	99.83
146.0-147.0	10.4	0.6	6911.1	0.01	99.84
147.0-148.0	10.5	0.6	6911.7	0.01	99.85
148.0-149.0	10.5	0.6	6912.3	0.01	99.86
149.0-150.0	10.6	0.6	6912.9	0.01	99.87
150.0-151.0	10.6	0.6	6913.4	0.01	99.88
151.0-152.0	10.6	0.6	6914.0	0.01	99.88
152.0-153.0	10.7	0.5	6914.5	0.01	99.89
153.0-154.0	10.7	0.5	6915.1	0.01	99.90
154.0-155.0	10.7	0.5	6915.6	0.01	99.91
155.0-156.0	10.8	0.5	6916.0	0.01	99.91
156.0-157.0	10.8	0.5	6916.5	0.01	99.92
157.0-158.0	10.8	0.5	6917.0	0.01	99.93
158.0-159.0	10.9	0.4	6917.4	0.01	99.93
159.0-160.0	10.9	0.4	6917.8	0.01	99.94
160.0-161.0	10.9	0.4	6918.2	0.01	99.94
161.0-162.0	11.0	0.4	6918.6	0.01	99.95
162.0-163.0	11.0	0.4	6919.0	0.01	99.96
163.0-164.0	11.0	0.3	6919.3	0.00	99.96
164.0-165.0	11.1	0.3	6919.6	0.00	99.96
165.0-166.0	11.1	0.3	6919.9	0.00	99.97
166.0-167.0	11.2	0.3	6920.2	0.00	99.97
167.0-168.0	11.2	0.3	6920.5	0.00	99.98
168.0-169.0	11.3	0.2	6920.7	0.00	99.98
169.0-170.0	11.3	0.2	6921.0	0.00	99.98
170.0-171.0	11.4	0.2	6921.2	0.00	99.99
171.0-172.0	11.4	0.2	6921.4	0.00	99.99
172.0-173.0	11.5	0.2	6921.5	0.00	99.99
173.0-174.0	11.5	0.1	6921.7	0.00	99.99
174.0-175.0	11.5	0.1	6921.8	0.00	100.00
175.0-176.0	11.6	0.1	6921.9	0.00	100.00
176.0-177.0	11.6	0.1	6922.0	0.00	100.00
177.0-178.0	11.6	0.1	6922.0	0.00	100.00
178.0-179.0	11.6	0.0	6922.1	0.00	100.00
179.0-180.0	11.6	0.0	6922.1	0.00	100.00

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	1551.2	1550.7	1549.7	1549.3	1548.9	1549.0	1548.8	1549.3	1549.0	1550.2
G1.0	1546.8	1546.2	1545.1	1544.5	1544.7	1544.7	1544.7	1545.4	1545.0	1546.2
G2.0	1542.1	1541.7	1540.5	1540.2	1540.4	1540.2	1540.3	1540.9	1541.1	1542.3
G3.0	1537.8	1537.3	1536.1	1535.9	1536.1	1536.1	1536.1	1536.5	1536.5	1538.1
G4.0	1534.1	1533.6	1532.6	1532.2	1532.0	1532.2	1532.0	1532.8	1532.2	1533.8
G5.0	1531.4	1530.6	1529.6	1529.1	1528.9	1528.7	1528.3	1528.6	1528.4	1529.6
G6.0	1528.7	1528.4	1527.3	1526.4	1526.0	1525.4	1524.9	1525.1	1524.4	1525.5
G7.0	1527.1	1526.6	1525.6	1524.6	1523.8	1522.9	1522.2	1521.5	1520.5	1521.3
G8.0	1526.3	1525.7	1524.5	1523.1	1522.0	1521.0	1519.8	1518.1	1517.0	1517.0
G9.0	1525.9	1525.3	1524.0	1522.4	1521.2	1519.4	1517.5	1515.7	1513.8	1513.0
G10.0	1526.8	1526.1	1524.3	1522.7	1520.7	1518.2	1515.7	1513.3	1510.4	1509.2
G11.0	1528.2	1527.9	1525.8	1523.5	1521.0	1517.8	1514.7	1511.4	1507.6	1505.3
G12.0	1530.2	1529.6	1527.6	1525.0	1521.9	1518.2	1513.9	1510.0	1504.8	1502.0
G13.0	1532.1	1531.2	1529.0	1526.4	1522.9	1518.9	1513.9	1509.0	1502.7	1498.1
G14.0	1533.1	1532.3	1530.0	1527.6	1523.5	1519.4	1513.8	1507.7	1500.9	1495.1
G15.0	1533.5	1532.8	1530.8	1527.8	1523.9	1519.2	1513.4	1507.0	1499.2	1491.8
G16.0	1533.6	1532.9	1530.8	1528.0	1523.7	1518.6	1512.6	1505.4	1497.5	1489.0
G17.0	1533.5	1532.8	1530.3	1527.4	1523.0	1517.8	1511.3	1503.7	1495.4	1486.3
G18.0	1533.2	1532.5	1529.9	1526.8	1522.1	1516.3	1509.5	1501.6	1492.5	1483.2
G19.0	1532.8	1532.2	1529.6	1526.0	1520.9	1514.8	1507.5	1499.1	1489.6	1479.7
G20.0	1533.0	1532.4	1530.0	1525.3	1519.7	1512.9	1504.8	1496.0	1486.3	1475.5
G21.0	1533.2	1532.9	1529.8	1525.2	1518.6	1511.2	1502.3	1492.4	1482.3	1470.9
G22.0	1534.0	1533.6	1530.6	1525.2	1517.8	1509.6	1499.7	1489.3	1477.7	1466.2
G23.0	1535.8	1534.9	1530.5	1525.5	1517.5	1508.2	1497.5	1485.8	1473.2	1460.7
G24.0	1538.3	1536.9	1532.7	1526.8	1517.5	1506.9	1495.0	1482.4	1468.7	1454.6
G25.0	1541.5	1540.3	1535.4	1528.3	1518.1	1506.2	1493.1	1478.7	1464.1	1448.7
G26.0	1545.8	1544.5	1539.1	1530.8	1519.6	1506.4	1491.4	1475.6	1459.2	1442.8
G27.0	1552.0	1550.3	1544.8	1534.9	1522.0	1507.4	1490.3	1472.5	1454.7	1436.5
G28.0	1560.2	1557.7	1551.7	1540.8	1525.8	1509.1	1490.0	1470.3	1450.0	1430.3
G29.0	1569.2	1567.0	1560.0	1548.0	1531.2	1512.1	1490.4	1468.3	1446.0	1424.4
G30.0	1580.4	1578.0	1570.2	1557.1	1538.2	1516.8	1492.3	1467.1	1442.5	1418.5
G31.0	1592.9	1589.8	1580.7	1567.0	1546.2	1522.3	1495.5	1466.9	1439.4	1413.1
G32.0	1606.9	1603.5	1594.2	1578.5	1555.9	1529.4	1499.4	1468.0	1436.8	1407.2
G33.0	1620.8	1616.8	1607.7	1590.7	1566.9	1537.7	1504.6	1470.0	1435.6	1402.4
G34.0	1633.8	1630.4	1621.2	1603.4	1578.9	1547.6	1511.5	1472.7	1435.3	1398.8
G35.0	1645.8	1642.8	1632.8	1616.0	1590.8	1558.3	1519.3	1476.9	1435.8	1395.3
G36.0	1656.6	1653.8	1644.2	1627.4	1601.7	1568.9	1528.2	1482.4	1437.1	1393.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	1665.2	1662.7	1653.2	1636.6	1611.2	1578.3	1536.9	1489.4	1439.7	1391.6
G38.0	1671.8	1669.1	1660.7	1644.3	1619.0	1586.5	1545.7	1497.3	1443.5	1390.4
G39.0	1678.1	1675.2	1665.5	1649.5	1625.1	1593.1	1553.1	1504.4	1448.7	1390.5
G40.0	1686.1	1683.2	1672.6	1654.8	1629.7	1598.4	1559.1	1511.2	1454.8	1392.3
G41.0	1693.8	1690.7	1680.1	1661.5	1634.4	1601.5	1563.5	1517.1	1460.1	1394.5
G42.0	1700.8	1697.9	1687.3	1668.3	1640.6	1605.1	1566.1	1521.1	1465.1	1398.9
G43.0	1706.2	1703.4	1693.0	1674.5	1645.8	1609.8	1568.0	1523.9	1469.0	1402.5
G44.0	1709.1	1706.7	1697.1	1679.0	1651.1	1614.4	1571.6	1524.1	1471.2	1405.3
G45.0	1707.6	1705.6	1697.3	1681.3	1654.6	1619.2	1575.4	1525.1	1471.8	1407.7
G46.0	1701.4	1700.2	1693.3	1679.1	1655.4	1622.5	1579.1	1527.2	1470.3	1408.1
G47.0	1694.7	1692.7	1685.6	1672.9	1652.2	1622.8	1581.7	1529.0	1468.9	1407.7
G48.0	1689.9	1687.3	1679.7	1665.1	1644.6	1618.4	1582.3	1531.3	1469.2	1404.9
G49.0	1685.1	1683.1	1674.9	1660.0	1636.7	1610.1	1578.4	1531.7	1469.4	1400.6
G50.0	1681.3	1679.2	1671.1	1654.6	1630.4	1601.3	1570.6	1529.2	1470.1	1398.1
G51.0	1675.2	1673.6	1665.6	1649.9	1624.6	1594.2	1560.7	1522.1	1468.9	1396.8
G52.0	1669.3	1668.0	1659.9	1643.4	1619.0	1587.3	1552.0	1512.3	1464.1	1395.9
G53.0	1659.2	1659.2	1651.8	1637.4	1611.7	1580.7	1543.8	1501.7	1455.4	1393.7
G54.0	1646.7	1647.4	1640.6	1627.1	1604.2	1572.3	1535.8	1492.1	1444.2	1387.8
G55.0	1629.3	1631.1	1625.5	1613.5	1592.7	1563.8	1526.6	1483.7	1433.0	1379.0
G56.0	1606.1	1608.8	1605.4	1596.5	1578.2	1552.3	1518.8	1473.7	1422.4	1367.0
G57.0	1570.3	1575.8	1574.4	1571.1	1558.1	1537.0	1507.4	1464.3	1412.7	1355.4
G58.0	1523.9	1529.7	1533.3	1533.8	1529.4	1517.3	1493.9	1454.3	1401.7	1343.9
G59.0	1468.4	1475.6	1481.1	1485.3	1488.1	1487.7	1474.6	1442.8	1391.5	1332.9
G60.0	1415.5	1419.5	1422.4	1429.0	1437.5	1446.0	1446.5	1426.1	1380.4	1320.0
G61.0	1370.2	1374.0	1371.3	1372.5	1377.3	1390.6	1404.1	1402.6	1366.0	1308.8
G62.0	1338.0	1337.9	1333.7	1329.7	1325.7	1330.8	1349.8	1365.5	1346.5	1297.1
G63.0	1311.5	1310.5	1304.3	1296.3	1285.7	1276.8	1286.2	1314.7	1315.5	1282.0
G64.0	1290.1	1289.5	1281.2	1270.7	1256.0	1240.6	1231.8	1248.3	1271.4	1259.3
G65.0	1271.6	1270.1	1261.7	1249.1	1231.8	1211.4	1192.7	1186.4	1208.2	1224.6
G66.0	1255.5	1253.4	1244.2	1231.1	1212.3	1188.8	1164.5	1143.7	1140.7	1173.3
G67.0	1240.2	1238.4	1228.3	1214.1	1194.3	1169.0	1140.8	1113.3	1088.3	1101.6
G68.0	1226.9	1223.6	1214.3	1199.4	1178.3	1151.8	1121.1	1087.3	1050.7	1030.7
G69.0	1214.2	1211.6	1201.0	1185.8	1163.2	1135.8	1103.6	1067.3	1021.8	985.7
G70.0	1203.5	1200.0	1189.1	1173.0	1150.6	1121.8	1087.6	1048.5	998.3	955.2
G71.0	1193.7	1189.9	1178.2	1161.9	1138.5	1107.8	1072.4	1031.8	977.9	931.2
G72.0	1183.4	1178.7	1167.5	1151.8	1128.0	1096.4	1059.6	1014.6	960.1	910.2
G73.0	1171.8	1167.0	1155.4	1141.0	1117.5	1085.9	1047.4	998.3	943.8	892.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	1159.5	1154.8	1142.8	1129.8	1106.8	1074.4	1035.8	983.4	929.3	875.5
G75.0	1146.3	1142.3	1130.5	1117.5	1094.9	1061.5	1023.0	970.3	915.8	859.8
G76.0	1132.7	1129.5	1118.4	1105.8	1082.5	1047.0	1008.8	955.7	903.5	845.3
G77.0	1117.7	1116.7	1105.6	1092.6	1068.3	1031.2	989.6	939.1	887.7	830.2
G78.0	1103.1	1103.8	1093.2	1079.1	1052.9	1014.7	969.9	920.7	870.3	813.9
G79.0	1087.5	1090.3	1079.8	1065.3	1036.2	996.3	948.6	902.4	851.2	796.7
G80.0	1056.4	1065.5	1056.0	1042.8	1015.1	977.6	928.4	882.8	833.0	780.0
G81.0	920.4	937.5	944.8	950.3	949.0	934.0	900.9	862.3	814.1	761.4
G82.0	632.5	652.4	661.2	692.4	731.3	752.2	789.1	808.4	787.6	740.6
G83.0	317.9	338.9	339.5	369.5	406.3	445.2	504.0	585.7	650.8	685.4
G84.0	101.3	106.6	109.1	127.5	142.9	170.1	210.0	284.0	359.6	452.2
G85.0	19.3	20.0	20.1	22.4	25.9	30.6	43.1	70.0	103.7	164.4
G86.0	13.7	13.8	13.6	13.7	13.7	13.6	13.4	13.7	15.5	23.5
G87.0	8.3	8.6	8.5	8.5	8.6	8.7	9.0	9.6	9.9	10.5
G88.0	5.2	5.3	5.3	5.3	5.3	5.2	5.1	5.2	5.0	5.2
G89.0	4.6	4.6	4.6	4.6	4.6	4.5	4.4	4.3	4.2	4.0
G90.0	4.6	4.6	4.6	4.6	4.6	4.6	4.5	4.4	4.2	4.1
G91.0	4.8	4.7	4.8	4.8	4.8	4.7	4.7	4.6	4.4	4.2
G92.0	5.0	5.0	5.0	5.0	5.0	4.9	4.8	4.7	4.6	4.4
G93.0	5.2	5.2	5.2	5.2	5.2	5.1	5.0	4.9	4.7	4.5
G94.0	5.4	5.4	5.4	5.4	5.4	5.3	5.2	5.1	4.9	4.6
G95.0	5.6	5.6	5.6	5.6	5.5	5.5	5.4	5.3	5.1	4.8
G96.0	5.8	5.9	5.8	5.9	5.8	5.7	5.6	5.4	5.3	5.0
G97.0	6.1	6.1	6.1	6.1	6.0	6.0	5.8	5.6	5.4	5.3
G98.0	6.3	6.3	6.3	6.3	6.2	6.2	6.1	5.9	5.6	5.4
G99.0	6.6	6.6	6.6	6.6	6.5	6.4	6.3	6.1	5.8	5.6
G100.0	6.9	6.9	6.8	6.8	6.8	6.6	6.5	6.3	6.0	5.7
G101.0	7.1	7.1	7.1	7.0	6.9	6.8	6.6	6.4	6.2	5.9
G102.0	7.3	7.3	7.3	7.2	7.1	7.0	6.8	6.5	6.3	6.1
G103.0	7.4	7.4	7.4	7.3	7.3	7.2	7.0	6.8	6.5	6.2
G104.0	7.6	7.6	7.6	7.5	7.5	7.3	7.2	7.0	6.7	6.4
G105.0	7.8	7.9	7.8	7.8	7.7	7.6	7.4	7.2	6.9	6.6
G106.0	8.1	8.1	8.1	8.0	7.9	7.8	7.6	7.3	7.1	6.7
G107.0	8.3	8.3	8.3	8.3	8.1	8.0	7.8	7.6	7.3	7.0
G108.0	8.6	8.6	8.5	8.5	8.4	8.3	8.0	7.8	7.5	7.1
G109.0	8.8	8.8	8.8	8.7	8.6	8.4	8.2	7.9	7.6	7.3
G110.0	9.0	8.9	9.0	8.9	8.8	8.6	8.3	8.1	7.8	7.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	9.1	9.1	9.1	9.1	8.9	8.8	8.5	8.3	7.9	7.5
G112.0	9.3	9.3	9.3	9.2	9.1	8.9	8.6	8.3	8.0	7.6
G113.0	9.4	9.5	9.4	9.3	9.2	9.0	8.8	8.5	8.1	7.8
G114.0	9.6	9.6	9.6	9.5	9.3	9.1	8.9	8.6	8.3	7.9
G115.0	9.8	9.8	9.7	9.6	9.5	9.3	9.1	8.8	8.4	8.1
G116.0	9.9	9.9	9.9	9.8	9.7	9.4	9.2	8.8	8.6	8.2
G117.0	10.1	10.1	10.1	9.9	9.8	9.6	9.3	9.0	8.7	8.3
G118.0	10.2	10.2	10.2	10.1	9.9	9.8	9.5	9.2	8.8	8.5
G119.0	10.4	10.4	10.3	10.2	10.1	9.9	9.6	9.3	9.0	8.6
G120.0	10.5	10.5	10.5	10.4	10.2	10.0	9.8	9.4	9.1	8.7
G121.0	10.6	10.7	10.6	10.5	10.3	10.1	9.8	9.5	9.2	8.8
G122.0	10.7	10.8	10.7	10.6	10.4	10.2	9.9	9.6	9.3	9.0
G123.0	10.8	10.9	10.8	10.7	10.5	10.3	10.0	9.7	9.4	9.1
G124.0	10.9	10.9	10.8	10.7	10.5	10.3	10.1	9.8	9.5	9.0
G125.0	10.9	10.9	10.9	10.7	10.6	10.3	10.1	9.8	9.5	9.2
G126.0	10.9	10.9	10.9	10.8	10.6	10.4	10.1	9.9	9.6	9.3
G127.0	10.9	10.9	10.9	10.8	10.6	10.4	10.2	9.9	9.6	9.4
G128.0	11.0	11.0	10.9	10.8	10.7	10.4	10.2	9.9	9.7	9.5
G129.0	11.0	11.0	10.9	10.9	10.7	10.5	10.2	10.0	9.8	9.5
G130.0	11.0	11.0	10.9	10.9	10.7	10.5	10.3	10.1	9.8	9.6
G131.0	11.0	11.0	11.0	10.9	10.7	10.6	10.3	10.1	9.9	9.6
G132.0	11.0	11.0	11.0	10.9	10.8	10.6	10.4	10.1	9.9	9.7
G133.0	11.0	11.0	11.0	10.9	10.8	10.6	10.4	10.2	10.0	9.8
G134.0	11.1	11.1	11.0	10.9	10.8	10.6	10.4	10.3	10.1	9.9
G135.0	11.1	11.1	11.0	10.9	10.8	10.7	10.5	10.3	10.1	9.9
G136.0	11.1	11.1	11.0	10.9	10.8	10.7	10.5	10.4	10.2	10.0
G137.0	11.2	11.1	11.1	11.0	10.9	10.7	10.6	10.4	10.2	10.1
G138.0	11.1	11.1	11.1	11.0	10.9	10.8	10.6	10.4	10.3	10.1
G139.0	11.2	11.2	11.1	11.0	10.9	10.8	10.7	10.5	10.3	10.1
G140.0	11.2	11.2	11.1	11.0	10.9	10.8	10.7	10.5	10.4	10.2
G141.0	11.2	11.2	11.1	11.0	10.9	10.9	10.7	10.6	10.4	10.2
G142.0	11.2	11.2	11.2	11.0	10.9	10.9	10.7	10.6	10.4	10.3
G143.0	11.3	11.2	11.2	11.0	11.0	10.9	10.8	10.6	10.5	10.3
G144.0	11.3	11.2	11.2	11.1	11.0	10.9	10.8	10.6	10.5	10.3
G145.0	11.3	11.2	11.2	11.1	11.0	10.9	10.8	10.7	10.5	10.4
G146.0	11.3	11.2	11.2	11.1	11.0	10.9	10.8	10.6	10.5	10.4
G147.0	11.3	11.2	11.2	11.1	11.0	10.9	10.8	10.6	10.6	10.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	11.2	11.2	11.1	11.0	11.0	10.9	10.8	10.7	10.6	10.5
G149.0	11.2	11.2	11.1	11.0	11.0	10.9	10.8	10.7	10.6	10.5
G150.0	11.2	11.2	11.1	11.0	11.0	10.9	10.8	10.7	10.7	10.5
G151.0	11.2	11.2	11.1	11.0	11.0	10.9	10.8	10.7	10.6	10.6
G152.0	11.2	11.2	11.1	11.0	11.0	10.9	10.8	10.7	10.7	10.6
G153.0	11.2	11.2	11.1	11.0	11.0	10.9	10.8	10.7	10.6	10.6
G154.0	11.2	11.0	11.1	11.0	11.0	10.9	10.8	10.8	10.7	10.6
G155.0	11.1	11.1	11.1	11.0	11.0	10.9	10.9	10.8	10.7	10.6
G156.0	11.1	11.1	11.0	11.0	11.0	10.9	10.9	10.8	10.7	10.7
G157.0	11.1	11.1	11.0	11.0	10.9	10.9	10.9	10.8	10.7	10.7
G158.0	11.1	11.1	11.0	11.0	10.9	10.9	10.9	10.8	10.8	10.7
G159.0	11.1	11.1	11.0	11.0	11.0	10.9	10.9	10.8	10.8	10.8
G160.0	11.1	11.0	11.0	11.0	11.0	10.9	10.9	10.9	10.8	10.8
G161.0	11.1	11.0	11.0	11.0	10.9	10.9	10.9	10.9	10.8	10.8
G162.0	11.1	11.0	11.0	11.0	10.9	10.9	10.9	10.9	10.9	10.8
G163.0	11.0	11.0	11.0	11.0	10.9	10.9	10.9	10.9	10.9	10.9
G164.0	11.0	11.0	11.0	11.0	10.9	10.9	10.9	10.9	10.9	10.9
G165.0	11.0	11.0	11.0	11.0	11.0	10.9	10.9	10.9	10.9	10.9
G166.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
G167.0	11.0	11.0	11.0	11.0	10.9	10.9	11.0	11.0	11.0	11.1
G168.0	11.1	11.1	11.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1
G169.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.2	11.2
G170.0	11.2	11.1	11.1	11.1	11.2	11.1	11.2	11.2	11.2	11.2
G171.0	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.3	11.3
G172.0	11.3	11.2	11.2	11.2	11.2	11.2	11.3	11.3	11.3	11.3
G173.0	11.4	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.4	11.4
G174.0	11.4	11.3	11.3	11.3	11.3	11.3	11.4	11.4	11.4	11.4
G175.0	11.5	11.4	11.4	11.3	11.4	11.4	11.4	11.4	11.4	11.5
G176.0	11.6	11.4	11.4	11.4	11.4	11.4	11.4	11.5	11.5	11.5
G177.0	11.7	11.5	11.5	11.4	11.5	11.5	11.5	11.5	11.5	11.5
G178.0	11.7	11.6	11.5	11.5	11.5	11.5	11.6	11.6	11.6	11.6
G179.0	11.8	11.6	11.5	11.5	11.5	11.5	11.6	11.6	11.6	11.6
G180.0	11.8	11.7	11.6	11.5	11.6	11.6	11.6	11.6	11.6	11.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	1550.3	1550.2	1550.5	1550.9	1551.3	1551.8	1552.2	1552.8	1553.1	1553.9
G1.0	1546.9	1546.7	1547.4	1548.1	1548.8	1549.7	1550.3	1551.3	1552.0	1553.1
G2.0	1543.2	1543.1	1543.9	1544.8	1545.8	1546.9	1548.0	1549.1	1550.4	1551.6
G3.0	1539.1	1539.2	1539.9	1541.3	1542.4	1543.8	1545.2	1546.7	1548.1	1549.7
G4.0	1534.5	1535.1	1535.8	1537.6	1538.8	1540.0	1542.0	1543.8	1545.5	1547.3
G5.0	1530.3	1530.5	1531.7	1532.9	1534.6	1536.4	1538.0	1540.3	1542.5	1544.3
G6.0	1525.9	1525.5	1526.7	1528.2	1530.0	1532.1	1534.0	1536.2	1539.0	1540.8
G7.0	1521.4	1520.7	1521.9	1523.2	1524.9	1527.2	1529.3	1531.8	1534.7	1536.9
G8.0	1516.4	1515.4	1516.7	1517.7	1519.6	1521.5	1523.8	1526.8	1529.6	1532.6
G9.0	1511.9	1510.5	1511.3	1511.8	1513.5	1515.7	1518.1	1521.1	1523.9	1527.4
G10.0	1507.0	1505.1	1505.8	1505.6	1507.1	1509.0	1511.8	1514.7	1518.0	1521.9
G11.0	1502.4	1499.8	1499.8	1499.1	1500.4	1502.3	1505.1	1508.4	1511.8	1515.5
G12.0	1498.0	1494.9	1493.5	1492.4	1493.4	1495.0	1497.7	1501.0	1504.9	1508.6
G13.0	1493.3	1489.5	1487.1	1485.5	1486.1	1487.4	1490.0	1493.1	1497.4	1501.0
G14.0	1489.2	1483.7	1480.5	1478.2	1478.1	1478.8	1481.4	1484.6	1489.4	1493.4
G15.0	1484.9	1478.5	1473.9	1470.5	1469.7	1470.6	1473.0	1476.1	1481.0	1485.4
G16.0	1480.8	1473.1	1467.1	1462.5	1461.3	1461.4	1463.5	1467.1	1471.5	1476.9
G17.0	1476.7	1467.6	1460.3	1454.9	1452.3	1452.1	1453.8	1457.1	1462.2	1467.4
G18.0	1472.7	1461.9	1453.5	1446.9	1443.0	1442.1	1443.6	1447.3	1452.1	1457.8
G19.0	1468.6	1456.2	1446.3	1438.2	1433.4	1432.1	1433.1	1436.5	1441.8	1447.2
G20.0	1463.5	1450.2	1439.0	1429.3	1423.3	1421.0	1421.6	1425.0	1430.2	1436.2
G21.0	1458.3	1444.5	1431.6	1420.0	1413.2	1409.8	1410.0	1413.3	1418.8	1424.8
G22.0	1452.6	1438.3	1423.9	1411.2	1402.7	1398.0	1397.6	1401.0	1406.3	1412.8
G23.0	1446.7	1431.2	1416.0	1402.1	1391.5	1385.9	1384.9	1388.0	1393.9	1399.7
G24.0	1440.3	1423.9	1407.5	1392.1	1380.4	1373.3	1371.8	1374.5	1380.2	1386.8
G25.0	1433.3	1416.4	1399.2	1382.1	1368.8	1360.3	1358.3	1360.9	1366.8	1373.4
G26.0	1425.7	1408.3	1390.0	1371.4	1356.9	1346.4	1344.3	1346.4	1352.4	1359.4
G27.0	1418.1	1399.9	1380.4	1361.2	1344.8	1333.2	1329.7	1331.4	1338.0	1345.0
G28.0	1410.7	1390.6	1370.6	1350.2	1332.5	1319.0	1314.9	1316.0	1322.4	1330.5
G29.0	1402.7	1381.4	1360.4	1338.6	1318.9	1304.4	1298.9	1300.8	1307.1	1314.5
G30.0	1394.9	1371.6	1349.7	1326.5	1305.6	1289.3	1282.6	1283.9	1290.6	1298.8
G31.0	1387.3	1362.4	1338.8	1314.2	1292.1	1273.8	1266.8	1267.5	1274.6	1283.1
G32.0	1379.3	1352.4	1326.7	1301.4	1277.8	1258.2	1249.1	1249.8	1257.1	1266.1
G33.0	1372.0	1342.9	1315.0	1288.4	1262.6	1242.4	1232.9	1232.6	1240.0	1248.9
G34.0	1364.8	1333.2	1303.2	1274.6	1247.9	1225.8	1214.3	1214.4	1222.0	1231.7
G35.0	1357.6	1323.5	1291.0	1261.7	1232.3	1208.2	1196.4	1195.9	1203.8	1213.3
G36.0	1351.4	1313.4	1279.2	1247.1	1216.8	1190.8	1177.3	1176.6	1184.6	1194.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	1345.9	1304.2	1267.3	1233.1	1202.3	1173.7	1158.5	1157.6	1165.4	1175.9
G38.0	1341.0	1294.9	1255.0	1218.6	1185.4	1155.0	1137.9	1137.5	1145.7	1156.0
G39.0	1337.1	1286.5	1243.1	1204.3	1169.9	1137.1	1118.4	1117.8	1125.6	1136.6
G40.0	1333.9	1279.0	1231.5	1190.0	1153.2	1118.9	1098.0	1096.6	1105.2	1115.9
G41.0	1330.8	1272.2	1220.1	1175.9	1137.3	1100.1	1077.3	1075.7	1084.6	1095.3
G42.0	1329.2	1265.7	1208.7	1161.5	1120.9	1080.9	1056.3	1053.5	1062.8	1074.0
G43.0	1328.5	1259.7	1198.1	1146.6	1104.0	1061.6	1035.3	1031.5	1039.9	1052.3
G44.0	1329.1	1254.0	1188.4	1131.5	1086.6	1043.2	1012.8	1007.8	1017.0	1029.4
G45.0	1330.0	1249.5	1178.5	1117.7	1069.3	1024.9	992.0	984.9	993.0	1006.8
G46.0	1331.1	1245.9	1169.9	1104.0	1052.4	1006.5	971.3	960.8	970.1	983.0
G47.0	1331.8	1243.2	1161.7	1091.1	1035.8	989.6	950.2	937.7	946.4	959.9
G48.0	1331.7	1241.7	1153.0	1078.1	1018.9	970.0	929.0	914.8	922.3	935.1
G49.0	1330.0	1239.9	1145.6	1065.7	1001.6	951.5	907.3	890.0	897.7	910.8
G50.0	1326.3	1238.1	1138.6	1053.8	985.2	932.5	886.3	867.1	873.4	885.6
G51.0	1320.3	1235.6	1133.1	1042.5	968.6	913.4	864.4	842.7	849.3	860.9
G52.0	1314.0	1232.3	1128.2	1030.4	951.6	893.1	843.2	818.8	823.9	836.0
G53.0	1309.6	1225.7	1123.2	1018.6	935.0	872.7	822.1	794.9	798.9	811.2
G54.0	1306.4	1218.1	1118.1	1006.8	919.6	852.8	800.5	770.8	773.7	786.4
G55.0	1303.0	1208.0	1112.5	996.4	905.2	833.2	779.4	745.9	748.4	760.6
G56.0	1297.6	1200.9	1104.6	987.8	890.3	813.8	758.7	722.1	723.0	734.5
G57.0	1289.0	1195.0	1094.4	980.5	876.5	794.7	737.0	697.6	697.2	710.3
G58.0	1277.7	1187.7	1083.3	974.2	862.1	776.1	716.3	673.6	671.3	683.4
G59.0	1264.8	1178.9	1072.8	967.3	848.4	757.4	694.1	648.3	645.2	658.1
G60.0	1251.1	1168.3	1064.7	959.8	835.3	739.8	672.5	623.5	619.0	631.4
G61.0	1236.3	1155.7	1057.9	948.9	824.2	721.9	649.7	597.5	592.8	604.8
G62.0	1220.6	1141.4	1050.1	937.7	814.1	704.7	628.0	572.1	565.7	577.6
G63.0	1205.0	1127.0	1040.3	925.0	805.4	687.2	604.4	545.9	536.7	550.7
G64.0	1193.0	1111.6	1028.5	914.6	796.5	670.8	581.6	520.4	508.6	523.2
G65.0	1177.4	1095.3	1014.8	905.5	786.4	653.3	557.7	492.9	481.3	496.6
G66.0	1157.2	1084.2	998.9	895.7	772.5	636.2	534.5	468.4	455.4	470.4
G67.0	1125.8	1071.6	981.1	885.2	757.8	619.4	511.4	444.3	429.6	446.2
G68.0	1073.1	1052.0	964.7	872.5	742.0	604.6	491.5	420.9	403.8	422.1
G69.0	994.9	1026.4	953.5	854.7	727.2	591.7	471.0	396.7	378.1	398.3
G70.0	927.0	977.3	937.5	833.7	712.5	580.6	452.0	375.0	352.3	374.5
G71.0	886.5	896.6	916.0	813.1	701.4	566.5	433.0	351.2	324.7	350.7
G72.0	858.8	822.5	880.6	796.4	687.5	550.0	415.1	327.8	298.7	326.8
G73.0	836.4	783.0	801.7	774.9	667.2	531.8	395.7	303.3	273.7	303.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	816.5	756.7	711.7	754.7	646.9	517.3	377.0	281.1	250.0	282.0
G75.0	798.7	733.8	666.4	702.9	631.2	505.5	360.5	259.4	225.4	262.0
G76.0	783.0	713.2	640.4	605.0	611.4	490.3	348.0	238.0	202.9	241.3
G77.0	767.6	691.4	618.0	550.1	593.5	467.0	333.8	215.7	180.5	221.2
G78.0	752.8	673.3	599.0	524.5	526.2	448.3	315.4	195.3	158.7	203.2
G79.0	734.6	657.7	581.2	501.0	429.6	428.5	296.4	177.0	137.4	188.1
G80.0	714.4	642.0	565.3	479.2	398.4	413.7	284.9	159.1	117.4	171.8
G81.0	694.1	623.2	545.0	460.1	377.7	331.3	264.6	142.9	97.6	157.4
G82.0	674.5	602.4	519.9	443.0	356.1	273.6	247.3	127.5	80.0	146.5
G83.0	650.1	579.7	496.2	424.0	337.6	250.1	228.9	113.7	63.0	134.9
G84.0	531.0	540.1	478.1	401.4	317.4	231.9	164.3	99.1	47.6	121.9
G85.0	241.8	339.4	413.1	377.9	291.2	212.4	133.6	86.4	33.8	107.2
G86.0	42.0	83.6	163.4	250.4	270.6	192.9	117.4	69.8	22.0	88.9
G87.0	10.6	10.7	13.8	32.0	97.5	155.5	99.8	41.9	12.8	56.3
G88.0	5.0	5.3	5.5	5.8	7.3	12.3	42.8	28.2	6.3	45.4
G89.0	3.8	3.5	3.2	2.9	2.6	2.3	2.2	2.3	1.6	3.7
G90.0	3.8	3.5	3.2	2.9	2.6	2.2	1.9	1.7	1.5	1.7
G91.0	4.0	3.7	3.3	3.0	2.6	2.3	2.0	1.9	1.7	1.8
G92.0	4.1	3.8	3.5	3.1	2.8	2.4	2.2	1.9	1.9	1.9
G93.0	4.2	3.9	3.5	3.2	2.9	2.6	2.3	2.1	2.0	2.0
G94.0	4.4	4.1	3.7	3.3	3.0	2.8	2.5	2.3	2.2	2.2
G95.0	4.6	4.2	3.9	3.5	3.2	2.9	2.6	2.5	2.4	2.3
G96.0	4.7	4.4	4.0	3.7	3.3	3.1	2.8	2.6	2.5	2.5
G97.0	4.9	4.6	4.2	3.8	3.5	3.2	2.9	2.8	2.7	2.7
G98.0	5.1	4.7	4.4	4.0	3.7	3.3	3.1	3.0	2.9	2.8
G99.0	5.3	4.9	4.5	4.2	3.8	3.5	3.3	3.2	3.1	3.0
G100.0	5.4	5.0	4.7	4.3	3.9	3.7	3.5	3.3	3.2	3.2
G101.0	5.5	5.2	4.8	4.4	4.1	3.8	3.7	3.5	3.4	3.4
G102.0	5.7	5.4	5.0	4.6	4.3	4.0	3.8	3.7	3.6	3.5
G103.0	5.9	5.5	5.1	4.7	4.4	4.2	4.0	3.9	3.8	3.7
G104.0	6.1	5.7	5.3	4.9	4.6	4.4	4.2	4.1	4.0	3.9
G105.0	6.2	5.8	5.4	5.1	4.8	4.5	4.4	4.2	4.2	4.1
G106.0	6.4	6.0	5.6	5.3	4.9	4.7	4.6	4.4	4.4	4.3
G107.0	6.6	6.2	5.8	5.4	5.1	4.9	4.7	4.6	4.6	4.6
G108.0	6.7	6.3	5.9	5.6	5.3	5.1	4.9	4.8	4.7	4.7
G109.0	6.9	6.5	6.1	5.7	5.5	5.2	5.1	4.9	4.9	4.9
G110.0	7.0	6.6	6.2	5.9	5.5	5.4	5.2	5.1	5.1	5.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	7.2	6.7	6.3	6.0	5.7	5.5	5.4	5.3	5.3	5.3
G112.0	7.3	6.8	6.4	6.2	5.9	5.6	5.5	5.4	5.4	5.4
G113.0	7.4	7.0	6.6	6.3	6.0	5.8	5.6	5.6	5.6	5.6
G114.0	7.5	7.2	6.8	6.4	6.2	6.0	5.8	5.8	5.7	5.7
G115.0	7.7	7.3	6.9	6.6	6.3	6.1	6.0	5.9	5.9	5.9
G116.0	7.8	7.4	7.1	6.8	6.5	6.3	6.2	6.1	6.1	6.1
G117.0	8.0	7.6	7.3	7.0	6.7	6.4	6.3	6.3	6.3	6.3
G118.0	8.1	7.8	7.4	7.1	6.8	6.6	6.4	6.4	6.4	6.4
G119.0	8.3	7.9	7.6	7.3	7.0	6.7	6.6	6.5	6.6	6.6
G120.0	8.4	8.1	7.7	7.4	7.1	6.9	6.7	6.7	6.7	6.7
G121.0	8.5	8.2	7.9	7.5	7.3	7.0	6.9	6.7	6.9	6.9
G122.0	8.6	8.3	8.0	7.7	7.4	7.2	7.0	7.0	7.1	7.1
G123.0	8.7	8.4	8.1	7.8	7.5	7.3	7.2	7.2	7.2	7.2
G124.0	8.8	8.5	8.2	7.9	7.6	7.4	7.3	7.3	7.3	7.3
G125.0	8.9	8.6	8.3	8.0	7.8	7.5	7.4	7.4	7.5	7.5
G126.0	9.0	8.7	8.4	8.1	7.9	7.7	7.6	7.5	7.6	7.6
G127.0	9.1	8.8	8.5	8.3	8.0	7.8	7.7	7.7	7.7	7.8
G128.0	9.1	8.9	8.6	8.3	8.1	8.0	7.8	7.8	7.9	7.9
G129.0	9.2	9.0	8.7	8.5	8.3	8.1	8.0	8.0	8.0	8.0
G130.0	9.3	9.1	8.8	8.6	8.3	8.2	8.1	8.1	8.1	8.1
G131.0	9.4	9.1	8.9	8.7	8.4	8.3	8.2	8.2	8.3	8.3
G132.0	9.5	9.2	9.0	8.8	8.6	8.4	8.3	8.3	8.4	8.4
G133.0	9.5	9.3	9.1	8.9	8.7	8.5	8.4	8.4	8.5	8.5
G134.0	9.6	9.4	9.1	9.0	8.8	8.6	8.5	8.5	8.6	8.6
G135.0	9.7	9.5	9.2	9.1	8.9	8.7	8.6	8.7	8.7	8.7
G136.0	9.8	9.6	9.3	9.1	8.9	8.8	8.8	8.8	8.8	8.9
G137.0	9.8	9.6	9.4	9.2	9.0	8.9	8.9	8.9	8.9	8.9
G138.0	9.9	9.7	9.5	9.2	9.1	9.0	9.0	9.0	9.1	9.1
G139.0	9.9	9.8	9.6	9.4	9.2	9.1	9.1	9.1	9.1	9.2
G140.0	10.0	9.8	9.6	9.4	9.2	9.2	9.1	9.2	9.2	9.3
G141.0	10.1	9.9	9.7	9.5	9.3	9.2	9.2	9.3	9.3	9.3
G142.0	10.1	9.9	9.7	9.6	9.4	9.3	9.3	9.4	9.4	9.5
G143.0	10.1	10.0	9.8	9.6	9.5	9.4	9.4	9.5	9.5	9.6
G144.0	10.2	10.1	9.9	9.7	9.5	9.5	9.5	9.6	9.6	9.6
G145.0	10.2	10.1	9.9	9.8	9.6	9.6	9.6	9.6	9.7	9.7
G146.0	10.3	10.1	9.9	9.8	9.7	9.7	9.7	9.8	9.8	9.8
G147.0	10.3	10.2	10.0	9.9	9.8	9.8	9.8	9.9	9.9	9.9

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	10.3	10.2	10.1	9.9	9.9	9.9	9.9	9.9	9.9	10.0
G149.0	10.4	10.2	10.1	10.1	9.9	9.9	9.9	10.0	10.1	10.1
G150.0	10.3	10.3	10.2	10.1	10.1	10.1	10.1	10.1	10.1	10.1
G151.0	10.5	10.3	10.2	10.1	10.1	10.1	10.1	10.2	10.2	10.2
G152.0	10.5	10.4	10.3	10.2	10.2	10.2	10.2	10.3	10.3	10.3
G153.0	10.5	10.4	10.3	10.3	10.3	10.3	10.3	10.3	10.4	10.4
G154.0	10.5	10.5	10.4	10.4	10.4	10.4	10.4	10.4	10.4	10.5
G155.0	10.6	10.5	10.5	10.5	10.4	10.5	10.4	10.5	10.5	10.5
G156.0	10.6	10.6	10.5	10.5	10.5	10.5	10.5	10.6	10.6	10.6
G157.0	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.7	10.7	10.7
G158.0	10.7	10.6	10.7	10.7	10.7	10.7	10.7	10.7	10.8	10.8
G159.0	10.7	10.7	10.7	10.8	10.8	10.8	10.8	10.8	10.8	10.8
G160.0	10.8	10.8	10.8	10.9	10.9	10.9	10.9	10.9	10.9	10.9
G161.0	10.8	10.8	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9
G162.0	10.8	10.9	10.9	10.9	10.9	10.9	11.0	11.0	11.0	11.0
G163.0	10.9	10.9	10.9	11.0	11.0	11.1	11.0	11.0	11.0	11.0
G164.0	10.9	10.9	11.0	11.0	11.1	11.1	11.1	11.1	11.1	11.1
G165.0	10.9	11.0	11.0	11.1	11.1	11.2	11.2	11.2	11.1	11.1
G166.0	11.0	11.1	11.1	11.1	11.2	11.2	11.3	11.2	11.2	11.2
G167.0	11.1	11.1	11.1	11.2	11.3	11.3	11.3	11.3	11.2	11.2
G168.0	11.2	11.2	11.2	11.3	11.3	11.4	11.4	11.4	11.3	11.3
G169.0	11.2	11.1	11.3	11.3	11.4	11.4	11.5	11.4	11.4	11.4
G170.0	11.2	11.3	11.3	11.4	11.4	11.5	11.5	11.5	11.5	11.4
G171.0	11.3	11.3	11.4	11.4	11.5	11.5	11.6	11.6	11.5	11.5
G172.0	11.4	11.4	11.4	11.5	11.5	11.6	11.6	11.6	11.6	11.5
G173.0	11.4	11.4	11.5	11.5	11.6	11.6	11.7	11.6	11.6	11.6
G174.0	11.4	11.5	11.5	11.6	11.6	11.6	11.7	11.7	11.7	11.6
G175.0	11.5	11.5	11.6	11.6	11.6	11.6	11.7	11.7	11.7	11.6
G176.0	11.5	11.5	11.6	11.6	11.6	11.7	11.7	11.7	11.7	11.7
G177.0	11.6	11.6	11.6	11.6	11.6	11.7	11.7	11.8	11.7	11.7
G178.0	11.6	11.6	11.6	11.6	11.6	11.7	11.7	11.8	11.8	11.7
G179.0	11.6	11.6	11.6	11.7	11.7	11.7	11.7	11.8	11.8	11.8
G180.0	11.6	11.6	11.6	11.7	11.7	11.7	11.7	11.8	11.8	11.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	1554.0	1554.2	1555.0	1554.7	1556.3	1556.1	1556.6	1557.2	1557.1	1557.8
G1.0	1553.6	1553.9	1555.3	1555.2	1557.1	1557.6	1558.2	1558.7	1559.2	1560.3
G2.0	1552.5	1553.3	1554.8	1555.3	1557.4	1558.6	1559.2	1560.0	1560.7	1562.2
G3.0	1550.9	1552.2	1554.0	1554.9	1557.0	1558.1	1559.6	1560.9	1561.9	1563.6
G4.0	1548.7	1550.4	1552.6	1553.8	1556.3	1557.7	1559.7	1561.0	1562.4	1564.4
G5.0	1546.1	1548.3	1550.7	1552.1	1554.8	1556.9	1558.7	1561.0	1563.0	1565.3
G6.0	1542.9	1545.4	1548.2	1549.8	1553.1	1555.4	1558.1	1560.9	1563.3	1565.9
G7.0	1539.4	1542.2	1545.2	1547.3	1551.0	1553.8	1557.2	1560.0	1562.8	1565.6
G8.0	1535.1	1538.2	1541.7	1543.9	1548.4	1552.1	1555.7	1558.9	1561.7	1564.6
G9.0	1530.2	1533.6	1537.4	1540.5	1545.5	1549.4	1553.7	1556.9	1560.2	1563.2
G10.0	1524.8	1528.5	1532.9	1536.8	1542.1	1546.4	1550.8	1554.5	1558.2	1562.1
G11.0	1519.1	1522.8	1527.8	1532.6	1538.1	1542.7	1547.3	1551.6	1556.2	1560.6
G12.0	1512.7	1516.7	1522.6	1527.6	1533.4	1538.1	1543.5	1548.6	1553.8	1558.2
G13.0	1505.8	1510.1	1516.7	1522.1	1528.0	1533.5	1539.3	1545.2	1550.8	1555.8
G14.0	1497.9	1503.1	1510.3	1516.1	1522.2	1528.4	1534.9	1541.0	1547.4	1552.9
G15.0	1490.2	1495.9	1503.2	1509.4	1516.2	1523.1	1530.1	1536.9	1543.8	1550.3
G16.0	1481.4	1487.6	1495.8	1502.2	1509.5	1517.1	1524.8	1532.2	1540.0	1547.7
G17.0	1472.3	1479.6	1487.8	1494.6	1502.6	1510.9	1519.1	1527.7	1536.7	1544.8
G18.0	1462.9	1470.3	1479.4	1486.5	1495.2	1504.2	1513.2	1523.1	1533.1	1541.9
G19.0	1453.0	1461.4	1470.4	1478.1	1487.8	1497.3	1507.5	1518.2	1529.2	1539.4
G20.0	1442.5	1451.1	1460.4	1469.3	1479.5	1489.3	1501.2	1512.9	1525.3	1536.9
G21.0	1431.9	1440.8	1450.3	1460.1	1471.1	1482.0	1495.0	1507.8	1521.4	1535.1
G22.0	1419.9	1429.6	1439.6	1450.2	1461.9	1474.4	1488.2	1502.6	1517.9	1533.3
G23.0	1408.2	1417.8	1428.7	1440.1	1453.0	1466.6	1481.3	1498.0	1514.5	1531.3
G24.0	1395.5	1405.7	1418.0	1429.6	1443.1	1457.9	1474.7	1493.0	1511.7	1528.8
G25.0	1382.9	1393.4	1405.7	1419.0	1433.3	1450.1	1468.2	1488.4	1507.7	1526.2
G26.0	1369.3	1380.4	1393.5	1407.1	1423.1	1441.4	1461.6	1483.5	1503.7	1522.7
G27.0	1355.4	1367.1	1380.4	1395.6	1412.8	1432.9	1454.9	1478.3	1499.5	1519.6
G28.0	1340.7	1352.7	1367.3	1383.3	1402.2	1424.1	1448.2	1472.0	1494.8	1517.1
G29.0	1326.5	1338.4	1353.8	1371.2	1391.4	1415.4	1441.2	1466.5	1490.7	1514.2
G30.0	1310.8	1323.5	1339.7	1358.4	1380.6	1406.7	1433.6	1459.8	1486.6	1511.3
G31.0	1295.2	1308.4	1325.4	1345.6	1369.5	1397.8	1426.2	1454.2	1482.3	1508.4
G32.0	1278.3	1292.3	1310.7	1331.9	1357.8	1388.0	1417.7	1448.0	1477.7	1505.5
G33.0	1261.9	1276.8	1295.2	1318.2	1346.4	1378.2	1409.8	1442.2	1473.3	1503.2
G34.0	1244.5	1259.8	1279.8	1303.7	1334.7	1368.0	1401.9	1436.2	1469.1	1501.0
G35.0	1226.3	1243.2	1263.4	1289.8	1322.3	1357.5	1394.1	1430.1	1465.2	1498.6
G36.0	1208.0	1225.3	1246.8	1274.8	1309.8	1347.4	1385.7	1423.9	1461.5	1496.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	1189.2	1207.3	1230.5	1260.6	1297.1	1337.1	1377.5	1418.6	1457.8	1493.5
G38.0	1170.5	1189.1	1213.1	1246.0	1283.5	1326.2	1368.8	1413.2	1453.7	1491.0
G39.0	1150.5	1170.4	1196.2	1231.0	1270.3	1315.1	1361.0	1407.4	1449.7	1489.3
G40.0	1130.6	1151.2	1178.8	1215.3	1256.9	1303.7	1353.1	1401.9	1446.3	1489.1
G41.0	1110.8	1131.8	1160.6	1200.0	1244.1	1293.5	1345.1	1395.8	1443.3	1489.8
G42.0	1089.9	1111.4	1142.9	1184.0	1231.2	1283.0	1336.9	1390.1	1441.8	1492.8
G43.0	1068.9	1091.4	1124.7	1167.6	1218.5	1273.4	1329.1	1385.0	1441.3	1496.6
G44.0	1047.4	1070.1	1106.3	1151.7	1205.9	1263.4	1321.2	1381.0	1442.6	1501.7
G45.0	1025.1	1049.0	1087.2	1136.5	1193.9	1253.8	1313.9	1378.2	1444.6	1507.7
G46.0	1001.8	1028.0	1068.6	1121.9	1181.8	1244.5	1307.8	1376.7	1448.2	1514.4
G47.0	979.0	1006.4	1050.1	1108.1	1170.2	1235.5	1302.6	1376.7	1452.8	1520.3
G48.0	953.3	983.1	1031.2	1093.7	1158.2	1226.8	1298.9	1378.2	1457.4	1525.6
G49.0	929.3	959.9	1013.2	1079.4	1147.3	1218.8	1296.9	1380.9	1460.7	1526.6
G50.0	904.0	937.8	994.8	1065.0	1135.7	1211.8	1296.3	1383.8	1462.3	1527.9
G51.0	879.3	915.7	976.7	1049.9	1125.2	1206.0	1296.9	1385.3	1461.3	1530.6
G52.0	854.7	894.0	958.3	1034.8	1114.2	1202.2	1297.9	1385.8	1461.4	1534.2
G53.0	830.5	872.3	941.3	1019.3	1104.3	1199.5	1297.8	1383.5	1463.2	1537.6
G54.0	806.3	852.6	923.9	1004.5	1095.3	1197.8	1296.8	1382.3	1465.5	1538.0
G55.0	782.7	831.6	906.8	990.1	1087.3	1196.1	1294.1	1382.5	1466.5	1532.3
G56.0	759.9	812.6	890.0	977.0	1080.3	1192.9	1290.9	1383.5	1463.5	1521.8
G57.0	736.6	794.4	873.6	964.6	1073.4	1189.1	1289.3	1382.1	1455.4	1511.5
G58.0	713.3	775.7	857.6	954.1	1068.0	1183.4	1288.2	1378.1	1444.7	1500.5
G59.0	690.2	757.3	843.0	943.8	1062.2	1177.3	1285.3	1369.0	1433.9	1488.2
G60.0	666.1	739.3	829.2	935.8	1057.3	1171.4	1281.0	1358.9	1421.2	1475.9
G61.0	642.9	719.7	816.1	928.7	1051.1	1165.4	1271.7	1346.9	1407.3	1464.2
G62.0	620.4	701.2	802.4	922.9	1045.5	1159.2	1259.6	1332.6	1394.3	1452.3
G63.0	597.9	682.1	789.8	917.7	1038.5	1153.1	1243.9	1317.0	1383.3	1436.9
G64.0	577.0	665.2	777.6	912.1	1032.5	1142.2	1226.3	1303.4	1370.7	1414.9
G65.0	555.4	649.4	768.0	905.4	1027.0	1130.2	1207.5	1291.5	1349.6	1385.4
G66.0	534.0	635.7	759.6	896.7	1021.7	1112.2	1193.3	1275.4	1323.7	1345.4
G67.0	511.8	620.4	753.3	887.0	1010.1	1093.7	1180.1	1249.2	1285.8	1291.9
G68.0	490.7	602.5	746.3	878.9	994.5	1079.0	1163.0	1217.4	1235.0	1228.3
G69.0	470.7	585.5	736.5	872.8	974.2	1065.8	1137.2	1169.8	1169.3	1167.8
G70.0	452.4	572.9	722.5	861.3	955.6	1049.3	1101.9	1106.5	1104.7	1129.4
G71.0	435.1	563.4	710.5	843.4	941.2	1024.0	1049.3	1033.3	1059.0	1102.2
G72.0	418.8	556.0	700.2	822.5	924.8	990.3	977.7	982.5	1029.0	1081.3
G73.0	402.5	545.8	690.4	801.5	899.6	930.2	908.7	951.2	1005.9	1063.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	384.0	532.9	673.4	782.6	866.7	847.3	872.6	929.1	987.0	1047.0
G75.0	367.0	519.3	650.8	758.8	800.7	790.0	848.3	911.1	971.0	1032.4
G76.0	356.5	508.3	632.1	732.2	714.0	762.9	829.7	895.6	956.6	1019.1
G77.0	347.8	494.5	613.5	670.8	664.4	741.5	813.5	881.5	944.1	1006.7
G78.0	336.0	471.4	589.3	579.9	639.6	723.3	799.3	869.2	934.0	995.5
G79.0	317.8	451.6	544.7	540.9	620.7	705.4	786.0	858.7	924.0	984.5
G80.0	307.0	429.7	446.6	520.2	605.5	689.9	775.2	848.7	913.4	973.5
G81.0	291.1	404.9	410.5	501.3	591.0	676.9	763.4	837.5	900.4	959.0
G82.0	269.5	314.9	392.3	483.9	578.8	665.3	747.8	823.6	881.8	936.7
G83.0	247.2	281.4	375.0	470.3	565.7	652.1	726.7	801.0	856.5	907.7
G84.0	195.0	262.9	359.8	458.3	548.2	628.8	697.7	769.4	825.7	876.8
G85.0	157.5	248.8	347.5	441.5	520.2	597.9	664.2	730.7	782.2	827.8
G86.0	143.4	235.3	326.9	406.9	482.3	550.1	592.7	616.5	630.4	641.9
G87.0	130.2	211.9	289.2	339.4	352.5	358.4	355.9	353.5	349.7	350.9
G88.0	97.6	123.3	128.6	120.2	107.1	108.9	107.0	104.3	104.1	107.4
G89.0	5.0	6.3	8.3	9.0	9.8	10.8	11.9	13.2	14.2	16.0
G90.0	1.9	2.1	2.6	3.3	4.3	5.4	6.5	7.6	8.5	9.2
G91.0	1.9	2.1	2.3	2.7	3.0	3.4	3.8	4.3	4.9	5.4
G92.0	1.9	2.1	2.4	2.7	3.0	3.3	3.6	3.9	4.1	4.3
G93.0	2.1	2.3	2.5	2.8	3.1	3.4	3.7	3.9	4.1	4.2
G94.0	2.2	2.4	2.6	2.9	3.2	3.5	3.8	4.1	4.2	4.4
G95.0	2.4	2.5	2.8	3.0	3.4	3.7	3.9	4.2	4.4	4.5
G96.0	2.6	2.7	2.9	3.2	3.5	3.8	4.1	4.3	4.4	4.6
G97.0	2.8	2.9	3.0	3.3	3.7	4.0	4.2	4.5	4.6	4.8
G98.0	2.9	3.0	3.2	3.5	3.8	4.1	4.4	4.6	4.8	5.0
G99.0	3.1	3.2	3.4	3.7	4.0	4.3	4.6	4.8	5.0	5.2
G100.0	3.3	3.4	3.5	3.8	4.1	4.4	4.8	5.0	5.3	5.4
G101.0	3.4	3.5	3.7	4.0	4.3	4.6	4.9	5.2	5.4	5.6
G102.0	3.6	3.7	3.8	4.2	4.4	4.8	5.1	5.4	5.6	5.8
G103.0	3.8	3.9	4.0	4.3	4.6	4.9	5.3	5.5	5.8	6.0
G104.0	3.9	4.0	4.2	4.5	4.8	5.1	5.4	5.7	5.9	6.2
G105.0	4.1	4.2	4.4	4.6	5.0	5.3	5.6	5.9	6.1	6.3
G106.0	4.3	4.4	4.6	4.8	5.1	5.4	5.8	6.1	6.3	6.5
G107.0	4.5	4.6	4.7	5.0	5.3	5.6	5.9	6.3	6.5	6.7
G108.0	4.7	4.8	4.9	5.2	5.5	5.8	6.2	6.4	6.7	6.9
G109.0	4.9	5.0	5.1	5.4	5.7	6.0	6.3	6.6	6.9	7.1
G110.0	5.1	5.2	5.3	5.5	5.8	6.2	6.5	6.8	7.1	7.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	5.3	5.3	5.4	5.7	6.0	6.3	6.7	7.0	7.3	7.5
G112.0	5.4	5.5	5.6	5.9	6.2	6.5	6.8	7.2	7.4	7.7
G113.0	5.6	5.6	5.8	6.0	6.3	6.6	7.0	7.3	7.6	7.8
G114.0	5.8	5.8	6.0	6.2	6.5	6.8	7.1	7.4	7.7	8.0
G115.0	5.9	6.0	6.2	6.3	6.6	7.0	7.3	7.6	7.9	8.1
G116.0	6.1	6.2	6.3	6.5	6.8	7.1	7.4	7.8	8.0	8.3
G117.0	6.3	6.3	6.5	6.7	7.0	7.3	7.6	7.9	8.2	8.4
G118.0	6.4	6.5	6.6	6.9	7.1	7.4	7.7	8.1	8.3	8.6
G119.0	6.6	6.7	6.8	7.0	7.3	7.5	7.9	8.2	8.5	8.7
G120.0	6.8	6.8	7.0	7.2	7.4	7.7	8.1	8.3	8.6	8.9
G121.0	6.9	7.0	7.2	7.3	7.6	7.9	8.1	8.5	8.8	9.1
G122.0	7.0	7.2	7.3	7.5	7.8	8.0	8.3	8.6	8.9	9.2
G123.0	7.2	7.3	7.4	7.6	7.9	8.1	8.4	8.7	9.1	9.3
G124.0	7.3	7.4	7.6	7.8	8.0	8.3	8.5	8.9	9.1	9.4
G125.0	7.5	7.6	7.7	7.9	8.1	8.4	8.7	9.0	9.2	9.5
G126.0	7.6	7.7	7.9	8.1	8.1	8.5	8.8	9.0	9.3	9.6
G127.0	7.8	7.9	8.0	8.1	8.3	8.6	8.9	9.1	9.4	9.7
G128.0	7.9	8.0	8.1	8.3	8.5	8.7	8.9	9.2	9.5	9.7
G129.0	8.1	8.1	8.3	8.4	8.6	8.8	9.1	9.3	9.5	9.8
G130.0	8.2	8.3	8.4	8.6	8.7	8.9	9.1	9.4	9.6	9.9
G131.0	8.3	8.4	8.5	8.7	8.8	9.1	9.2	9.5	9.7	9.9
G132.0	8.4	8.5	8.6	8.8	9.0	9.1	9.3	9.5	9.8	9.9
G133.0	8.5	8.6	8.8	8.9	9.1	9.2	9.4	9.6	9.9	10.1
G134.0	8.7	8.7	8.9	9.1	9.2	9.4	9.5	9.8	9.9	10.1
G135.0	8.8	8.8	9.0	9.1	9.3	9.5	9.6	9.8	10.0	10.2
G136.0	8.9	8.9	9.1	9.2	9.4	9.6	9.8	9.9	10.1	10.2
G137.0	9.0	9.1	9.1	9.3	9.5	9.7	9.8	10.0	10.1	10.3
G138.0	9.1	9.1	9.2	9.4	9.6	9.8	9.9	10.1	10.2	10.4
G139.0	9.2	9.2	9.3	9.5	9.7	9.9	10.0	10.1	10.3	10.4
G140.0	9.3	9.2	9.4	9.6	9.8	9.9	10.1	10.2	10.4	10.5
G141.0	9.4	9.4	9.5	9.7	9.8	10.0	10.1	10.3	10.4	10.6
G142.0	9.5	9.5	9.6	9.7	9.9	10.1	10.2	10.4	10.5	10.6
G143.0	9.6	9.6	9.7	9.8	9.9	10.1	10.3	10.4	10.6	10.7
G144.0	9.6	9.7	9.7	9.9	10.0	10.2	10.3	10.5	10.6	10.7
G145.0	9.7	9.8	9.8	9.9	10.1	10.2	10.4	10.5	10.7	10.8
G146.0	9.8	9.9	9.9	10.0	10.1	10.3	10.4	10.6	10.7	10.8
G147.0	9.9	9.9	9.9	10.1	10.1	10.3	10.5	10.6	10.7	10.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	9.9	10.0	10.1	10.1	10.2	10.4	10.5	10.6	10.8	10.9
G149.0	10.1	10.1	10.1	10.2	10.3	10.4	10.5	10.7	10.8	10.9
G150.0	10.1	10.1	10.2	10.2	10.3	10.4	10.6	10.7	10.8	10.9
G151.0	10.2	10.2	10.2	10.3	10.4	10.5	10.6	10.7	10.9	10.9
G152.0	10.3	10.2	10.3	10.4	10.4	10.5	10.7	10.8	10.9	10.9
G153.0	10.4	10.4	10.4	10.4	10.5	10.6	10.7	10.8	10.9	11.0
G154.0	10.4	10.4	10.5	10.5	10.5	10.6	10.7	10.9	10.9	11.0
G155.0	10.5	10.5	10.5	10.6	10.6	10.7	10.7	10.9	10.9	11.0
G156.0	10.6	10.6	10.6	10.6	10.7	10.7	10.8	10.9	11.0	11.0
G157.0	10.7	10.7	10.7	10.7	10.7	10.8	10.8	10.9	11.0	11.0
G158.0	10.8	10.7	10.7	10.8	10.8	10.8	10.9	10.9	11.0	11.1
G159.0	10.8	10.8	10.8	10.8	10.8	10.9	10.9	10.9	11.0	11.1
G160.0	10.9	10.9	10.9	10.9	10.9	10.9	10.9	11.0	11.0	11.1
G161.0	10.9	10.9	10.9	10.9	10.9	10.9	11.0	11.0	11.1	11.1
G162.0	11.0	11.0	11.0	10.9	10.9	11.0	11.0	11.0	11.1	11.2
G163.0	11.0	11.0	11.0	11.0	11.0	11.0	11.1	11.1	11.1	11.2
G164.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.2	11.2
G165.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.2	11.1	11.2
G166.0	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.3	11.3
G167.0	11.3	11.3	11.3	11.2	11.2	11.2	11.2	11.3	11.3	11.3
G168.0	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.4	11.4
G169.0	11.4	11.4	11.4	11.4	11.4	11.4	11.3	11.4	11.4	11.4
G170.0	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4
G171.0	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5
G172.0	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.6
G173.0	11.6	11.6	11.5	11.5	11.5	11.5	11.6	11.6	11.6	11.6
G174.0	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6
G175.0	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6
G176.0	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6
G177.0	11.7	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6
G178.0	11.7	11.7	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6
G179.0	11.7	11.7	11.6	11.7	11.7	11.6	11.6	11.6	11.7	11.6
G180.0	11.7	11.7	11.7	11.7	11.7	11.6	11.6	11.6	11.7	11.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	1557.4	1557.6	1557.3	1557.6	1557.7	1558.1	1551.2	1550.7	1549.7	1549.3
G1.0	1560.1	1560.7	1560.5	1560.7	1561.3	1561.6	1555.7	1555.2	1554.0	1553.5
G2.0	1562.0	1562.8	1562.8	1563.4	1564.2	1564.1	1559.7	1559.0	1558.3	1557.4
G3.0	1563.6	1564.6	1565.1	1565.8	1566.8	1566.8	1563.1	1562.6	1561.9	1560.8
G4.0	1565.4	1566.6	1567.6	1568.5	1569.4	1569.6	1565.7	1565.8	1564.8	1563.7
G5.0	1566.7	1568.3	1569.4	1570.4	1571.5	1572.0	1568.4	1568.4	1567.4	1566.7
G6.0	1567.6	1569.2	1571.0	1572.0	1573.0	1573.8	1571.4	1571.6	1570.3	1569.4
G7.0	1567.6	1569.4	1571.3	1572.4	1574.0	1574.4	1574.3	1574.3	1573.1	1572.0
G8.0	1567.1	1569.3	1571.7	1572.9	1574.8	1575.6	1576.2	1576.0	1575.5	1574.1
G9.0	1566.4	1569.3	1571.9	1573.8	1575.4	1576.4	1577.0	1577.1	1576.5	1575.2
G10.0	1565.6	1568.8	1571.8	1573.8	1575.6	1576.7	1578.1	1577.9	1577.6	1575.9
G11.0	1564.3	1567.9	1571.0	1573.3	1575.4	1576.8	1579.3	1579.3	1578.9	1577.0
G12.0	1562.6	1566.7	1570.1	1572.9	1575.0	1576.3	1580.1	1579.8	1579.4	1577.7
G13.0	1560.5	1565.0	1569.3	1572.0	1575.1	1576.5	1580.2	1580.2	1579.4	1578.0
G14.0	1558.5	1563.9	1568.7	1571.8	1575.1	1576.8	1580.1	1580.1	1579.5	1577.6
G15.0	1556.8	1562.8	1567.7	1571.7	1575.2	1577.0	1580.4	1580.8	1579.5	1578.0
G16.0	1554.9	1561.4	1567.4	1571.8	1575.6	1577.7	1580.5	1580.7	1579.9	1577.8
G17.0	1552.7	1560.2	1566.9	1572.2	1576.9	1578.8	1581.0	1581.2	1580.4	1577.8
G18.0	1551.1	1559.6	1566.9	1573.6	1578.2	1581.0	1582.1	1582.1	1581.1	1578.0
G19.0	1549.8	1559.3	1567.8	1574.8	1580.2	1583.3	1583.7	1583.5	1582.1	1578.8
G20.0	1548.7	1559.5	1568.9	1576.1	1581.8	1584.8	1585.8	1586.0	1584.2	1580.3
G21.0	1547.8	1559.7	1569.7	1577.4	1583.0	1586.9	1588.3	1588.6	1586.5	1582.1
G22.0	1547.0	1559.3	1570.0	1578.3	1584.0	1587.8	1590.3	1590.6	1588.5	1584.2
G23.0	1545.8	1558.6	1569.6	1578.3	1584.7	1589.5	1592.2	1592.5	1590.5	1585.5
G24.0	1544.6	1557.6	1569.3	1579.3	1586.3	1591.6	1593.8	1594.4	1592.1	1586.8
G25.0	1542.2	1556.7	1570.0	1580.3	1587.8	1593.2	1595.1	1595.4	1593.1	1587.7
G26.0	1540.1	1556.3	1570.4	1581.2	1589.2	1595.3	1597.4	1597.7	1595.1	1589.0
G27.0	1538.7	1555.7	1570.5	1582.1	1590.7	1596.8	1599.5	1600.0	1597.3	1590.7
G28.0	1537.1	1555.0	1570.7	1583.0	1592.7	1599.4	1601.7	1602.3	1598.7	1591.9
G29.0	1535.4	1554.2	1571.0	1584.8	1594.9	1602.3	1603.6	1604.0	1600.3	1593.5
G30.0	1533.7	1554.0	1572.1	1586.7	1597.6	1605.4	1606.0	1606.4	1602.8	1594.8
G31.0	1532.3	1554.2	1573.0	1588.3	1599.9	1607.9	1609.6	1609.6	1605.1	1597.0
G32.0	1531.7	1554.2	1574.1	1590.0	1601.9	1610.2	1613.0	1612.5	1608.3	1599.5
G33.0	1530.3	1554.4	1574.8	1591.2	1603.9	1612.5	1616.0	1615.6	1611.0	1601.7
G34.0	1529.5	1554.0	1575.4	1592.8	1606.4	1615.9	1618.3	1618.0	1613.6	1604.0
G35.0	1528.3	1553.5	1576.5	1595.6	1610.6	1620.9	1621.2	1620.9	1615.5	1606.0
G36.0	1526.7	1554.1	1578.9	1600.3	1616.7	1628.5	1625.2	1624.4	1618.8	1608.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	1525.5	1555.7	1583.2	1606.4	1624.7	1637.1	1631.2	1630.3	1623.4	1611.4
G38.0	1525.8	1558.7	1589.0	1614.7	1634.3	1647.2	1638.6	1637.8	1630.0	1616.6
G39.0	1527.4	1563.3	1595.7	1623.2	1644.3	1658.2	1648.8	1647.2	1638.1	1623.4
G40.0	1530.6	1569.2	1604.3	1633.3	1656.1	1670.4	1659.3	1657.5	1648.3	1632.2
G41.0	1534.9	1576.3	1613.8	1644.5	1667.8	1682.3	1670.8	1669.3	1659.0	1641.9
G42.0	1540.5	1584.8	1623.9	1655.6	1679.2	1695.4	1683.7	1681.8	1671.2	1652.7
G43.0	1547.6	1594.6	1634.0	1667.0	1690.8	1706.2	1697.5	1694.4	1684.3	1664.9
G44.0	1555.5	1603.1	1644.6	1676.3	1698.8	1713.8	1709.6	1707.5	1696.4	1676.6
G45.0	1563.4	1612.2	1651.2	1682.0	1704.8	1720.1	1719.7	1718.3	1708.0	1688.8
G46.0	1571.2	1617.9	1656.2	1687.3	1709.9	1725.5	1726.6	1725.4	1715.6	1697.3
G47.0	1576.1	1621.0	1660.5	1692.9	1716.8	1732.4	1732.6	1731.7	1721.8	1703.4
G48.0	1578.4	1625.4	1665.9	1700.3	1724.7	1740.4	1739.1	1737.7	1727.4	1708.6
G49.0	1581.8	1630.4	1673.0	1707.3	1731.4	1746.4	1747.1	1745.3	1734.2	1714.0
G50.0	1586.0	1636.6	1678.8	1711.1	1732.7	1746.7	1754.7	1753.2	1742.0	1721.4
G51.0	1591.3	1641.5	1680.2	1708.3	1726.6	1739.5	1758.6	1757.0	1747.9	1728.3
G52.0	1595.6	1641.4	1675.0	1699.9	1717.8	1730.1	1755.2	1754.3	1747.7	1731.8
G53.0	1594.9	1634.5	1665.5	1690.9	1709.6	1722.3	1746.2	1745.2	1740.5	1727.9
G54.0	1587.9	1624.8	1657.0	1683.0	1702.1	1715.1	1737.9	1736.6	1730.7	1718.0
G55.0	1577.9	1616.0	1648.6	1675.5	1694.2	1706.9	1729.6	1728.0	1722.2	1709.1
G56.0	1568.8	1607.0	1639.9	1666.3	1685.8	1699.2	1721.9	1720.1	1713.6	1700.3
G57.0	1558.6	1597.1	1630.7	1658.3	1677.3	1689.8	1713.6	1711.2	1705.1	1691.4
G58.0	1547.4	1587.4	1621.6	1646.4	1664.3	1677.0	1705.4	1702.9	1696.1	1682.2
G59.0	1535.8	1576.5	1608.9	1633.5	1650.0	1661.2	1692.8	1690.9	1686.6	1673.1
G60.0	1525.1	1563.9	1595.1	1615.8	1630.2	1639.4	1678.3	1677.5	1673.7	1660.9
G61.0	1512.2	1548.8	1574.6	1591.2	1602.8	1610.9	1659.0	1659.2	1657.7	1646.9
G62.0	1497.3	1525.3	1546.4	1558.6	1567.4	1574.7	1633.0	1634.4	1635.7	1627.5
G63.0	1473.5	1495.1	1510.7	1516.1	1522.2	1526.1	1598.9	1600.1	1604.5	1601.2
G64.0	1443.6	1455.2	1461.9	1466.2	1470.2	1473.8	1556.2	1557.6	1565.1	1566.4
G65.0	1401.0	1403.7	1409.5	1409.3	1413.7	1418.4	1504.5	1505.8	1516.2	1520.4
G66.0	1349.2	1348.0	1351.1	1357.5	1366.8	1375.1	1449.2	1450.3	1461.8	1467.2
G67.0	1289.4	1290.6	1304.9	1318.8	1333.3	1342.7	1398.9	1400.9	1404.4	1407.4
G68.0	1230.8	1248.9	1272.1	1292.4	1308.3	1318.7	1362.7	1361.6	1360.9	1357.6
G69.0	1192.0	1220.2	1248.0	1270.2	1286.7	1299.3	1335.7	1334.9	1330.6	1321.7
G70.0	1164.0	1198.1	1228.3	1252.0	1269.4	1282.2	1314.0	1312.1	1307.5	1295.5
G71.0	1142.2	1178.9	1210.8	1235.9	1254.3	1266.7	1295.5	1293.9	1287.2	1274.3
G72.0	1124.7	1162.4	1195.9	1221.8	1241.0	1252.8	1280.1	1277.4	1270.7	1256.5
G73.0	1108.8	1148.3	1182.4	1209.2	1229.1	1241.2	1265.3	1263.4	1255.6	1240.5

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: LSG-1600B
Distance: 8.140 m
Humidity:
Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	1094.7	1136.1	1170.9	1198.1	1218.4	1231.1	1253.2	1250.4	1242.7	1226.5
G75.0	1082.5	1125.1	1161.0	1189.1	1210.0	1222.9	1242.6	1240.1	1231.1	1214.7
G76.0	1072.0	1116.0	1152.9	1181.7	1202.7	1215.7	1233.8	1231.5	1222.2	1204.4
G77.0	1063.3	1107.3	1144.9	1174.0	1194.8	1207.7	1226.9	1223.8	1214.2	1195.8
G78.0	1054.9	1098.7	1136.5	1165.7	1185.9	1198.0	1218.4	1215.5	1206.2	1188.1
G79.0	1045.4	1089.2	1127.2	1155.1	1174.3	1185.7	1208.5	1206.5	1197.6	1179.3
G80.0	1034.6	1077.1	1113.3	1140.9	1158.2	1169.0	1197.3	1195.6	1188.0	1169.9
G81.0	1019.8	1060.0	1092.4	1118.6	1136.5	1145.8	1180.9	1182.0	1175.9	1158.4
G82.0	995.5	1037.0	1066.6	1088.2	1107.8	1118.0	1158.8	1160.3	1159.6	1142.7
G83.0	963.0	1008.3	1034.8	1054.4	1074.5	1086.0	1131.0	1133.3	1135.6	1120.3
G84.0	928.1	976.2	999.7	1017.0	1034.9	1049.8	1099.5	1100.3	1106.0	1092.6
G85.0	861.8	889.5	908.0	910.5	923.2	940.6	1063.9	1065.9	1070.5	1060.7
G86.0	649.0	657.3	665.4	662.9	681.7	699.1	975.1	977.8	998.0	998.7
G87.0	354.8	360.1	371.6	367.1	379.6	401.4	743.5	753.9	783.3	805.0
G88.0	116.8	126.6	132.4	131.5	141.6	154.7	437.5	448.0	480.8	488.6
G89.0	17.8	20.0	21.8	22.8	26.4	29.6	182.7	184.7	201.9	210.1
G90.0	9.9	10.4	11.0	11.3	11.6	11.9	39.4	37.7	44.4	44.6
G91.0	6.0	6.6	7.3	7.5	8.0	8.3	11.7	11.7	12.0	11.9
G92.0	4.5	4.7	4.9	5.1	5.2	5.4	8.5	8.5	8.5	8.7
G93.0	4.3	4.4	4.5	4.6	4.6	4.6	5.4	5.4	5.4	5.4
G94.0	4.4	4.5	4.6	4.6	4.6	4.6	4.4	4.4	4.5	4.5
G95.0	4.6	4.6	4.7	4.7	4.7	4.6	4.4	4.4	4.4	4.5
G96.0	4.8	4.8	4.9	4.9	4.9	4.9	4.6	4.6	4.6	4.6
G97.0	4.9	5.0	5.0	5.1	5.1	5.0	4.8	4.8	4.8	4.9
G98.0	5.1	5.2	5.2	5.2	5.2	5.2	5.0	5.0	5.1	5.1
G99.0	5.3	5.4	5.4	5.4	5.4	5.4	5.2	5.2	5.3	5.3
G100.0	5.5	5.6	5.6	5.7	5.7	5.6	5.4	5.4	5.4	5.5
G101.0	5.7	5.8	5.9	5.9	5.9	5.9	5.6	5.6	5.7	5.7
G102.0	5.9	6.0	6.1	6.2	6.2	6.2	5.9	5.9	5.9	6.0
G103.0	6.1	6.3	6.3	6.4	6.4	6.4	6.1	6.1	6.2	6.2
G104.0	6.3	6.4	6.5	6.6	6.6	6.7	6.3	6.4	6.4	6.4
G105.0	6.5	6.6	6.7	6.8	6.8	6.9	6.6	6.6	6.6	6.7
G106.0	6.6	6.8	6.9	7.0	7.0	7.1	6.8	6.8	6.9	6.9
G107.0	6.8	7.0	7.1	7.1	7.2	7.2	7.0	7.0	7.0	7.0
G108.0	7.1	7.2	7.3	7.3	7.3	7.3	7.2	7.2	7.2	7.2
G109.0	7.3	7.4	7.4	7.5	7.6	7.6	7.3	7.3	7.3	7.4
G110.0	7.5	7.6	7.7	7.8	7.8	7.9	7.6	7.6	7.6	7.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	7.7	7.8	7.9	8.0	8.1	8.1	7.8	7.8	7.8	7.8
G112.0	7.9	8.0	8.1	8.2	8.3	8.3	8.1	8.1	8.1	8.1
G113.0	8.1	8.2	8.3	8.4	8.5	8.5	8.3	8.3	8.3	8.3
G114.0	8.2	8.3	8.4	8.6	8.6	8.7	8.5	8.5	8.5	8.4
G115.0	8.3	8.5	8.6	8.7	8.8	8.9	8.7	8.7	8.6	8.6
G116.0	8.5	8.7	8.8	8.9	9.0	9.1	8.9	8.8	8.8	8.8
G117.0	8.6	8.7	9.0	9.1	9.1	9.2	8.9	9.0	9.0	9.0
G118.0	8.8	9.0	9.1	9.2	9.3	9.3	9.2	9.1	9.1	9.1
G119.0	9.0	9.1	9.2	9.4	9.5	9.5	9.4	9.3	9.3	9.3
G120.0	9.1	9.3	9.4	9.5	9.6	9.7	9.5	9.5	9.5	9.5
G121.0	9.2	9.4	9.5	9.7	9.8	9.8	9.7	9.7	9.7	9.6
G122.0	9.4	9.6	9.7	9.8	9.9	9.9	9.9	9.9	9.8	9.8
G123.0	9.5	9.7	9.8	9.9	10.1	10.1	10.0	10.0	9.9	9.9
G124.0	9.6	9.8	9.9	10.1	10.2	10.2	10.1	10.1	10.1	10.1
G125.0	9.8	9.9	10.1	10.2	10.3	10.3	10.3	10.3	10.2	10.2
G126.0	9.8	10.0	10.1	10.3	10.4	10.4	10.4	10.4	10.4	10.3
G127.0	9.9	10.1	10.2	10.3	10.5	10.5	10.5	10.5	10.5	10.4
G128.0	9.9	10.1	10.2	10.4	10.5	10.6	10.6	10.6	10.6	10.5
G129.0	10.0	10.2	10.3	10.5	10.6	10.6	10.6	10.6	10.6	10.5
G130.0	10.1	10.2	10.3	10.5	10.6	10.7	10.7	10.7	10.6	10.6
G131.0	10.1	10.3	10.4	10.5	10.6	10.7	10.7	10.7	10.7	10.6
G132.0	10.2	10.3	10.4	10.6	10.7	10.7	10.8	10.7	10.7	10.6
G133.0	10.2	10.4	10.5	10.6	10.7	10.8	10.8	10.8	10.8	10.6
G134.0	10.3	10.5	10.5	10.6	10.7	10.8	10.8	10.8	10.7	10.7
G135.0	10.3	10.5	10.6	10.7	10.7	10.8	10.8	10.8	10.7	10.7
G136.0	10.4	10.6	10.6	10.7	10.8	10.8	10.9	10.8	10.8	10.7
G137.0	10.5	10.6	10.7	10.7	10.8	10.8	10.9	10.8	10.8	10.8
G138.0	10.5	10.7	10.8	10.7	10.8	10.9	10.9	10.8	10.8	10.8
G139.0	10.6	10.7	10.8	10.8	10.8	10.9	10.9	10.9	10.8	10.9
G140.0	10.6	10.8	10.8	10.8	10.9	10.9	10.9	10.9	10.9	10.9
G141.0	10.7	10.8	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9
G142.0	10.7	10.9	10.9	10.9	10.9	10.9	11.0	10.9	10.9	11.0
G143.0	10.8	10.9	10.9	10.9	10.9	10.9	11.0	10.9	10.9	10.9
G144.0	10.8	10.9	11.0	10.9	10.9	10.9	11.0	11.0	11.0	11.0
G145.0	10.9	10.9	11.0	11.0	10.9	11.0	11.0	11.0	11.0	11.0
G146.0	10.9	10.9	11.0	11.0	11.0	10.9	11.1	11.0	11.0	11.1
G147.0	10.9	11.0	11.0	11.0	11.0	11.0	11.1	11.0	11.1	11.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	10.9	11.0	11.1	11.1	11.0	11.0	11.1	11.1	11.1	11.1
G149.0	11.0	11.0	11.1	11.1	11.0	11.0	11.1	11.1	11.2	11.1
G150.0	11.0	11.1	11.1	11.1	11.0	11.0	11.1	11.1	11.2	11.2
G151.0	11.0	11.1	11.1	11.2	11.1	11.0	11.1	11.1	11.2	11.2
G152.0	11.0	11.1	11.1	11.2	11.1	11.0	11.2	11.1	11.2	11.2
G153.0	11.1	11.1	11.1	11.2	11.1	11.0	11.2	11.2	11.2	11.2
G154.0	11.1	11.1	11.2	11.2	11.1	11.0	11.2	11.2	11.2	11.2
G155.0	11.1	11.1	11.2	11.2	11.1	11.0	11.2	11.2	11.2	11.2
G156.0	11.1	11.1	11.2	11.2	11.1	11.0	11.2	11.2	11.2	11.2
G157.0	11.1	11.2	11.2	11.2	11.1	11.0	11.2	11.2	11.2	11.2
G158.0	11.1	11.2	11.2	11.2	11.2	11.0	11.2	11.2	11.2	11.2
G159.0	11.1	11.2	11.2	11.2	11.2	11.0	11.1	11.2	11.2	11.2
G160.0	11.1	11.2	11.2	11.2	11.2	11.0	11.1	11.2	11.2	11.2
G161.0	11.2	11.2	11.2	11.2	11.2	11.0	11.1	11.3	11.2	11.2
G162.0	11.2	11.2	11.2	11.2	11.2	11.0	11.1	11.2	11.2	11.2
G163.0	11.2	11.2	11.3	11.2	11.2	11.0	11.1	11.2	11.2	11.2
G164.0	11.3	11.3	11.3	11.3	11.2	11.1	11.2	11.2	11.3	11.3
G165.0	11.3	11.3	11.3	11.3	11.3	11.1	11.2	11.3	11.3	11.3
G166.0	11.3	11.3	11.4	11.4	11.3	11.2	11.2	11.3	11.3	11.3
G167.0	11.4	11.4	11.4	11.4	11.4	11.2	11.3	11.4	11.4	11.3
G168.0	11.4	11.4	11.5	11.5	11.4	11.3	11.3	11.4	11.4	11.3
G169.0	11.4	11.5	11.5	11.5	11.5	11.4	11.4	11.5	11.5	11.4
G170.0	11.4	11.5	11.5	11.5	11.5	11.4	11.4	11.5	11.5	11.4
G171.0	11.5	11.5	11.6	11.6	11.6	11.5	11.5	11.6	11.5	11.4
G172.0	11.5	11.6	11.6	11.6	11.6	11.6	11.5	11.6	11.6	11.4
G173.0	11.6	11.6	11.6	11.6	11.7	11.6	11.6	11.6	11.6	11.5
G174.0	11.6	11.6	11.6	11.7	11.7	11.7	11.7	11.7	11.6	11.5
G175.0	11.6	11.6	11.7	11.7	11.7	11.7	11.7	11.7	11.6	11.5
G176.0	11.6	11.6	11.7	11.7	11.7	11.8	11.8	11.7	11.6	11.5
G177.0	11.6	11.6	11.6	11.7	11.7	11.7	11.8	11.7	11.6	11.5
G178.0	11.6	11.6	11.6	11.7	11.7	11.7	11.8	11.7	11.6	11.5
G179.0	11.6	11.6	11.6	11.6	11.7	11.7	11.9	11.6	11.6	11.6
G180.0	11.6	11.6	11.6	11.6	11.6	11.7	11.9	11.7	11.6	11.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	1548.9	1549.0	1548.8	1549.3	1549.0	1550.2	1550.3	1550.2	1550.5	1550.9
G1.0	1553.1	1552.8	1552.5	1553.0	1552.5	1553.6	1553.3	1553.0	1553.1	1553.1
G2.0	1557.2	1556.7	1556.1	1556.4	1555.7	1556.3	1556.0	1555.5	1555.4	1555.0
G3.0	1560.4	1560.2	1559.6	1559.3	1558.7	1559.1	1558.2	1557.5	1557.1	1556.4
G4.0	1563.6	1563.1	1562.4	1561.6	1560.8	1561.0	1559.8	1558.9	1558.4	1557.3
G5.0	1566.3	1565.4	1564.6	1563.5	1562.7	1562.3	1561.0	1559.8	1559.2	1557.5
G6.0	1568.7	1567.9	1566.5	1565.5	1564.2	1563.5	1561.9	1560.0	1559.1	1557.2
G7.0	1571.2	1569.9	1568.6	1567.2	1565.0	1564.3	1562.6	1560.1	1558.5	1556.6
G8.0	1573.2	1571.8	1570.3	1568.6	1566.3	1565.0	1562.9	1559.8	1558.0	1555.5
G9.0	1574.3	1572.8	1571.2	1569.5	1567.3	1565.3	1562.5	1559.1	1557.0	1553.9
G10.0	1574.9	1573.1	1571.5	1569.5	1567.3	1565.2	1562.2	1558.4	1555.6	1551.8
G11.0	1576.1	1574.1	1571.7	1569.1	1566.5	1564.6	1561.1	1557.4	1553.6	1549.5
G12.0	1576.7	1574.5	1571.9	1568.8	1565.6	1563.2	1559.7	1555.2	1551.6	1546.4
G13.0	1576.6	1574.3	1571.5	1568.3	1564.7	1561.1	1557.2	1552.3	1548.4	1543.3
G14.0	1576.1	1573.7	1570.6	1567.3	1563.4	1559.1	1554.4	1549.1	1544.8	1539.8
G15.0	1576.1	1573.0	1569.2	1565.7	1561.3	1557.0	1551.6	1545.8	1541.0	1535.6
G16.0	1575.6	1572.1	1568.5	1563.6	1558.8	1554.3	1548.6	1541.8	1535.9	1530.7
G17.0	1575.2	1571.7	1567.1	1561.7	1556.1	1550.9	1545.0	1537.7	1530.7	1525.1
G18.0	1575.1	1570.7	1565.4	1559.6	1553.3	1547.4	1540.8	1532.9	1525.3	1518.4
G19.0	1575.2	1570.2	1564.0	1557.5	1550.3	1543.2	1536.1	1528.0	1519.5	1511.9
G20.0	1575.9	1569.5	1562.8	1555.3	1547.1	1539.3	1531.0	1522.1	1513.6	1504.8
G21.0	1576.9	1570.4	1562.1	1553.2	1544.1	1534.9	1525.7	1515.9	1506.7	1497.1
G22.0	1578.4	1570.8	1560.9	1551.6	1540.7	1530.3	1520.2	1509.2	1499.3	1489.5
G23.0	1579.9	1572.1	1560.5	1550.0	1537.7	1525.8	1514.5	1502.2	1491.8	1481.2
G24.0	1580.7	1572.6	1561.2	1548.7	1534.6	1521.3	1508.2	1495.3	1483.4	1472.4
G25.0	1581.0	1572.7	1560.4	1547.7	1532.1	1516.8	1502.3	1488.0	1475.3	1463.2
G26.0	1581.2	1572.3	1559.9	1545.8	1529.7	1512.6	1496.5	1480.4	1466.0	1453.3
G27.0	1582.4	1571.4	1558.7	1543.5	1527.3	1508.6	1490.2	1472.5	1457.1	1442.9
G28.0	1583.3	1571.8	1557.3	1541.4	1523.7	1504.3	1483.9	1464.4	1447.4	1432.2
G29.0	1584.3	1572.0	1556.7	1538.6	1520.3	1499.5	1477.9	1456.4	1437.4	1420.9
G30.0	1585.2	1572.2	1555.8	1536.7	1516.2	1494.5	1471.5	1448.3	1426.9	1408.9
G31.0	1586.2	1572.1	1554.4	1534.4	1512.3	1489.0	1465.7	1440.2	1417.3	1397.1
G32.0	1587.9	1572.0	1552.9	1532.2	1508.9	1483.9	1458.6	1431.4	1406.5	1384.4
G33.0	1589.7	1572.7	1552.2	1529.7	1505.4	1477.6	1451.3	1423.0	1395.5	1371.7
G34.0	1591.7	1573.8	1551.8	1527.5	1501.2	1472.3	1443.9	1414.1	1384.3	1358.9
G35.0	1592.9	1574.7	1551.5	1525.1	1496.8	1466.7	1436.5	1405.1	1373.0	1345.2
G36.0	1594.1	1575.7	1551.1	1523.6	1492.7	1460.8	1428.4	1395.2	1361.5	1331.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	1595.6	1575.8	1551.0	1522.2	1489.2	1455.0	1420.8	1385.0	1350.5	1317.8
G38.0	1598.6	1576.7	1550.3	1520.3	1486.1	1448.8	1412.7	1374.2	1338.7	1304.0
G39.0	1603.5	1578.6	1549.8	1518.2	1482.6	1443.5	1404.5	1364.5	1326.2	1289.4
G40.0	1610.4	1582.3	1549.9	1515.9	1479.1	1438.6	1396.3	1354.1	1313.3	1275.0
G41.0	1618.5	1587.6	1551.6	1514.1	1474.8	1432.7	1388.6	1343.7	1300.1	1260.2
G42.0	1627.7	1593.9	1555.4	1513.5	1471.1	1427.4	1380.9	1333.2	1287.0	1244.9
G43.0	1637.8	1602.1	1560.2	1514.9	1468.1	1421.7	1373.2	1322.4	1273.7	1229.6
G44.0	1648.5	1610.9	1566.3	1517.2	1465.8	1416.5	1365.5	1312.2	1261.2	1213.8
G45.0	1659.0	1620.4	1573.3	1521.2	1465.2	1411.6	1358.1	1302.4	1248.3	1196.6
G46.0	1670.0	1630.2	1581.2	1526.4	1466.3	1407.5	1350.9	1293.6	1235.6	1181.5
G47.0	1676.9	1639.3	1589.7	1532.3	1468.7	1404.3	1344.0	1283.8	1223.1	1165.1
G48.0	1681.7	1645.5	1597.2	1539.6	1472.1	1403.0	1337.7	1274.9	1211.3	1150.0
G49.0	1686.4	1649.0	1603.1	1545.6	1476.3	1402.8	1332.5	1266.0	1200.0	1135.4
G50.0	1691.7	1652.4	1605.5	1551.4	1481.1	1403.9	1328.2	1256.9	1188.7	1120.9
G51.0	1698.6	1657.0	1608.7	1554.0	1485.1	1406.4	1325.3	1248.6	1175.9	1106.4
G52.0	1704.5	1662.8	1612.4	1554.6	1488.4	1409.2	1323.9	1241.5	1165.5	1092.7
G53.0	1705.4	1667.9	1617.6	1557.1	1488.2	1412.1	1323.9	1235.0	1154.6	1078.1
G54.0	1699.7	1668.1	1621.9	1560.1	1487.6	1413.2	1325.1	1230.4	1143.6	1063.7
G55.0	1689.2	1661.3	1622.4	1563.5	1489.0	1412.1	1326.1	1226.8	1133.7	1048.8
G56.0	1679.6	1651.1	1616.6	1565.1	1490.1	1409.7	1325.8	1224.3	1124.4	1033.8
G57.0	1670.6	1641.3	1605.8	1560.8	1492.2	1409.7	1324.3	1222.7	1115.4	1018.6
G58.0	1661.3	1631.2	1595.8	1550.3	1491.7	1410.6	1320.5	1220.9	1108.1	1004.3
G59.0	1651.2	1620.7	1585.1	1539.1	1485.2	1411.1	1317.5	1217.8	1100.8	990.2
G60.0	1640.8	1609.9	1573.9	1527.6	1475.1	1408.5	1316.2	1213.3	1093.4	977.5
G61.0	1626.9	1599.3	1561.9	1516.1	1464.5	1401.5	1315.1	1206.6	1086.9	966.3
G62.0	1612.1	1586.2	1550.5	1503.0	1451.9	1391.0	1311.2	1200.0	1080.9	956.5
G63.0	1589.9	1570.2	1537.3	1491.3	1438.5	1379.4	1306.1	1193.2	1075.0	948.5
G64.0	1561.0	1547.2	1522.7	1479.5	1424.6	1365.3	1295.1	1186.5	1068.1	941.4
G65.0	1521.9	1516.4	1498.8	1465.9	1412.7	1350.1	1281.9	1179.6	1061.4	935.0
G66.0	1474.3	1476.5	1468.9	1443.3	1400.6	1334.3	1263.7	1171.1	1054.5	929.9
G67.0	1414.4	1424.0	1426.3	1415.3	1381.8	1322.4	1243.6	1158.6	1048.4	922.7
G68.0	1358.2	1365.8	1373.1	1375.9	1356.9	1308.1	1223.7	1143.3	1042.9	914.7
G69.0	1311.6	1303.3	1309.7	1322.9	1321.6	1284.8	1208.5	1123.3	1034.9	903.9
G70.0	1280.8	1263.9	1251.3	1258.1	1273.4	1253.9	1193.1	1105.3	1022.0	894.7
G71.0	1256.3	1234.0	1209.0	1194.8	1206.2	1211.0	1168.8	1092.0	1002.4	886.8
G72.0	1237.0	1211.6	1181.4	1150.4	1136.2	1147.0	1138.6	1077.3	982.4	880.9
G73.0	1219.6	1192.3	1158.7	1122.6	1084.8	1072.1	1094.0	1055.3	963.7	867.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	1204.9	1175.9	1140.3	1100.2	1052.7	1007.1	1027.0	1026.6	949.2	846.6
G75.0	1191.2	1161.6	1124.0	1081.4	1026.3	972.1	945.0	976.7	929.7	823.8
G76.0	1180.5	1149.2	1110.2	1064.4	1005.4	946.8	897.2	902.2	903.2	803.5
G77.0	1170.8	1138.1	1098.0	1049.7	987.0	927.4	868.1	821.6	856.9	782.0
G78.0	1162.7	1128.3	1086.9	1035.7	972.1	910.8	847.1	782.6	770.9	756.7
G79.0	1153.7	1119.6	1077.7	1022.4	958.8	896.0	828.6	758.3	687.5	719.9
G80.0	1143.2	1109.7	1068.3	1010.2	948.0	883.0	813.6	738.6	654.7	632.2
G81.0	1131.3	1098.3	1056.0	996.8	936.6	871.8	800.0	719.5	632.1	556.2
G82.0	1115.9	1083.2	1041.3	981.7	924.3	860.2	788.1	701.6	614.9	529.3
G83.0	1093.6	1061.1	1017.6	962.9	909.0	846.4	772.5	686.0	599.6	509.8
G84.0	1064.6	1028.5	984.4	936.3	888.2	825.7	754.0	672.0	585.2	489.5
G85.0	1032.5	992.1	947.0	904.4	850.9	798.3	733.5	651.4	567.3	472.7
G86.0	982.8	941.8	910.5	868.1	811.1	764.0	699.7	623.5	544.5	453.9
G87.0	803.3	792.0	801.0	786.1	757.8	722.5	661.4	587.3	516.0	432.2
G88.0	505.7	514.2	522.0	535.6	565.0	576.7	570.3	540.8	482.4	399.5
G89.0	218.1	227.6	232.3	251.5	276.0	298.5	325.0	339.2	359.8	344.4
G90.0	51.1	53.3	51.8	54.7	61.0	66.2	76.2	85.3	100.8	117.4
G91.0	11.9	11.4	11.3	10.8	10.5	10.2	9.8	9.3	8.6	7.5
G92.0	8.5	8.1	7.9	7.4	6.9	6.3	5.6	4.7	3.7	2.9
G93.0	5.3	5.1	4.8	4.4	4.2	3.9	3.5	3.3	2.9	2.6
G94.0	4.5	4.4	4.3	4.2	3.9	3.8	3.6	3.4	3.1	2.7
G95.0	4.5	4.4	4.4	4.3	4.2	4.0	3.8	3.5	3.2	2.9
G96.0	4.7	4.6	4.6	4.5	4.4	4.2	3.9	3.7	3.4	3.0
G97.0	4.9	4.9	4.8	4.7	4.5	4.4	4.1	3.8	3.5	3.2
G98.0	5.1	5.0	4.9	4.8	4.7	4.5	4.3	4.0	3.7	3.4
G99.0	5.3	5.2	5.1	5.0	4.9	4.7	4.4	4.2	3.8	3.5
G100.0	5.5	5.4	5.4	5.3	5.1	4.9	4.6	4.3	4.0	3.6
G101.0	5.7	5.6	5.6	5.4	5.3	5.1	4.8	4.5	4.2	3.8
G102.0	5.9	5.9	5.8	5.7	5.4	5.3	5.0	4.7	4.4	4.0
G103.0	6.2	6.1	6.0	5.9	5.6	5.4	5.2	4.8	4.5	4.2
G104.0	6.4	6.3	6.2	6.1	5.9	5.6	5.3	5.0	4.7	4.3
G105.0	6.6	6.5	6.4	6.2	6.0	5.8	5.5	5.2	4.8	4.5
G106.0	6.8	6.7	6.5	6.4	6.2	6.0	5.7	5.4	5.0	4.6
G107.0	6.9	6.9	6.7	6.6	6.4	6.1	5.9	5.5	5.2	4.8
G108.0	7.2	7.1	7.0	6.8	6.6	6.3	6.1	5.7	5.4	5.0
G109.0	7.3	7.3	7.1	7.0	6.8	6.5	6.2	5.9	5.5	5.2
G110.0	7.6	7.4	7.3	7.2	7.0	6.7	6.4	6.1	5.7	5.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	7.8	7.7	7.6	7.4	7.2	6.9	6.6	6.3	5.8	5.5
G112.0	8.0	7.9	7.8	7.6	7.3	7.1	6.7	6.3	6.0	5.7
G113.0	8.3	8.1	8.0	7.8	7.5	7.3	6.9	6.5	6.2	5.8
G114.0	8.4	8.3	8.1	7.9	7.7	7.4	7.1	6.7	6.3	6.0
G115.0	8.5	8.4	8.3	8.1	7.9	7.5	7.2	6.9	6.5	6.2
G116.0	8.7	8.6	8.4	8.3	8.0	7.7	7.4	7.0	6.7	6.3
G117.0	8.9	8.8	8.6	8.4	8.1	7.9	7.5	7.2	6.8	6.5
G118.0	9.1	9.0	8.8	8.6	8.3	8.1	7.7	7.3	7.0	6.7
G119.0	9.2	9.1	9.0	8.8	8.5	8.3	7.9	7.5	7.2	6.9
G120.0	9.4	9.3	9.1	8.9	8.7	8.3	8.0	7.7	7.3	7.1
G121.0	9.5	9.4	9.3	9.1	8.8	8.5	8.2	7.9	7.5	7.3
G122.0	9.7	9.6	9.4	9.2	9.0	8.7	8.3	8.0	7.7	7.4
G123.0	9.9	9.8	9.6	9.4	9.1	8.8	8.5	8.1	7.9	7.5
G124.0	10.0	9.9	9.7	9.5	9.2	9.0	8.6	8.3	8.0	7.7
G125.0	10.1	10.0	9.9	9.6	9.4	9.1	8.8	8.4	8.1	7.9
G126.0	10.2	10.1	9.9	9.8	9.5	9.2	8.9	8.5	8.3	8.0
G127.0	10.3	10.2	10.1	9.9	9.6	9.3	9.0	8.7	8.4	8.1
G128.0	10.4	10.3	10.1	9.9	9.7	9.4	9.1	8.8	8.5	8.3
G129.0	10.5	10.3	10.2	9.9	9.7	9.5	9.1	8.9	8.6	8.4
G130.0	10.5	10.4	10.3	10.1	9.8	9.5	9.3	9.0	8.7	8.5
G131.0	10.5	10.4	10.3	10.1	9.9	9.6	9.4	9.1	8.9	8.6
G132.0	10.6	10.5	10.3	10.2	9.9	9.7	9.4	9.2	9.0	8.8
G133.0	10.6	10.5	10.4	10.2	10.0	9.8	9.5	9.3	9.1	8.8
G134.0	10.6	10.6	10.5	10.3	10.1	9.9	9.6	9.4	9.2	9.0
G135.0	10.7	10.6	10.5	10.3	10.1	9.9	9.7	9.5	9.3	9.1
G136.0	10.7	10.7	10.6	10.4	10.2	10.0	9.8	9.6	9.4	9.2
G137.0	10.7	10.7	10.6	10.5	10.3	10.1	9.9	9.7	9.5	9.2
G138.0	10.8	10.8	10.7	10.5	10.3	10.2	9.9	9.8	9.6	9.3
G139.0	10.8	10.8	10.7	10.6	10.4	10.2	10.1	9.9	9.6	9.4
G140.0	10.9	10.9	10.8	10.6	10.5	10.3	10.1	9.9	9.7	9.5
G141.0	10.9	10.9	10.8	10.7	10.6	10.4	10.2	10.0	9.8	9.5
G142.0	10.9	10.9	10.9	10.8	10.6	10.4	10.2	10.0	9.9	9.6
G143.0	11.0	11.0	10.9	10.8	10.7	10.5	10.3	10.1	9.9	9.7
G144.0	11.0	11.0	10.9	10.9	10.7	10.5	10.4	10.1	9.9	9.8
G145.0	11.1	11.1	11.0	10.9	10.8	10.6	10.4	10.2	10.0	9.9
G146.0	11.1	11.1	11.0	10.9	10.8	10.6	10.4	10.3	10.1	9.9
G147.0	11.1	11.1	11.1	11.0	10.9	10.7	10.5	10.3	10.1	10.0

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	11.1	11.1	11.1	11.0	10.9	10.7	10.5	10.4	10.2	10.1
G149.0	11.1	11.2	11.1	11.0	10.9	10.7	10.6	10.4	10.2	10.1
G150.0	11.1	11.2	11.2	11.0	10.9	10.8	10.6	10.4	10.3	10.2
G151.0	11.2	11.2	11.2	11.0	10.9	10.8	10.6	10.5	10.3	10.3
G152.0	11.2	11.3	11.2	11.1	10.9	10.8	10.7	10.5	10.4	10.3
G153.0	11.2	11.2	11.2	11.1	10.9	10.8	10.7	10.5	10.5	10.4
G154.0	11.2	11.2	11.2	11.1	10.9	10.8	10.7	10.6	10.5	10.4
G155.0	11.1	11.3	11.2	11.0	11.0	10.9	10.7	10.6	10.6	10.5
G156.0	11.2	11.3	11.2	11.1	11.0	10.9	10.8	10.7	10.6	10.6
G157.0	11.2	11.2	11.2	11.1	11.0	10.9	10.8	10.7	10.7	10.6
G158.0	11.3	11.3	11.1	11.1	11.0	10.8	10.9	10.8	10.7	10.7
G159.0	11.3	11.2	11.2	11.1	11.0	10.9	10.9	10.8	10.8	10.8
G160.0	11.3	11.2	11.2	11.1	11.0	10.9	10.9	10.9	10.8	10.8
G161.0	11.3	11.2	11.2	11.1	11.0	11.0	10.9	10.9	10.9	10.9
G162.0	11.3	11.2	11.2	11.1	11.1	11.0	10.9	10.9	10.9	10.9
G163.0	11.2	11.2	11.1	11.1	11.1	11.1	11.0	11.0	11.0	10.9
G164.0	11.3	11.2	11.2	11.2	11.2	11.1	11.1	11.0	11.0	11.0
G165.0	11.3	11.3	11.2	11.2	11.2	11.1	11.1	11.0	11.1	11.1
G166.0	11.3	11.3	11.3	11.3	11.2	11.2	11.2	11.1	11.1	11.1
G167.0	11.3	11.3	11.3	11.3	11.3	11.2	11.2	11.2	11.2	11.2
G168.0	11.3	11.3	11.3	11.3	11.3	11.3	11.2	11.2	11.2	11.2
G169.0	11.4	11.4	11.4	11.4	11.4	11.3	11.3	11.3	11.3	11.3
G170.0	11.4	11.4	11.4	11.4	11.4	11.4	11.3	11.3	11.3	11.3
G171.0	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.3	11.4
G172.0	11.5	11.5	11.5	11.5	11.4	11.4	11.5	11.4	11.5	11.4
G173.0	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5
G174.0	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5
G175.0	11.5	11.5	11.6	11.6	11.6	11.6	11.6	11.5	11.5	11.5
G176.0	11.6	11.5	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6
G177.0	11.5	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6
G178.0	11.5	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.5
G179.0	11.5	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6
G180.0	11.5	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	1551.3	1551.8	1552.2	1552.8	1553.1	1553.9	1554.0	1554.2	1555.0	1554.7
G1.0	1553.3	1553.4	1553.4	1553.6	1553.8	1554.2	1553.9	1553.9	1554.2	1553.7
G2.0	1554.8	1554.4	1554.1	1554.1	1553.8	1553.9	1553.4	1552.9	1552.9	1552.2
G3.0	1555.8	1555.3	1554.5	1554.0	1553.4	1553.2	1552.3	1551.5	1551.2	1550.1
G4.0	1555.9	1555.5	1554.2	1553.6	1552.4	1552.2	1550.8	1549.7	1548.9	1547.4
G5.0	1556.0	1555.2	1553.6	1552.4	1551.0	1550.3	1548.6	1547.2	1546.1	1544.4
G6.0	1555.7	1554.1	1552.4	1550.5	1548.8	1547.8	1546.0	1544.0	1542.9	1540.9
G7.0	1554.7	1552.9	1550.7	1548.3	1546.2	1545.0	1542.8	1540.5	1539.1	1536.9
G8.0	1553.1	1551.0	1548.4	1545.4	1543.1	1541.6	1538.9	1536.5	1534.7	1532.3
G9.0	1551.0	1548.4	1545.3	1542.3	1539.3	1537.7	1534.5	1531.7	1530.0	1527.6
G10.0	1548.9	1545.4	1542.0	1538.4	1535.0	1533.2	1529.6	1526.7	1524.8	1522.3
G11.0	1545.9	1542.0	1538.3	1534.4	1530.5	1528.0	1524.4	1521.2	1519.0	1516.9
G12.0	1542.3	1537.8	1533.8	1529.6	1525.2	1522.3	1518.3	1515.2	1513.0	1510.7
G13.0	1538.3	1533.4	1528.9	1524.2	1519.4	1516.1	1512.1	1508.6	1506.6	1504.9
G14.0	1533.6	1528.4	1523.2	1518.1	1513.1	1509.4	1505.1	1501.5	1499.8	1498.3
G15.0	1528.7	1522.8	1517.5	1512.0	1506.2	1502.3	1498.1	1494.1	1492.5	1491.5
G16.0	1523.5	1517.0	1510.8	1504.5	1498.8	1494.5	1490.1	1486.3	1484.9	1484.3
G17.0	1517.5	1510.5	1503.7	1497.0	1490.6	1486.1	1481.6	1478.0	1476.8	1477.1
G18.0	1511.2	1503.1	1496.0	1488.8	1482.2	1477.5	1472.7	1469.1	1468.5	1469.3
G19.0	1504.2	1495.7	1487.7	1480.2	1473.1	1467.8	1463.2	1459.6	1459.5	1461.6
G20.0	1496.7	1487.8	1479.3	1471.1	1463.6	1458.5	1453.4	1449.8	1450.6	1453.3
G21.0	1488.4	1479.4	1469.9	1461.6	1453.3	1447.6	1443.0	1439.8	1440.8	1445.0
G22.0	1479.4	1470.3	1460.2	1451.3	1442.6	1436.8	1431.9	1429.1	1431.3	1436.6
G23.0	1470.2	1460.8	1450.0	1440.4	1431.4	1425.1	1420.4	1418.3	1420.9	1427.9
G24.0	1460.4	1450.6	1438.9	1429.1	1419.1	1413.1	1408.4	1406.8	1410.8	1418.7
G25.0	1450.3	1439.9	1428.0	1416.9	1407.1	1400.6	1395.9	1395.4	1400.3	1409.7
G26.0	1439.7	1428.5	1416.3	1404.8	1394.8	1387.9	1383.4	1383.2	1389.5	1400.0
G27.0	1428.8	1416.7	1404.2	1391.8	1381.4	1374.2	1370.3	1371.0	1378.1	1390.1
G28.0	1417.3	1404.3	1391.2	1378.3	1367.4	1360.7	1356.2	1357.4	1366.2	1379.7
G29.0	1405.1	1391.2	1377.6	1364.3	1352.9	1345.0	1342.2	1344.3	1354.3	1369.7
G30.0	1392.7	1378.0	1364.0	1349.4	1337.8	1330.9	1327.3	1330.0	1341.8	1358.6
G31.0	1379.6	1363.8	1349.5	1334.8	1322.4	1314.9	1312.2	1316.1	1328.9	1347.2
G32.0	1365.8	1349.3	1334.4	1318.8	1306.2	1298.9	1296.2	1301.4	1315.7	1335.4
G33.0	1351.8	1334.4	1319.1	1303.3	1290.0	1282.2	1280.3	1286.5	1302.1	1323.5
G34.0	1337.1	1318.9	1302.9	1286.4	1272.4	1265.3	1263.4	1271.1	1288.6	1310.3
G35.0	1322.0	1303.3	1286.2	1270.0	1254.9	1247.8	1246.3	1255.7	1273.6	1296.9
G36.0	1307.1	1286.7	1268.8	1251.7	1237.0	1230.1	1228.3	1239.0	1258.7	1283.5

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	1291.2	1270.2	1252.1	1234.8	1218.5	1211.8	1211.6	1222.8	1243.2	1269.9
G38.0	1275.0	1252.8	1233.9	1215.9	1200.0	1193.3	1193.1	1205.7	1228.2	1255.5
G39.0	1258.3	1235.5	1215.2	1197.3	1181.2	1173.5	1174.6	1188.3	1212.0	1240.9
G40.0	1241.7	1217.0	1195.9	1177.8	1161.3	1154.0	1155.3	1170.1	1196.3	1225.7
G41.0	1223.8	1197.9	1176.1	1157.8	1141.1	1133.4	1134.8	1152.8	1179.9	1211.4
G42.0	1206.4	1177.7	1155.4	1137.3	1119.8	1113.0	1115.4	1133.2	1163.8	1196.8
G43.0	1188.5	1158.3	1134.7	1116.0	1098.5	1091.7	1094.4	1114.3	1147.2	1182.4
G44.0	1170.3	1138.3	1114.1	1095.3	1077.3	1070.8	1073.9	1095.9	1130.4	1168.2
G45.0	1151.8	1116.7	1092.5	1072.8	1055.0	1046.8	1052.6	1077.4	1113.5	1153.8
G46.0	1133.5	1095.0	1070.7	1050.6	1032.1	1025.4	1031.7	1059.2	1096.9	1139.4
G47.0	1113.8	1073.5	1047.4	1026.7	1008.6	1000.9	1009.6	1040.3	1079.4	1125.8
G48.0	1095.0	1051.4	1024.5	1003.1	984.9	977.9	988.1	1022.0	1062.9	1112.8
G49.0	1077.0	1029.4	1000.9	979.3	959.9	953.0	966.1	1003.4	1045.4	1099.5
G50.0	1058.7	1008.4	977.4	955.2	935.2	928.1	943.4	983.8	1029.0	1087.4
G51.0	1039.6	986.4	953.0	930.5	910.0	902.8	920.3	963.1	1011.2	1075.7
G52.0	1021.0	964.5	928.9	905.4	884.8	877.2	897.9	942.5	994.2	1064.1
G53.0	1003.8	942.2	904.2	880.3	859.9	853.5	875.2	920.9	976.7	1052.7
G54.0	986.1	920.2	879.8	855.6	834.3	828.1	853.5	899.6	959.4	1040.5
G55.0	967.8	899.3	854.2	829.8	808.6	804.0	831.3	878.5	943.0	1028.5
G56.0	950.1	878.9	830.0	804.1	782.7	778.7	810.6	858.7	926.5	1017.3
G57.0	932.8	857.2	805.3	777.6	756.0	753.9	788.6	838.3	911.8	1008.1
G58.0	914.7	836.3	781.0	751.4	731.1	728.9	767.0	819.4	896.9	1000.2
G59.0	897.5	816.0	756.9	725.7	704.7	704.5	745.0	799.8	882.5	992.7
G60.0	879.6	796.7	733.5	699.6	677.5	679.6	723.3	781.7	867.9	986.3
G61.0	863.8	777.1	709.4	673.2	651.5	654.6	700.3	763.8	855.5	978.7
G62.0	848.1	758.6	686.2	647.4	624.7	628.4	678.0	746.2	844.0	968.3
G63.0	834.2	738.9	661.4	620.4	597.4	604.5	654.9	729.4	834.9	956.6
G64.0	821.0	720.1	638.5	594.3	571.5	579.5	632.4	712.4	826.4	944.5
G65.0	807.7	701.1	615.2	567.6	543.3	554.7	609.9	695.1	818.7	934.3
G66.0	794.4	682.8	592.5	540.7	515.9	529.0	588.4	678.2	808.9	925.0
G67.0	781.9	664.3	569.3	511.3	486.7	504.6	566.7	662.1	796.2	914.9
G68.0	771.4	647.8	547.2	483.4	459.3	479.4	546.4	648.1	780.8	904.7
G69.0	763.1	631.7	524.3	455.8	432.6	455.1	524.8	635.9	766.8	892.7
G70.0	755.9	615.7	501.4	430.0	406.6	431.5	503.8	625.3	753.9	878.0
G71.0	747.9	596.5	478.2	404.1	379.5	408.2	484.2	612.9	741.8	858.0
G72.0	736.3	578.6	457.6	379.6	354.4	385.1	465.3	597.9	730.7	838.4
G73.0	721.9	564.0	437.9	354.8	326.7	361.9	446.4	581.2	717.4	824.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	708.9	554.2	419.6	331.2	300.6	338.4	428.8	563.5	695.3	806.3
G75.0	698.6	545.6	402.5	307.7	274.8	314.4	412.5	547.5	673.2	781.8
G76.0	686.2	534.6	385.2	283.3	251.6	290.8	398.8	536.3	655.4	748.7
G77.0	667.9	520.5	365.5	260.4	227.2	268.7	385.2	525.3	637.4	666.8
G78.0	644.5	506.9	347.2	239.1	203.4	248.4	369.8	503.6	617.4	583.5
G79.0	626.8	495.1	334.4	217.9	180.3	228.9	351.2	480.6	579.1	550.0
G80.0	602.1	478.8	325.3	198.1	158.7	209.9	333.6	461.0	473.9	527.3
G81.0	578.0	454.9	312.1	178.4	136.2	192.1	321.3	440.4	428.3	507.0
G82.0	491.3	437.0	293.6	161.6	117.0	175.8	303.0	402.4	404.1	487.5
G83.0	416.1	411.4	283.6	145.5	97.1	161.1	281.2	306.3	384.7	468.0
G84.0	394.4	366.8	265.7	131.0	79.4	147.5	260.2	281.5	365.1	451.0
G85.0	375.9	280.8	245.4	118.6	62.4	131.9	229.2	262.6	347.0	432.7
G86.0	357.6	260.4	221.4	107.1	47.3	119.2	164.1	243.4	329.2	413.6
G87.0	338.5	241.9	151.2	94.3	33.3	102.4	146.9	226.5	309.9	386.0
G88.0	312.5	221.6	133.0	76.5	21.0	77.4	128.7	208.5	272.3	209.0
G89.0	275.7	192.1	112.5	49.9	12.2	50.8	111.7	150.5	63.6	18.3
G90.0	118.4	122.1	79.4	30.3	5.3	34.8	30.9	5.7	5.2	4.6
G91.0	5.9	4.6	2.8	1.7	1.4	1.6	1.7	1.9	2.1	2.4
G92.0	2.3	1.9	1.8	1.6	1.5	1.5	1.7	1.9	2.2	2.5
G93.0	2.3	2.0	1.9	1.7	1.7	1.7	1.8	2.0	2.3	2.6
G94.0	2.4	2.2	2.0	1.9	1.8	1.9	1.9	2.2	2.4	2.7
G95.0	2.6	2.3	2.1	2.0	2.0	2.0	2.1	2.3	2.6	2.8
G96.0	2.8	2.5	2.3	2.2	2.2	2.2	2.3	2.5	2.7	3.0
G97.0	2.9	2.7	2.5	2.4	2.3	2.3	2.4	2.6	2.8	3.1
G98.0	3.1	2.8	2.7	2.6	2.5	2.5	2.6	2.8	3.0	3.3
G99.0	3.2	3.0	2.8	2.7	2.7	2.7	2.8	2.9	3.2	3.5
G100.0	3.4	3.1	3.0	2.9	2.8	2.8	2.9	3.1	3.3	3.6
G101.0	3.5	3.3	3.1	3.0	3.0	3.0	3.1	3.3	3.5	3.8
G102.0	3.7	3.5	3.3	3.3	3.2	3.2	3.3	3.4	3.7	3.9
G103.0	3.9	3.7	3.5	3.4	3.4	3.4	3.5	3.5	3.8	4.1
G104.0	4.0	3.8	3.7	3.6	3.6	3.6	3.6	3.7	3.9	4.2
G105.0	4.2	4.0	3.8	3.8	3.7	3.7	3.8	3.9	4.1	4.4
G106.0	4.4	4.1	4.0	4.0	4.0	3.9	4.0	4.1	4.3	4.6
G107.0	4.6	4.4	4.2	4.2	4.1	4.1	4.2	4.3	4.4	4.7
G108.0	4.7	4.5	4.4	4.4	4.4	4.3	4.4	4.4	4.6	4.9
G109.0	4.9	4.7	4.6	4.6	4.5	4.5	4.6	4.6	4.8	5.1
G110.0	5.1	4.9	4.8	4.8	4.7	4.6	4.7	4.8	5.0	5.3

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	5.3	5.1	5.0	4.9	4.9	4.8	4.8	4.9	5.1	5.4
G112.0	5.4	5.3	5.2	5.1	5.1	5.0	5.0	5.1	5.3	5.5
G113.0	5.6	5.4	5.3	5.3	5.2	5.2	5.1	5.3	5.4	5.6
G114.0	5.8	5.6	5.5	5.4	5.4	5.3	5.4	5.4	5.6	5.8
G115.0	6.0	5.8	5.7	5.6	5.6	5.5	5.5	5.6	5.7	6.0
G116.0	6.1	6.0	5.9	5.8	5.7	5.6	5.6	5.7	5.9	6.2
G117.0	6.3	6.2	6.0	6.0	5.9	5.8	5.8	5.9	6.1	6.3
G118.0	6.5	6.3	6.2	6.1	6.1	6.0	5.9	6.1	6.3	6.5
G119.0	6.6	6.5	6.3	6.3	6.3	6.1	6.2	6.3	6.4	6.6
G120.0	6.8	6.6	6.5	6.4	6.4	6.3	6.3	6.4	6.6	6.8
G121.0	7.0	6.8	6.7	6.6	6.6	6.4	6.4	6.5	6.8	7.0
G122.0	7.2	7.0	6.8	6.8	6.7	6.6	6.6	6.7	6.9	7.2
G123.0	7.3	7.1	7.0	6.9	6.9	6.8	6.7	6.8	7.1	7.3
G124.0	7.5	7.3	7.2	7.1	7.0	6.9	6.9	7.0	7.2	7.4
G125.0	7.6	7.4	7.3	7.2	7.2	7.0	7.0	7.1	7.3	7.5
G126.0	7.8	7.6	7.4	7.4	7.3	7.2	7.2	7.3	7.4	7.7
G127.0	7.9	7.7	7.5	7.5	7.4	7.3	7.3	7.3	7.5	7.8
G128.0	8.0	7.8	7.7	7.6	7.6	7.4	7.4	7.5	7.7	7.9
G129.0	8.1	8.0	7.9	7.8	7.7	7.6	7.5	7.6	7.8	8.0
G130.0	8.3	8.1	8.0	7.9	7.8	7.7	7.7	7.7	7.9	8.1
G131.0	8.4	8.2	8.1	8.0	8.0	7.8	7.8	7.9	8.1	8.3
G132.0	8.5	8.3	8.3	8.1	8.1	8.0	7.9	8.0	8.1	8.4
G133.0	8.6	8.4	8.3	8.3	8.2	8.1	8.1	8.1	8.3	8.5
G134.0	8.8	8.6	8.4	8.4	8.3	8.2	8.1	8.2	8.4	8.6
G135.0	8.9	8.7	8.6	8.5	8.4	8.3	8.3	8.3	8.5	8.7
G136.0	9.0	8.8	8.7	8.6	8.5	8.4	8.4	8.4	8.6	8.8
G137.0	9.1	8.9	8.8	8.7	8.7	8.5	8.5	8.5	8.7	8.9
G138.0	9.1	9.0	8.9	8.8	8.8	8.7	8.6	8.6	8.8	9.0
G139.0	9.2	9.1	9.0	9.0	8.9	8.8	8.7	8.7	8.9	9.1
G140.0	9.3	9.2	9.1	9.1	9.0	8.9	8.8	8.8	9.0	9.1
G141.0	9.4	9.3	9.2	9.1	9.1	9.0	8.9	8.9	9.1	9.2
G142.0	9.5	9.3	9.3	9.2	9.2	9.1	9.0	9.1	9.1	9.3
G143.0	9.6	9.4	9.4	9.3	9.3	9.2	9.1	9.1	9.2	9.4
G144.0	9.7	9.5	9.5	9.5	9.4	9.3	9.2	9.2	9.3	9.4
G145.0	9.7	9.6	9.6	9.5	9.5	9.4	9.3	9.3	9.4	9.5
G146.0	9.8	9.7	9.7	9.6	9.6	9.5	9.4	9.4	9.5	9.6
G147.0	9.9	9.8	9.8	9.7	9.7	9.6	9.5	9.5	9.6	9.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	10.0	9.9	9.8	9.8	9.7	9.7	9.6	9.6	9.7	9.8
G149.0	10.1	9.9	9.8	9.9	9.9	9.8	9.7	9.7	9.7	9.8
G150.0	10.1	10.1	10.0	10.0	9.9	9.9	9.8	9.8	9.8	9.9
G151.0	10.2	10.1	10.1	10.1	10.0	9.9	9.9	9.9	9.9	9.9
G152.0	10.2	10.2	10.1	10.1	10.1	10.1	10.0	9.9	10.0	10.0
G153.0	10.3	10.3	10.2	10.2	10.2	10.1	10.1	10.1	10.1	10.1
G154.0	10.4	10.3	10.3	10.3	10.3	10.2	10.2	10.1	10.1	10.2
G155.0	10.4	10.4	10.4	10.4	10.3	10.3	10.3	10.2	10.2	10.2
G156.0	10.5	10.5	10.5	10.4	10.3	10.4	10.3	10.3	10.3	10.3
G157.0	10.6	10.6	10.5	10.5	10.5	10.5	10.5	10.4	10.4	10.4
G158.0	10.7	10.6	10.6	10.6	10.6	10.5	10.5	10.5	10.5	10.5
G159.0	10.8	10.7	10.7	10.7	10.7	10.6	10.5	10.6	10.6	10.5
G160.0	10.8	10.8	10.8	10.7	10.7	10.7	10.7	10.7	10.6	10.6
G161.0	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.7	10.7	10.7
G162.0	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.8	10.8	10.7
G163.0	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.9	10.8
G164.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	10.9	10.9	10.9
G165.0	11.0	11.0	11.0	11.0	11.1	11.1	11.0	11.0	10.9	10.9
G166.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.0	11.0
G167.0	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.1	11.1	11.0
G168.0	11.1	11.2	11.2	11.2	11.3	11.3	11.3	11.2	11.1	11.1
G169.0	11.3	11.3	11.3	11.3	11.3	11.4	11.3	11.3	11.2	11.2
G170.0	11.3	11.3	11.3	11.4	11.4	11.4	11.4	11.3	11.3	11.2
G171.0	11.4	11.4	11.4	11.4	11.5	11.5	11.5	11.4	11.3	11.3
G172.0	11.4	11.4	11.4	11.5	11.5	11.5	11.5	11.4	11.4	11.4
G173.0	11.5	11.5	11.5	11.5	11.6	11.6	11.6	11.5	11.5	11.4
G174.0	11.5	11.5	11.5	11.6	11.6	11.6	11.6	11.5	11.5	11.5
G175.0	11.5	11.5	11.6	11.6	11.7	11.7	11.6	11.6	11.5	11.5
G176.0	11.6	11.4	11.6	11.7	11.7	11.7	11.6	11.6	11.6	11.6
G177.0	11.6	11.6	11.6	11.7	11.7	11.7	11.7	11.6	11.6	11.6
G178.0	11.6	11.6	11.7	11.7	11.8	11.7	11.7	11.6	11.6	11.6
G179.0	11.6	11.7	11.7	11.8	11.8	11.7	11.7	11.7	11.6	11.7
G180.0	11.7	11.7	11.7	11.8	11.8	11.8	11.7	11.7	11.7	11.7

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	1556.3	1556.1	1556.6	1557.2	1557.1	1557.8	1557.4	1557.6	1557.3	1557.6
G1.0	1554.7	1554.0	1554.4	1554.6	1554.5	1555.1	1554.0	1554.5	1554.0	1553.7
G2.0	1552.6	1551.8	1551.8	1551.5	1551.5	1551.4	1550.5	1550.6	1549.9	1549.9
G3.0	1550.1	1548.8	1548.8	1548.2	1547.8	1547.6	1546.6	1546.7	1545.8	1545.8
G4.0	1547.2	1545.7	1545.4	1544.6	1543.9	1543.9	1542.8	1542.5	1541.8	1541.3
G5.0	1544.0	1542.3	1542.1	1540.8	1540.2	1540.0	1538.8	1538.4	1537.3	1537.2
G6.0	1540.2	1538.5	1537.8	1536.8	1536.0	1535.9	1534.6	1534.4	1533.4	1533.5
G7.0	1536.2	1534.6	1533.7	1532.5	1532.0	1532.1	1531.0	1530.7	1530.2	1530.3
G8.0	1531.4	1530.1	1529.3	1528.4	1528.3	1528.4	1527.7	1527.7	1527.3	1527.8
G9.0	1526.6	1525.3	1525.1	1524.5	1524.7	1525.2	1524.5	1525.0	1525.2	1525.8
G10.0	1521.8	1520.4	1520.5	1520.4	1521.0	1521.8	1521.9	1522.9	1523.3	1524.4
G11.0	1516.3	1515.3	1516.1	1516.6	1517.7	1519.2	1519.7	1521.6	1522.0	1523.5
G12.0	1510.8	1510.2	1511.5	1512.7	1514.5	1516.5	1518.0	1520.4	1521.9	1523.2
G13.0	1505.1	1505.3	1507.4	1508.9	1511.7	1514.2	1516.7	1520.0	1522.4	1523.8
G14.0	1499.2	1499.7	1502.9	1505.2	1508.9	1512.8	1516.1	1519.9	1523.1	1525.4
G15.0	1493.1	1494.5	1498.6	1502.0	1506.8	1512.2	1515.9	1520.4	1524.0	1526.9
G16.0	1486.8	1488.9	1493.9	1498.8	1504.8	1510.9	1515.6	1520.7	1524.6	1527.7
G17.0	1480.3	1483.4	1490.1	1495.7	1503.1	1509.7	1515.0	1520.6	1524.6	1527.9
G18.0	1473.4	1477.9	1485.8	1492.9	1501.0	1508.2	1513.9	1520.1	1524.2	1527.9
G19.0	1466.8	1472.6	1481.8	1489.9	1498.6	1505.9	1513.0	1519.0	1523.2	1527.1
G20.0	1459.9	1467.0	1477.7	1486.4	1495.7	1503.7	1510.7	1517.6	1522.1	1526.2
G21.0	1452.7	1461.3	1473.1	1482.9	1492.4	1500.9	1508.2	1515.7	1520.5	1524.8
G22.0	1445.4	1455.9	1468.2	1479.3	1488.6	1497.4	1505.3	1513.3	1519.0	1523.9
G23.0	1438.2	1449.8	1463.0	1474.4	1484.3	1493.6	1502.4	1511.2	1517.8	1523.6
G24.0	1430.5	1443.2	1457.4	1469.0	1479.8	1489.9	1499.6	1509.3	1516.8	1523.4
G25.0	1423.0	1436.4	1451.2	1463.1	1475.1	1486.3	1497.2	1508.1	1516.1	1523.4
G26.0	1414.7	1428.9	1444.1	1456.8	1470.1	1482.3	1495.0	1506.4	1516.0	1524.2
G27.0	1406.3	1421.5	1436.7	1450.7	1465.3	1479.0	1492.4	1505.8	1516.6	1526.0
G28.0	1396.7	1413.2	1429.4	1444.2	1460.2	1476.1	1490.8	1505.5	1518.0	1528.6
G29.0	1387.4	1404.3	1421.5	1438.0	1455.7	1473.2	1489.6	1505.8	1520.3	1532.3
G30.0	1377.3	1395.2	1413.3	1431.5	1451.4	1471.3	1489.8	1507.6	1523.8	1538.3
G31.0	1367.2	1385.6	1405.6	1425.8	1447.5	1469.6	1490.3	1510.9	1529.6	1545.0
G32.0	1356.2	1375.6	1398.1	1419.7	1444.2	1468.9	1491.9	1515.7	1536.5	1554.0
G33.0	1345.0	1365.9	1390.2	1414.8	1441.5	1469.2	1495.4	1521.7	1545.0	1564.6
G34.0	1333.0	1356.2	1382.4	1409.8	1439.4	1470.7	1500.0	1528.9	1555.2	1576.7
G35.0	1320.8	1346.5	1375.1	1405.4	1438.7	1472.9	1505.8	1537.6	1566.8	1589.6
G36.0	1308.8	1336.3	1367.8	1401.6	1438.6	1476.6	1513.1	1548.7	1578.7	1602.8

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	1296.7	1326.5	1361.1	1399.1	1439.4	1481.3	1522.0	1559.1	1590.9	1614.7
G38.0	1284.7	1317.4	1355.3	1397.2	1441.5	1487.8	1531.4	1570.4	1601.8	1625.2
G39.0	1272.1	1308.2	1350.4	1396.1	1444.5	1495.6	1541.3	1580.3	1611.4	1634.9
G40.0	1259.9	1298.8	1346.3	1395.6	1449.2	1503.8	1550.4	1588.8	1619.3	1642.1
G41.0	1247.8	1290.7	1342.4	1396.5	1455.6	1511.0	1558.1	1596.5	1625.2	1647.7
G42.0	1235.9	1282.8	1338.9	1398.7	1461.4	1517.8	1564.2	1601.2	1629.8	1653.8
G43.0	1224.5	1276.2	1336.5	1402.5	1467.1	1523.4	1568.4	1604.9	1635.6	1660.9
G44.0	1214.0	1270.4	1335.0	1405.9	1472.0	1527.0	1570.5	1609.3	1641.9	1667.3
G45.0	1203.7	1264.5	1334.9	1408.8	1475.5	1528.6	1573.3	1614.4	1648.0	1673.3
G46.0	1194.3	1259.2	1336.1	1411.5	1477.0	1529.0	1577.3	1619.7	1652.9	1677.0
G47.0	1185.3	1254.9	1337.0	1412.9	1476.2	1530.7	1581.3	1623.8	1655.9	1678.1
G48.0	1177.1	1252.3	1337.8	1412.8	1474.2	1532.7	1584.4	1626.5	1654.8	1674.1
G49.0	1169.1	1251.1	1337.9	1410.7	1474.0	1534.8	1586.5	1625.1	1649.4	1666.5
G50.0	1161.4	1250.0	1337.1	1406.6	1473.9	1537.2	1585.4	1619.1	1641.1	1660.2
G51.0	1154.4	1248.7	1334.4	1403.5	1473.9	1536.8	1579.9	1609.7	1634.5	1654.1
G52.0	1149.0	1247.1	1329.7	1402.3	1473.2	1532.0	1571.0	1602.4	1628.7	1649.5
G53.0	1145.2	1244.6	1323.3	1401.2	1470.6	1523.5	1561.7	1595.8	1623.5	1644.0
G54.0	1141.1	1239.9	1319.1	1400.1	1464.4	1512.2	1553.8	1589.5	1617.1	1637.5
G55.0	1136.8	1233.4	1316.4	1396.1	1454.0	1502.5	1546.6	1582.2	1610.1	1628.9
G56.0	1132.2	1225.3	1313.7	1389.2	1442.8	1493.5	1538.3	1574.4	1600.2	1617.6
G57.0	1125.4	1217.9	1309.6	1379.1	1432.4	1484.3	1528.6	1563.8	1588.0	1601.2
G58.0	1115.8	1213.1	1302.6	1367.3	1422.7	1473.0	1518.6	1550.7	1568.8	1580.9
G59.0	1103.6	1207.5	1292.2	1355.5	1412.6	1463.5	1505.8	1532.1	1545.1	1548.8
G60.0	1091.6	1200.1	1281.3	1344.9	1401.5	1451.6	1487.4	1507.5	1509.5	1506.8
G61.0	1082.4	1188.9	1268.2	1333.3	1390.6	1435.9	1463.2	1470.0	1464.1	1452.5
G62.0	1074.7	1176.3	1254.6	1320.3	1378.2	1415.2	1428.2	1423.0	1406.0	1395.1
G63.0	1066.4	1161.3	1240.5	1309.3	1359.9	1384.4	1379.2	1362.3	1347.0	1345.6
G64.0	1057.2	1146.6	1224.4	1296.2	1335.9	1339.1	1317.2	1305.3	1302.1	1309.4
G65.0	1046.5	1131.2	1210.9	1276.6	1298.6	1282.1	1258.1	1259.8	1269.5	1280.8
G66.0	1033.8	1114.8	1196.9	1249.0	1245.1	1216.6	1213.6	1227.5	1242.9	1258.8
G67.0	1018.6	1100.1	1175.5	1205.2	1178.9	1163.8	1179.6	1201.0	1220.8	1238.1
G68.0	1002.0	1087.7	1148.3	1143.4	1116.8	1128.9	1153.7	1180.0	1202.0	1220.6
G69.0	983.5	1069.4	1103.7	1067.8	1073.4	1101.2	1132.8	1161.0	1184.9	1205.1
G70.0	969.3	1045.7	1038.5	1010.2	1043.1	1079.5	1113.9	1144.0	1169.5	1190.6
G71.0	954.2	1007.0	960.7	974.8	1016.7	1060.2	1096.7	1128.9	1155.5	1177.4
G72.0	932.9	944.5	910.5	947.0	994.6	1042.5	1081.3	1115.1	1142.6	1166.3
G73.0	906.6	859.3	877.6	924.7	974.6	1025.9	1067.1	1102.2	1131.9	1156.2

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	852.0	808.2	852.9	905.5	956.5	1010.0	1054.0	1091.2	1121.7	1146.4
G75.0	762.7	777.0	832.1	887.8	940.8	994.6	1042.3	1080.5	1110.7	1134.6
G76.0	700.6	753.2	814.0	871.9	926.3	980.0	1029.6	1069.0	1098.2	1122.5
G77.0	666.2	732.3	796.6	856.8	913.2	964.6	1015.7	1056.1	1084.8	1107.4
G78.0	641.6	714.5	780.2	843.6	899.5	949.5	1000.9	1042.1	1069.7	1092.3
G79.0	619.9	694.6	766.3	829.9	884.4	934.3	984.6	1026.6	1054.4	1075.4
G80.0	601.1	676.0	752.1	814.4	867.8	919.1	968.5	1011.2	1038.1	1057.9
G81.0	583.3	658.0	735.3	797.8	851.2	904.4	951.6	994.7	1020.3	1039.1
G82.0	567.4	641.3	716.3	780.3	833.6	889.3	933.7	969.8	984.8	988.2
G83.0	551.6	624.2	696.3	762.4	816.0	866.7	884.7	874.0	828.4	788.8
G84.0	531.5	606.2	676.6	738.0	771.9	753.2	692.7	611.7	523.2	482.0
G85.0	509.6	586.2	643.7	637.3	554.0	463.0	381.0	298.6	226.9	190.9
G86.0	488.5	526.4	463.3	355.6	253.6	178.9	117.9	80.4	51.8	39.5
G87.0	384.1	268.6	169.0	94.0	50.4	25.0	17.1	14.5	13.8	13.8
G88.0	115.0	44.2	17.9	12.2	11.9	12.0	11.7	11.1	10.5	10.0
G89.0	9.1	9.1	9.0	8.1	7.5	6.8	6.4	6.1	5.8	5.7
G90.0	4.4	3.9	4.0	4.0	4.1	4.2	4.2	4.3	4.3	4.3
G91.0	2.7	3.0	3.3	3.5	3.7	3.9	4.0	4.1	4.2	4.3
G92.0	2.8	3.1	3.4	3.7	3.9	4.1	4.2	4.3	4.4	4.5
G93.0	2.9	3.3	3.5	3.8	4.1	4.3	4.4	4.5	4.6	4.7
G94.0	3.0	3.4	3.7	4.0	4.2	4.4	4.6	4.7	4.8	4.9
G95.0	3.2	3.5	3.8	4.1	4.4	4.6	4.8	4.9	5.0	5.1
G96.0	3.3	3.7	4.0	4.3	4.6	4.8	5.0	5.1	5.2	5.3
G97.0	3.5	3.8	4.2	4.4	4.7	5.0	5.2	5.3	5.4	5.5
G98.0	3.7	4.0	4.3	4.6	4.9	5.2	5.4	5.5	5.7	5.8
G99.0	3.8	4.2	4.5	4.8	5.1	5.4	5.6	5.8	5.9	6.0
G100.0	4.0	4.3	4.7	5.0	5.4	5.6	5.8	6.0	6.2	6.3
G101.0	4.1	4.5	4.8	5.2	5.5	5.8	6.0	6.2	6.4	6.5
G102.0	4.3	4.6	5.0	5.4	5.6	6.0	6.2	6.4	6.6	6.7
G103.0	4.4	4.8	5.2	5.5	5.8	6.1	6.3	6.6	6.8	6.9
G104.0	4.6	5.0	5.4	5.6	6.0	6.3	6.5	6.8	6.9	7.1
G105.0	4.8	5.1	5.5	5.8	6.2	6.4	6.7	6.9	7.2	7.3
G106.0	4.9	5.3	5.6	6.0	6.3	6.6	6.9	7.2	7.3	7.5
G107.0	5.1	5.4	5.8	6.2	6.5	6.8	7.1	7.3	7.5	7.7
G108.0	5.3	5.6	6.0	6.4	6.7	7.1	7.3	7.5	7.8	8.0
G109.0	5.4	5.8	6.2	6.5	6.9	7.2	7.5	7.8	8.0	8.1
G110.0	5.6	6.0	6.3	6.7	7.1	7.4	7.7	8.0	8.2	8.4

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	5.7	6.1	6.5	6.9	7.2	7.6	7.9	8.1	8.4	8.6
G112.0	5.8	6.2	6.6	7.0	7.3	7.7	8.0	8.3	8.5	8.7
G113.0	6.0	6.3	6.8	7.1	7.5	7.8	8.1	8.4	8.7	8.9
G114.0	6.1	6.5	6.9	7.3	7.6	8.0	8.3	8.6	8.8	9.0
G115.0	6.3	6.6	7.0	7.4	7.8	8.1	8.4	8.7	9.0	9.2
G116.0	6.4	6.8	7.2	7.6	7.9	8.3	8.6	8.9	9.1	9.3
G117.0	6.6	6.9	7.3	7.7	8.1	8.4	8.7	9.1	9.3	9.5
G118.0	6.8	7.1	7.5	7.9	8.2	8.6	8.9	9.1	9.4	9.7
G119.0	6.9	7.3	7.6	8.0	8.3	8.7	9.1	9.3	9.6	9.9
G120.0	7.1	7.4	7.8	8.1	8.5	8.9	9.2	9.5	9.8	9.9
G121.0	7.3	7.6	7.9	8.3	8.6	9.0	9.3	9.6	9.9	10.1
G122.0	7.4	7.7	8.1	8.4	8.8	9.1	9.5	9.8	10.0	10.2
G123.0	7.6	7.9	8.2	8.5	8.9	9.2	9.5	9.9	10.1	10.3
G124.0	7.7	8.0	8.3	8.7	9.0	9.3	9.6	9.9	10.2	10.4
G125.0	7.8	8.1	8.4	8.8	9.1	9.4	9.7	10.0	10.3	10.5
G126.0	8.0	8.3	8.5	8.9	9.2	9.5	9.8	10.1	10.3	10.5
G127.0	8.1	8.3	8.6	9.0	9.2	9.5	9.9	10.1	10.3	10.6
G128.0	8.1	8.4	8.7	9.0	9.3	9.6	9.9	10.1	10.4	10.6
G129.0	8.3	8.5	8.8	9.1	9.4	9.7	9.9	10.2	10.5	10.6
G130.0	8.4	8.6	8.9	9.2	9.4	9.7	10.0	10.2	10.5	10.7
G131.0	8.5	8.7	9.0	9.2	9.5	9.8	10.1	10.3	10.5	10.7
G132.0	8.6	8.9	9.1	9.3	9.6	9.9	10.1	10.3	10.5	10.7
G133.0	8.7	8.9	9.2	9.4	9.7	9.9	10.1	10.3	10.5	10.7
G134.0	8.8	9.0	9.3	9.5	9.8	9.9	10.2	10.4	10.6	10.8
G135.0	8.9	9.1	9.4	9.6	9.8	10.1	10.2	10.4	10.6	10.8
G136.0	9.0	9.2	9.4	9.7	9.9	10.1	10.3	10.5	10.6	10.8
G137.0	9.1	9.3	9.5	9.8	9.9	10.1	10.3	10.5	10.7	10.8
G138.0	9.1	9.4	9.6	9.8	10.0	10.2	10.4	10.6	10.7	10.9
G139.0	9.2	9.5	9.7	9.9	10.1	10.3	10.5	10.6	10.8	10.9
G140.0	9.3	9.5	9.8	9.9	10.1	10.3	10.5	10.7	10.8	10.9
G141.0	9.4	9.6	9.8	10.1	10.2	10.4	10.5	10.7	10.9	10.9
G142.0	9.5	9.7	9.9	10.1	10.3	10.4	10.6	10.8	10.9	11.0
G143.0	9.5	9.8	9.9	10.1	10.3	10.5	10.6	10.8	10.9	11.0
G144.0	9.6	9.8	10.0	10.2	10.4	10.5	10.7	10.8	10.9	11.0
G145.0	9.7	9.9	10.1	10.2	10.4	10.6	10.7	10.8	10.9	11.0
G146.0	9.8	9.9	10.1	10.3	10.4	10.6	10.7	10.9	11.0	11.1
G147.0	9.8	9.9	10.1	10.3	10.4	10.6	10.8	10.9	11.0	11.1

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	9.9	10.0	10.2	10.3	10.5	10.6	10.8	10.9	11.0	11.1
G149.0	9.9	10.1	10.2	10.4	10.5	10.7	10.8	10.9	11.0	11.1
G150.0	10.0	10.1	10.2	10.3	10.6	10.7	10.8	10.9	11.0	11.1
G151.0	10.0	10.2	10.3	10.4	10.6	10.7	10.9	10.9	11.0	11.1
G152.0	10.1	10.2	10.3	10.5	10.5	10.7	10.8	10.9	11.0	11.1
G153.0	10.1	10.2	10.4	10.5	10.6	10.7	10.9	10.9	11.0	11.1
G154.0	10.2	10.3	10.4	10.5	10.6	10.8	10.9	10.9	11.0	11.1
G155.0	10.3	10.3	10.4	10.5	10.7	10.8	10.9	10.9	11.0	11.1
G156.0	10.3	10.4	10.5	10.6	10.7	10.8	10.9	10.9	11.0	11.1
G157.0	10.4	10.4	10.5	10.6	10.6	10.8	10.9	10.9	11.0	11.1
G158.0	10.5	10.5	10.6	10.6	10.7	10.8	10.9	10.9	11.0	11.0
G159.0	10.5	10.5	10.6	10.7	10.8	10.8	10.9	10.9	11.0	11.1
G160.0	10.6	10.6	10.6	10.7	10.8	10.9	10.9	10.9	11.0	11.0
G161.0	10.7	10.7	10.7	10.7	10.8	10.9	10.9	10.9	11.0	11.0
G162.0	10.7	10.7	10.7	10.8	10.8	10.9	10.9	11.0	11.0	11.0
G163.0	10.8	10.8	10.8	10.8	10.9	10.9	10.9	10.9	11.0	11.0
G164.0	10.9	10.9	10.9	10.9	10.9	10.9	10.9	11.0	11.0	11.0
G165.0	10.9	10.9	10.9	10.9	10.9	10.9	11.0	10.9	11.0	11.0
G166.0	10.9	10.9	11.0	10.9	11.0	11.0	11.0	11.0	11.0	11.0
G167.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.1	11.1
G168.0	11.1	11.0	11.0	11.0	11.1	11.1	11.1	11.1	11.1	11.1
G169.0	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.1	11.2	11.1
G170.0	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2
G171.0	11.3	11.3	11.2	11.3	11.2	11.2	11.2	11.2	11.3	11.2
G172.0	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3
G173.0	11.4	11.4	11.4	11.4	11.4	11.4	11.3	11.3	11.3	11.3
G174.0	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.3	11.4	11.4
G175.0	11.5	11.5	11.5	11.5	11.5	11.4	11.4	11.4	11.4	11.4
G176.0	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5
G177.0	11.6	11.6	11.6	11.5	11.5	11.5	11.5	11.5	11.5	11.5
G178.0	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.5	11.6	11.5
G179.0	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6	11.6
G180.0	11.6	11.6	11.7	11.6	11.6	11.6	11.6	11.6	11.6	11.6

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G0.0	1557.7	1558.1	1551.2							
G1.0	1554.0	1554.2	1546.8							
G2.0	1549.7	1549.6	1542.1							
G3.0	1545.3	1545.2	1537.8							
G4.0	1541.0	1540.7	1534.1							
G5.0	1537.0	1536.6	1531.4							
G6.0	1533.1	1532.8	1528.7							
G7.0	1529.8	1529.7	1527.1							
G8.0	1527.5	1527.3	1526.3							
G9.0	1525.6	1525.6	1525.9							
G10.0	1524.4	1524.5	1526.8							
G11.0	1523.8	1523.9	1528.2							
G12.0	1523.7	1524.6	1530.2							
G13.0	1524.8	1526.1	1532.1							
G14.0	1526.8	1528.3	1533.1							
G15.0	1528.3	1529.7	1533.5							
G16.0	1529.5	1530.8	1533.6							
G17.0	1529.8	1531.5	1533.5							
G18.0	1529.9	1531.8	1533.2							
G19.0	1529.4	1531.6	1532.8							
G20.0	1528.8	1531.0	1533.0							
G21.0	1528.4	1530.8	1533.2							
G22.0	1528.1	1531.0	1534.0							
G23.0	1528.1	1531.0	1535.8							
G24.0	1528.4	1531.5	1538.3							
G25.0	1529.1	1532.7	1541.5							
G26.0	1531.1	1535.2	1545.8							
G27.0	1533.5	1537.8	1552.0							
G28.0	1537.4	1542.1	1560.2							
G29.0	1542.8	1548.0	1569.2							
G30.0	1549.2	1556.1	1580.4							
G31.0	1557.6	1565.1	1592.9							
G32.0	1567.8	1576.5	1606.9							
G33.0	1579.6	1588.7	1620.8							
G34.0	1593.8	1602.9	1633.8							
G35.0	1606.4	1616.6	1645.8							
G36.0	1620.2	1630.2	1656.6							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G37.0	1631.9	1642.3	1665.2							
G38.0	1642.8	1652.7	1671.8							
G39.0	1651.4	1661.4	1678.1							
G40.0	1658.5	1667.9	1686.1							
G41.0	1664.0	1674.7	1693.8							
G42.0	1671.8	1682.8	1700.8							
G43.0	1679.3	1690.7	1706.2							
G44.0	1686.5	1697.5	1709.1							
G45.0	1691.5	1702.8	1707.6							
G46.0	1694.7	1704.8	1701.4							
G47.0	1693.7	1702.2	1694.7							
G48.0	1687.6	1695.7	1689.9							
G49.0	1680.5	1688.8	1685.1							
G50.0	1674.8	1683.8	1681.3							
G51.0	1669.9	1679.5	1675.2							
G52.0	1665.8	1674.9	1669.3							
G53.0	1659.3	1668.7	1659.2							
G54.0	1653.2	1661.7	1646.7							
G55.0	1642.6	1651.1	1629.3							
G56.0	1629.1	1636.2	1606.1							
G57.0	1610.7	1617.3	1570.3							
G58.0	1585.9	1588.2	1523.9							
G59.0	1549.0	1546.5	1468.4							
G60.0	1501.0	1497.8	1415.5							
G61.0	1444.5	1440.2	1370.2							
G62.0	1389.3	1389.3	1338.0							
G63.0	1347.7	1349.6	1311.5							
G64.0	1315.8	1319.8	1290.1							
G65.0	1290.4	1296.5	1271.6							
G66.0	1269.2	1276.2	1255.5							
G67.0	1250.6	1258.4	1240.2							
G68.0	1234.6	1242.4	1226.9							
G69.0	1219.6	1227.9	1214.2							
G70.0	1205.5	1214.4	1203.5							
G71.0	1193.0	1202.5	1193.7							
G72.0	1182.6	1192.7	1183.4							
G73.0	1173.1	1183.0	1171.8							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G74.0	1162.6	1172.2	1159.5							
G75.0	1150.7	1159.7	1146.3							
G76.0	1137.7	1145.6	1132.7							
G77.0	1122.1	1130.3	1117.7							
G78.0	1106.8	1115.2	1103.1							
G79.0	1090.1	1098.9	1087.5							
G80.0	1072.8	1082.3	1056.4							
G81.0	1051.1	1057.3	920.4							
G82.0	976.3	969.7	632.5							
G83.0	739.0	715.1	317.9							
G84.0	429.8	399.9	101.3							
G85.0	157.5	140.5	19.3							
G86.0	28.3	26.2	13.7							
G87.0	13.7	13.7	8.3							
G88.0	9.6	9.1	5.2							
G89.0	5.4	5.3	4.6							
G90.0	4.4	4.3	4.6							
G91.0	4.3	4.3	4.8							
G92.0	4.5	4.6	5.0							
G93.0	4.8	4.8	5.2							
G94.0	5.0	5.0	5.4							
G95.0	5.2	5.2	5.6							
G96.0	5.4	5.4	5.8							
G97.0	5.6	5.6	6.1							
G98.0	5.8	5.9	6.3							
G99.0	6.1	6.2	6.6							
G100.0	6.3	6.4	6.9							
G101.0	6.6	6.7	7.1							
G102.0	6.8	6.9	7.3							
G103.0	7.0	7.1	7.4							
G104.0	7.2	7.3	7.6							
G105.0	7.4	7.4	7.8							
G106.0	7.6	7.7	8.1							
G107.0	7.8	7.9	8.3							
G108.0	8.1	8.2	8.6							
G109.0	8.3	8.4	8.8							
G110.0	8.5	8.6	9.0							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G111.0	8.7	8.8	9.1							
G112.0	8.9	9.0	9.3							
G113.0	9.0	9.1	9.4							
G114.0	9.2	9.3	9.6							
G115.0	9.3	9.5	9.8							
G116.0	9.5	9.6	9.9							
G117.0	9.7	9.8	10.1							
G118.0	9.9	9.9	10.2							
G119.0	10.0	10.1	10.4							
G120.0	10.1	10.3	10.5							
G121.0	10.3	10.4	10.6							
G122.0	10.4	10.6	10.7							
G123.0	10.5	10.7	10.8							
G124.0	10.6	10.7	10.9							
G125.0	10.7	10.8	10.9							
G126.0	10.7	10.8	10.9							
G127.0	10.7	10.9	10.9							
G128.0	10.8	10.9	11.0							
G129.0	10.8	10.9	11.0							
G130.0	10.8	10.9	11.0							
G131.0	10.9	10.9	11.0							
G132.0	10.9	10.9	11.0							
G133.0	10.9	10.9	11.0							
G134.0	10.9	11.0	11.1							
G135.0	10.9	11.0	11.1							
G136.0	10.9	11.0	11.1							
G137.0	10.9	11.0	11.2							
G138.0	11.0	11.1	11.1							
G139.0	11.0	11.1	11.2							
G140.0	11.0	11.1	11.2							
G141.0	11.0	11.1	11.2							
G142.0	11.1	11.2	11.2							
G143.0	11.1	11.2	11.3							
G144.0	11.1	11.2	11.3							
G145.0	11.1	11.2	11.3							
G146.0	11.1	11.2	11.3							
G147.0	11.2	11.2	11.3							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G148.0	11.2	11.2	11.2							
G149.0	11.2	11.2	11.2							
G150.0	11.2	11.2	11.2							
G151.0	11.2	11.2	11.2							
G152.0	11.1	11.2	11.2							
G153.0	11.1	11.2	11.2							
G154.0	11.1	11.2	11.2							
G155.0	11.1	11.2	11.1							
G156.0	11.1	11.1	11.1							
G157.0	11.1	11.1	11.1							
G158.0	11.1	11.1	11.1							
G159.0	11.1	11.1	11.1							
G160.0	11.1	11.1	11.1							
G161.0	11.1	11.1	11.1							
G162.0	11.1	11.1	11.1							
G163.0	11.1	11.1	11.0							
G164.0	11.1	11.1	11.0							
G165.0	11.1	11.1	11.0							
G166.0	11.0	11.1	11.0							
G167.0	11.1	11.1	11.0							
G168.0	11.1	11.1	11.1							
G169.0	11.1	11.1	11.1							
G170.0	11.2	11.2	11.2							
G171.0	11.2	11.2	11.2							
G172.0	11.3	11.3	11.3							
G173.0	11.3	11.3	11.4							
G174.0	11.4	11.4	11.4							
G175.0	11.4	11.4	11.5							
G176.0	11.5	11.5	11.6							
G177.0	11.5	11.5	11.7							
G178.0	11.6	11.6	11.7							
G179.0	11.6	11.6	11.8							
G180.0	11.6	11.7	11.8							

C Plane (°):0.0-360.0: 5.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: LSG-1600B
 Distance: 8.140 m
 Humidity:
 Inspector: